



SeaBlaze Quattro

LED Underwater Light

Since 2008, the SeaBlaze family of underwater lights has maintained its position as the undisputed value leader in underwater lighting.

New for 2018 we proudly introduce SeaBlaze Quattro. Built on the shoulders of the world's most popular underwater light, SeaBlaze3, and leveraging the technology of its big brother SeaBlazeX, SeaBlaze Quattro boasts more than 2000 lumens, multi-mode output including cross fade, and a marine grade bronze housing. Available in white/blue dual color or dazzling Spectrum output, SeaBlaze Quattro is the new standard for high-performance value in underwater lighting.

Specifications:

Lumens:	2000+
CCT:	6500K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	25
IP Rating	IP68
Housing	Bronze

Key Features:

- Available in full-color spectrum with color cycle mode or dual-color white/blue with cross fade mode.
- Completely water sealed and IP68 compliant.
- Easy Installation – Surface mount with small 1/2' through-hull hole and simple 2-wire hook up.
- No external controller boxes required.
- Constructed of marine grade bronze and heat tempered glass.
- Over 2,000+ hour of rigorous ASTM-B117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

Product Details:

SKU	COLOR OUTPUT	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101511	Dual-Color White/Blue Cross Fade, Non-Dim	70+	6500	10-30vDC	2.1A	1.1A	2000
101510	Spectrum RGBW	70+	6500	10-30vDC	2.1A	1.1A	2000

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



RGBW
Full-Color



2K
Lumen
Output



TTP
Timed Toggle
Protocol



2-Wire
Hookup



Color
Cycle



Dry
Operation



3
Year
Warranty



Certifications:



IP Rated



European
Conformity

Ph. + (561) 272-9840 | lumiteclighting.com



Beam Pattern:


SeaBlaze Quattro - LED Underwater Light

SeaBlaze Quattro - Flood Pattern

	Illuminance at a Distance	
	Center Beam ft	Beam Width
4.37	13.3 ft	2.1 ft 5.5 ft
0.74	32.5 ft	4.3 ft 11.2 ft
3.09	14.6 ft	6.4 ft 16.8 ft
17.04	8.23 ft	8.5 ft 22.3 ft
21.79	5.23 ft	10.7 ft 27.8 ft
26.07	3.64 ft	12.8 ft 33.5 ft

■ vert. Spread: 27.7°
■ Horiz. Spread: 55.5°

Illuminance at distance

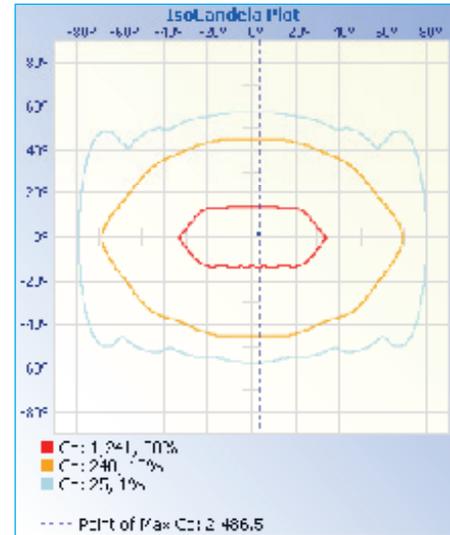

Iso Candela Plot

Dimensions:

- Diameter: 3.80in (9.65cm)
- Depth: 0.72in (1.83cm)
- Mounting Hole: 0.5 in (1.25cm)

