



6' Wall Kit Series (6' W x 8' H Backboard)

The ReadySPEC® Series is the first backboard product line in the Industry to provide a specification compliant backboard you can specify, submit, and site verify.

ReadySPEC® Wall Kits provide a convenient alternative to field fabricating full plywood sheets to fit common equipment room wall dimensions. Additionally, ReadySPEC® Backboards are now available in Bulk Project Packaging as a cost effective option when large quantities are needed.

Backboard is primed and then coated with UL® Classified Intumescent Fire Retardant latex. Select from a variety of color choices to meet your projects ANSI/TIA-606-B color-code requirements.

FEATURES

- Provides an Industry Compliant backboard ready for installation.
- Made of urea-formaldehyde resin free 3/4" A-C grade plywood to meet your "Green Building" requirements.
- Backboard panels coated with UL® Classified Intumescent Fire Retardant Latex on all sides.
- Serialized Verification Label - Plywood grade & application of UL® Classified Fire Retardant Latex detailed on product label.
- Provided with wall fasteners for installation of backboard kit on masonry, hollow block, steel and wood frame walls.
- Select kits include touch-up paint and brush.
- Select from ten color choices to meet your project ANSI/TIA-606-B color-code requirements.

COLOR OPTIONS


Replace x with color code options below:
O = ORANGE **P** = PURPLE **BN** = BROWN
Y = YELLOW **W** = WHITE **GR** = GREEN
B = BLUE **G** = GRAY **R** = RED
BK = BLACK

Made in the USA

ReadySPEC Backboards, Inc.
 Phone: 407-323-3113
 Email: sales@readyspec.com
 Web: www.readyspec.com

2021 Customer Service:

Call: 407-323-3113
 Email: sales@readyspec.com

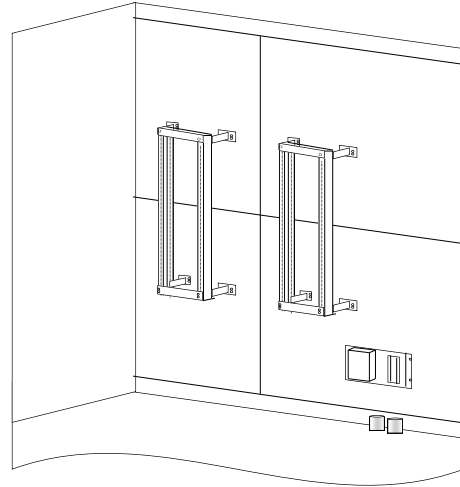

ReadySPEC® 6' Wall Kit
(Racks and equipment not included)

6' WALL KIT PART NUMBER

RB-AWALL6x 6'W x 8'H (3/4" AC Grade)
 Replace (x) with color options below.

KIT CONTENTS:

Description	Qty.
48" x 48" Backboard panel	2
48" X 24" Backboard panel	2
Concealor® * Pancake Head Screw	24
Toggle Bolt w/ Washer (1/4" x 3")	24
Touch-Up Paint (4oz. bottle with brush)	1

* The Concealor® screw self-drills into steel studs, wood studs and anchors into a pre-drilled 3/16" hole for masonry applications (#2 Square Recess Drive bit included).

SPECIFICATIONS

- Urea-formaldehyde resin free 3/4" A-C grade or better Plywood.
- Latex Primer/Sealer applied to front of plywood substrate
- UL® Classified Intumescent Fire Retardant Latex applied to all sides
- Intumescent Fire Retardant latex tested to UL723, "Test for Surface Burning Characteristics of Building Materials."
- Fire Retardant Latex Flame Spread Class "A"