


## RZR EYEBROW HEADLIGHT HARNESS




Find and Locate Your Two Pin Connector for your Fang Lights. They are located in the radiator area behind the removable grill.

Plug In Your new harness to both side of the connector and route the Long Blue wire away from heat sources to the fender well area.

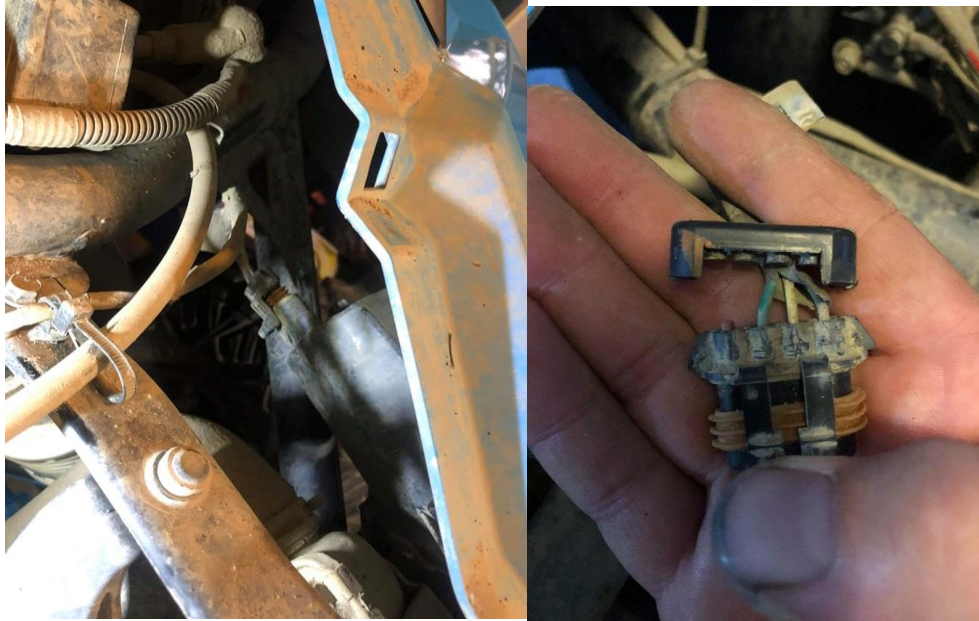

Locate the four pin connector that is located on the headlight assembly. Unplug the connector and remove the secondary lock exposing the wiring of the plug as pictured above.

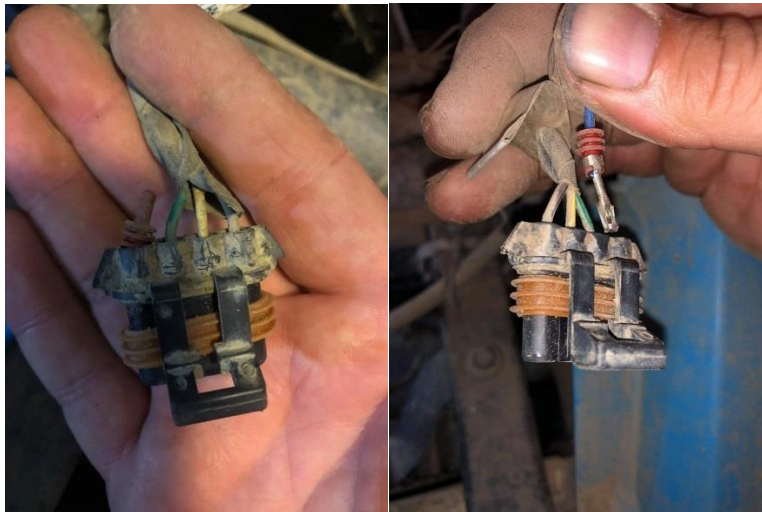

Remove the red dummy plug from the empty slot and install the new blue wire provided in the wiring harness.

Reinstall the secondary lock and plug the connector back into the headlight assembly.

Your eyebrow lights will now operate with your fang lights with the Key on.

**Folks with a 19+ RYCO street legal kit**

The ryco kits comes with different fang assemblies and uses a red 3 pin plug

This plug is not OEM Polaris, please use the OEM 2 pin Polaris plug that matches our harness

Polaris plug is usually located upper corners in front of the radiator behind the grill