



TITAN

SOLAR PANEL

HIGH EFFICIENCY
PREMIUM
MONO-PERC
PV MODULE



CHUBB®

* Chubb provides error and omission insurance to Silfab Solar Inc.

SIL-370 NX
POWERED BY
SILFAB SOLAR



INDUSTRY LEADING WARRANTY


The Titan Solar Panel is manufactured by Silfab Solar and includes an industry leading 25-year product workmanship and 30-year performance warranty.

MAXIMUM ENERGY OUTPUT

Leveraging over 35+ years of worldwide experience in the solar industry, Silfab is dedicated to superior manufacturing processes and innovations such as Bifacial and Back Contact technologies, to ensure our partners, such as Titan Solar have the latest in solar innovation.

NORTH AMERICAN QUALITY

Silfab is the leading automated solar module manufacturer in North America. Utilizing premium quality materials and strict quality control management to deliver the highest efficiency, premium quality PV modules.

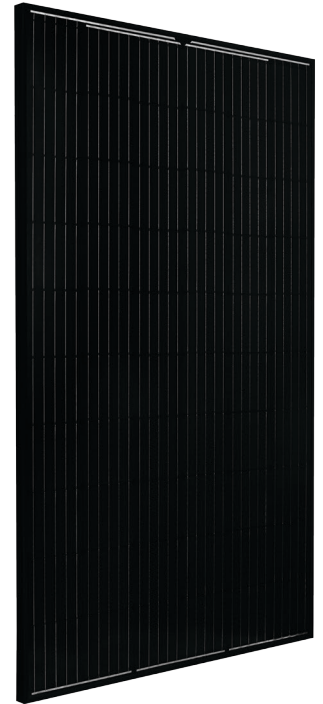

☐ BAA / ARRA COMPLIANT

These panels are designed and manufactured to meet Buy American Act Compliance. The US State Department, US Military and FAA have all utilized Silfab panels in their solar installations.

☐ LIGHT AND DURABLE

Engineered to accommodate high wind load conditions for test loads validated up to 4000Pa uplift. The light-weight frame is exclusively designed for wide-ranging racking compatibility and durability.

☐ QUALITY MATTERS

Total automation ensures strict quality controls during the entire manufacturing process at ISO certified facilities.

☐ DOMESTIC SUPPORT / SERVICES

Our 500+ North American team is ready to help Titan Solar win the hearts and minds of customers, providing customer service and product delivery that is direct, efficient and local.

☐ AESTHETICALLY PLEASING

All black sleek design, ideal for high-profile residential or commercial applications.

☐ PID RESISTANT

PID Resistant due to advanced cell technology and material selection. In accordance to IEC 62804-1.

Electrical Specifications		SIL-370 NX mono PERC	
Test Conditions		STC	NOCT
Module Power (P _{max})	W _p	370	266
Maximum power voltage (V _{pmax})	V	37.2	33.7
Maximum power current (I _{pmax})	A	10.0	7.9
Open circuit voltage (V _{oc})	V	44.8	40.7
Short circuit current (I _{sc})	A	10.6	8.3
Module efficiency	%	20.2	18.2
Maximum system voltage (VDC)	V		1000
Series fuse rating	A		20
Power Tolerance	W _p		+/-3%

Measurement conditions: STC 1000 W/m² • AM 1.5 • Temperature 25 °C • NOCT 800 W/m² • AM 1.5 • Measurement uncertainty ≤ 3%
 • Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by +/-3%.

Temperature Ratings		SIL-370 NX mono PERC	
Temperature Coefficient I _{sc}		0.064 %/°C	
Temperature Coefficient V _{oc}		-0.28 %/°C	
Temperature Coefficient P _{max}		-0.36 %/°C	
NOCT (± 2°C)		46 °C	
Operating temperature		-40/+85 °C	

Mechanical Properties and Components		SIL-370 NX mono PERC	
Module weight		44±0.4 lbs	
Dimensions (H x L x D)		72.13 in x 39.4 in x 1.5 in	
Maximum surface load (wind/snow)*		83.5/112.8 lb/ft ²	
Hail impact resistance		ø 1 in at 51.6 mph	
Cells		66 - Si mono-PERC - 5 busbar, 62.25 x 62.25 in	
Glass		0.126 in high transmittance, tempered, DSM anti-reflective coating	
Cables and connectors (refer to installation manual)		47.2 in, ø 0.22 in, MC4 from Staubli	
Backsheet		High durability, superior hydrolysis and UV resistance, multi-layer dielectric film, fluorine-free PV backsheet	
Frame		Anodized Aluminum (Black)	
Bypass diodes		3 diodes-30SQ045T (45V max DC blocking voltage, 30A max forward rectified current)	
Junction Box		UL 3730 Certified, IEC 62790 Certified, IP67 rated	

Warranties		SIL-370 NX mono PERC			
Module product workmanship warranty		25 years**			
Linear power performance guarantee		30 years			
		≥ 97.1% end 1 st year	≥ 91.6% end 12 th year	≥ 85.1% end 25 th year	≥ 82.6% end 30 th year

Certifications		SIL-370 NX mono PERC			
Product		ULC ORD C1703, UL1703, CEC listed***, UL 61215-1/-1-1/-2, UL 61730-1/-2, IEC 61215-1/-1-1/-2***, IEC 61730-1/-2***, CSA C22.2#61730-1/-2, IEC 62716 Ammonia Corrosion; IEC61701:2011 Salt Mist Corrosion Certified, UL Fire Rating: Type 2 ISO9001:2015			

Factory		SIL-370 NX mono PERC			
All states except California	California				
■ Modules Per Pallet: 26	■ Modules Per Pallet: 26				
■ Pallets Per Truck: 34	■ Pallets Per Truck: 32				
■ Modules Per Truck: 884	■ Modules Per Truck: 832				

*▲ Warning: Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

**12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at www.silfabsolar.com.

***Certification and CEC listing in progress.

PAN files generated from 3rd party performance data are available for download at: www.silfabsolar.com/downloads.

TITAN
SOLAR POWER

Titan Solar Power
525 W Baseline Rd
Mesa, AZ 85210
Tel 855 SAY-SOLAR
Titansolarpower.com
info@titansolarpower

Silfab
SOLAR

Silfab Solar Inc.
240 Courtneypark Drive East
Mississauga ON L5T 2Y3 Canada
Tel +1 905-255-2501 | Fax +1 905-696-0267
info@silfabsolar.com | www.silfabsolar.com



Silfab Solar Inc.
800 Cornwall Ave
Bellingham WA 98225 USA
Tel +1 360-569-4733

