

SAMARO

F L O O R I N G



SAMARO

F L O O R I N G



The **Laminate Performance Tile** popularly known as SPC globally, lays stunning wood and stone effects at your feet – be it at home, office, across public interiors or in private settings. The entire collection has been brought to life by our experienced product designers keeping the spaces important to you, in mind.

Refine your décor scheme starting from where you stand. Our wide range of flooring can meet any design challenge, and give it a creative edge. Aesthetics are finely balanced with advanced functionality such as superior durability, waterproof and an immensely easy-to-clean construction.

Innovation seeps into the flooring's sub-layers. An IXPE cushion backing gives spaces a pleasing

atmosphere by insulating sound and providing greater comfort under feet. The UV coating protects the surface and enhances elegance.

Our Curated series are engineered, authentically textured and highly durable, and comes in an Array of shades and Beautiful finishes – Classic Wood, Mirror Marble, Ceramic glaze, Modern Oak and Rough Hand-Scraped, Teak just to name a few.

Just imagine the possibilities!

Set the mood with an elegant, single tone or explore creative combinations. Traditional, contemporary or avant-garde, the flooring is sure to make any space, remarkable.

Did we mention how **effortless** it is to install?

Just Click-N-Lock.



FLOORING TAKES
A Step Forward

VINYL FLOORING 2.0

As a flooring option, Laminate Performance Tile popularly known as SPC globally is gaining popularity owing to a host of positive characteristics such as fine aesthetics, great durability, and a glue-free installation process.

INTRODUCING SAMARO LAMINATE PERFORMANCE TILE.

Composed of natural limestone, polyvinyl chloride and stabilizers, Samaro Laminate Performance Tile LPT is 100% waterproof, engineered, luxury vinyl flooring. It perfectly blends the beauty of wood with the strength of stone.

Laminate Performance Tiles describes the ultra-tough core of rigid core luxury vinyl flooring.

Made from 100% virgin materials, Samaro Laminate Performance Tiles is indeed a premium, future-proof offering with exceptional aesthetics.


It answers customers' growing demands for flooring solutions that are



HASSLE-FREE



HARD-WEARING



LONG-LASTING



EASY-TO-CLEAN



ECO-FRIENDLY

Presently, Samaro offers exquisite LPT designs in a wide variety of specifications and sizes, to enhance Residential, Light Commercial and Commercial environments.

The selection of designs is available in click format enabling noise-free and dust-free installation, as well as easy maintenance.

KICKSTARTING THE FLOORING REVOLUTION

THE SAMARO LEGACY

Samaro is proud to introduce **Laminate Performance Tiles**, a revolutionary flooring product and technology which is poised to change your flooring needs, by offering **Function, Performance and Luxury**, are in affiliation with National Plastic Industries (est1952) a major manufacturer-exporter of plastic furniture, with product distribution in 36 countries globally.

Drawing from decades of experience and polymer expertise, as well as having developed manufacturing, warehousing, marketing and distribution setup, Samaro is poised and ready to fulfill flooring production capacities and logistic support, on demand.

It is our Passion and Motivation that drives us to also adapt to taste, need and aspirations of the India consumer, offering a green, recycle, hassle-free and longer lasting floor solution

NEWAGE OF FLOORING

Highly versatile

- Specially engineered for fast & mess-free installation
- Easy to maintain
- Splendid flooring solution for high-traffic, commercial spaces like Schools, Hospitals, Offices
- Easily adapts to bespoke design plans, for personal spaces

Brilliant design elevates spaces

- Laminates performance tile
- Displays superior design, stability & durability
- Combines the natural beauty of wood with the strength of stone
- Reproduces variations of raw wood grain, tonal hues & textures on a rock-solid surface

UV top coat is multi-functional

- The UV coating layer offers surface protection & wear-resistance
- Its anti-fade effect retains flooring look & longevity
- It adjusts the unnatural shine of plasticised extrusion to amplify flooring elegance

Cutting-edge IXPE cushion backing performs wonders

- It provides acoustic absorption by reducing the sound of foot tapping
- It gives the space a sophisticated atmosphere through the experience of quieter floors
- It cushions feet, enhancing the feel of softness when walking
- It increases sound insulation

INNOVATION PERFECTED



100% WATERPROOF



CLICK-N-LOCK INSTALLATION



SCRATCH RESISTANT



TERMITE PROOF



FIRE RETARDANT



STAIN PROTECTION



DUST-FREE INSTALLATION



GLUE-FREE APPLICATION




DURABILITY



100% RECYCLABLE




MADE IN INDIA



WEATHER PROOF

SPC MULTI-LAYER CROSS-SECTION

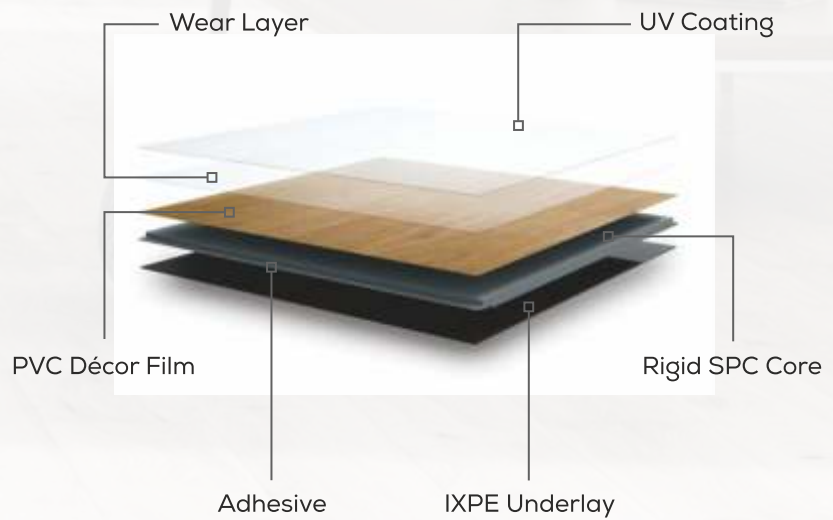

UV COATING : Our products has a protective film which prevents the surface from any damages and UV layer provides additional layer of protection for the film against fading.

WEAR LAYER: This layer is provide resistance from any kind of stains and scratches which can damage the product


PVC DECOR FILM : The decor film has various beautiful designs on the top of tile which can change the look and feel of the whole flooring

RIGID SPC CORE : SPC product's durability is based on the mixture of Stone Polymer. This composite core is the heart of our tiles.


IXPE UNDERLAY : This is a thin layer of cushion which is stuck at the back of the the tile. This reduces the tapping sound and provides underfoot comfort.

EASY 2 STEP INSTALL

Step -1



Step -2



EXCLUSIVE SHADES TO GLAM UP YOUR SPACE



Hickory Smoke Sam 0008
7.25" x 48" | 4mm / 5.5mm Thickness



Ginger Gold Sam 0017
7.25" x 48" | 4mm / 5.5mm Thickness



Ash Grey Sam 0024
7.25" x 48" | 4mm / 5.5mm Thickness

EXCLUSIVE SHADES TO GLAM UP YOUR SPACE



Ash Wood Sam 0025
7.25" x 48" | 4mm / 5.5mm Thickness



Pebble Sam 0029
7.25" x 48" | 4mm / 5.5mm Thickness



Copper Sand Sam 0030
7.25" x 48" | 4mm / 5.5mm Thickness

EXCLUSIVE SHADES TO GLAM UP YOUR SPACE



Raw Honey Sam 0031
7.25" x 48" | 4mm / 5.5mm Thickness



Cherry Wood Sam 0034
7.25" x 48" | 4mm / 5.5mm Thickness



Casper Grey Sam 0501
7.25" x 48" | 4mm / 5.5mm Thickness

EXCLUSIVE SHADES TO GLAM UP YOUR SPACE



Swiss Light Sam 0502
7.25" x 48" | 4mm / 5.5mm Thickness














Tulip Tree Sam 0503
7.25" x 48" | 4mm / 5.5mm Thickness



Vintage Oak Sam 0504
7.25" x 48" | 4mm / 5.5mm Thickness











COMPARISON - FLOORING CHART

	SPC	LAMINATE	MARBLE	TILE
 WATERPROOF	Excellent	Poor	Excellent	Excellent
 CLICK-N-LOCK INSTALLATION	Excellent	Good	Poor	Poor
 SCRATCH RESISTANT	Good	Poor	Good	Excellent
 DUST-FREE INSTALLATION	Excellent	Poor	Poor	Poor
 GLUE-FREE APPLICATION	Excellent	Poor	Poor	Poor
 DURABILITY	Very Good	Good	Excellent	Excellent
 TERMITE PROOF	Excellent	Poor	Excellent	Excellent
 FIRE RETARDANT	Excellent	Poor	Excellent	Excellent
 STAIN PROTECTION	Very Good	Poor	Poor	Good
 100% RECYCLABLE	Excellent	Good	Poor	Poor
 WEATHER PROOF	Excellent	Poor	Excellent	Excellent

SPECIFICATIONS AT A GLANCE

Whether you are creating a traditional interior or a bright modern space, Laminate Performance Tile SPC floor coverings will offer inspiration and lend an authentic, natural beauty.

TECHNICAL DETAILS

Specification	Samaro Laminate Performance Tiles
 Wear Layer	0.3 mm & 0.5 mm (12 mil & 20 mil)
 Finish	Classic Wood, Modern Oak, Rough Hand-Scraped Wood & Stone, Marble Finish, Ceramic Finish
 Sizes	PLANK 7.25" x 48" Stone 12" x 24"
 Thickness	3.5 mm – 6 mm
 Edge Profile	Micro Bevel Edge & Painted Bevel Edge
 Construction	Heterogeneous
 Attached Underlayment	High Density IXPE 1 mm
 Installation Method	Unilin Click Installation System / I4F

PERFORMANCE

Description	Standard Test
Light Stability for Colour Fastness	ASTM F1515
Dimensional Stability	ASTM F2199
Curling	ISO 23999
Short Term Indentation	ASTM F1914
Product Thickness	ASTM F386
Wear Layer Thickness	ASTM F410
Size and Squareness	ASTM F2055
Smoke Density Flaming	ASTM E662
Static of Coefficient Friction	C1028
Resistance to Impact	ASTM F1265
Stain Cleanability	NALFA 3.4
Abrasion Resistance	ASTM D4060
Critical Radiant Flux	ASTM E648

Samaro Global Industries Private Limited

 #213-215, Hubtown Solaris, N. S. Phadke Marg, Andheri (East), Mumbai - 400 069, India.

 +91 22 6766 9999 / 9936 |  www.samaro.in |  info@samaro.in



Note: Colors cannot be guaranteed to match actual flooring material, because of printing limitations.