



Business Two-way Radio S1 Efficiency in Duo



Overview

Hytera S1 redefines the business-ready analog radio. It blends classic radio elements with exquisite craftsmanship and forward fashion. From form factor to user experience, the S1 breaks with tradition to shape the trend of next-generation business radio—modern, simple, and timeless.

Instant communication is its essence. Elegance is its character. This stylish radio is ideal for those working in supermarket, franchise store, and more large-, medium-scale or multi-storey workplaces.





Antenna
(replaceable)



On-Off Key



Side PTT Key



Volume Key



Speaker



Channel Knob



Front PTT Key



Microphone



LED Indicator



Strap Hole



Belt Clip



Audio Jack (3.5 mm)



Battery





Airy-light design.

135 g in weight.
All for one-hand
operation on the go.



Beauty in simplicity.

Free from superfluous details,
resulting in a sleek, modern form.
Smooth surface and fluid curves,
making its affinity unsurpassed.



Light for U.

Four LEDs tell you the radio
status in their own way.



Receiving



Transmitting



Battery level



Let color fit your style.

Experience the captivating elegance of S1.



Pearl
white



Metallic
grey





Dual PTT. Dual standby. Dual efficiency.

Talk with either of two standby groups—not just one as before.



PTT, unlike any other.

Another PTT in the front—enlarged size, circle shape, and phonograph-record-like texture. Push to talk more easily while experiencing the spellbinding beauty.





Stay connected in the workplace.

3-5km

in urban area

3-5

floors


>10,000 square meters of
indoor space.

*The communications distance is
subject to the actual environments.



Crystal and loud.

Crystal-clear and train-loud
audios—making you get all
information easily.

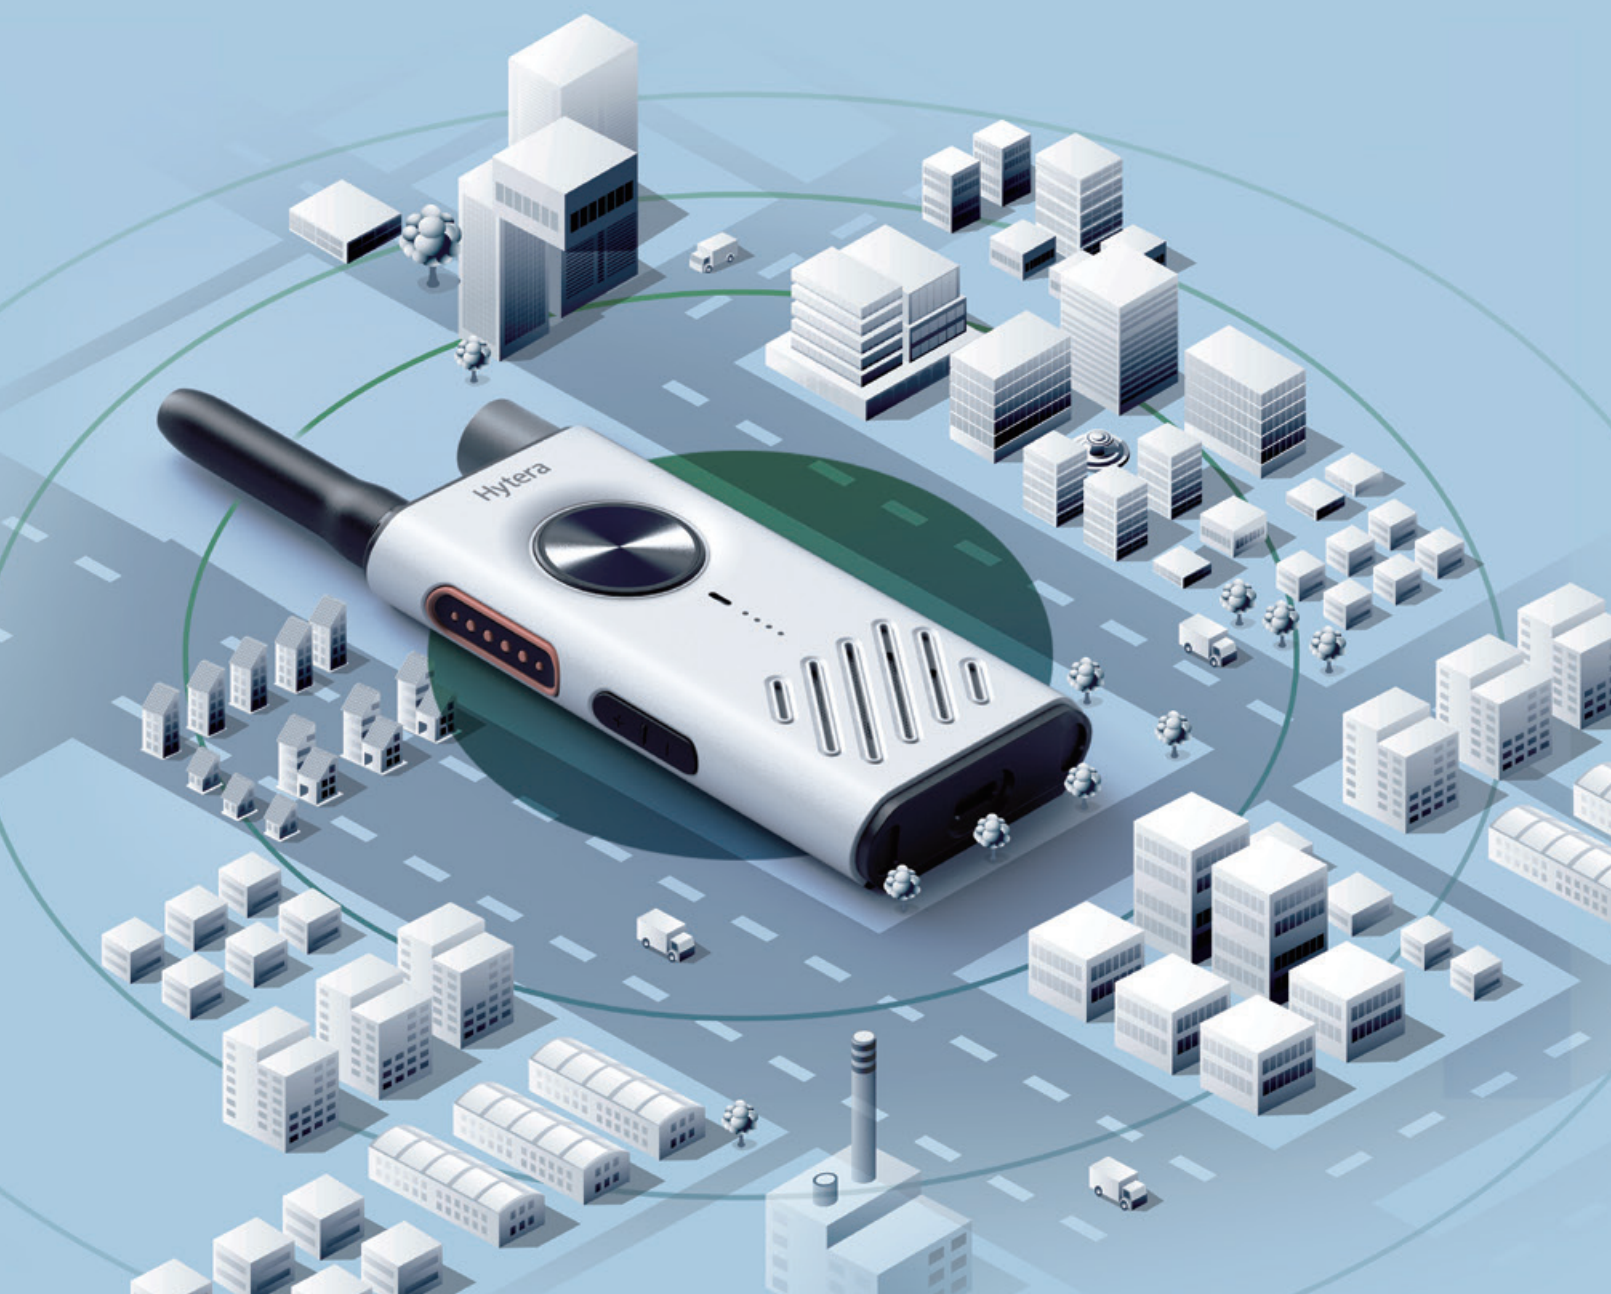



Hear it, get it.

Always give you voice notifications about channel number, battery level, configuration data, and more. Get key information without any glance.



Hands-free call.

Hytera earpiece connected. VOX (Voice Operated eXchange) on. Then, you can make a hands-free call without pressing and holding the PTT key.





New meets old in harmony.

Channel copy, easy and quick. Quickly communicate with your existing radios, regardless of brands and models.



Hytera Radio app, high-efficient.

Manage your radio with a phone, at your fingertips. Perform BT-enabled programming, batch configuration, frequency information backup, and then some.



Download APP Now



AirClone, simple and fast.

You can clone configuration data from one S1 to many. All done in a flash.





Outlast your shift.

360 hrs
standby time

15 hrs
working time

With a battery life of up to 15 hours, your focus remains on the job, not the clock.




Fast charging to refuel quickly.

USB Type-C fast charging leave you worry-free and unconstrained. 8-pocket charger, charge your batteries alone or attached on the radios in batches, easily and quickly. say goodbye to cable chaos.



Replaceable battery
Swap a spare battery for extra-long shifts.

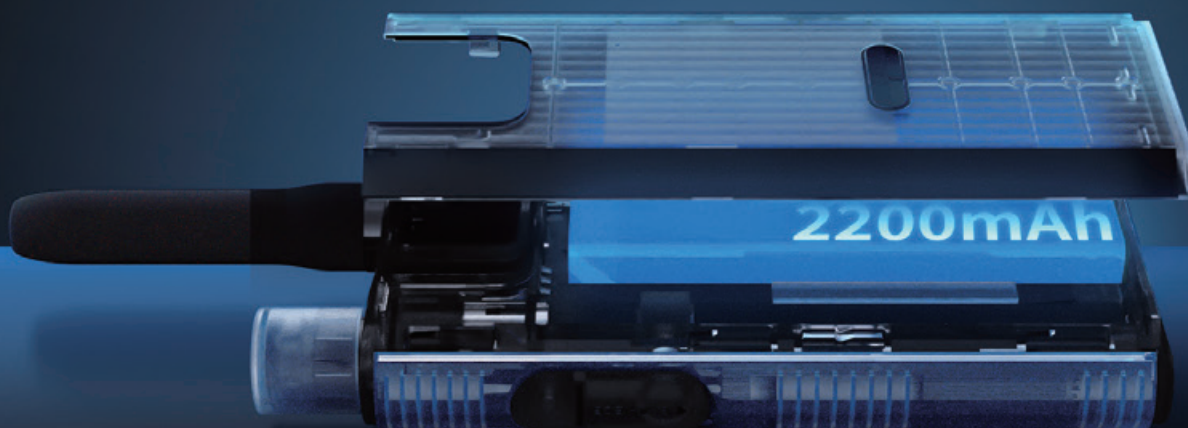



Application Scenarios



Mall



Store



Warehouse



Supermarket

Specifications

General	
Model	HYT-531
Frequency Range	400-470 MHz (Main Unit)
Channel Capacity	48
Zone Capacity	3
Channel Capacity per Zone	16
Channel Spacing	12.5 kHz/20 kHz/25 kHz
Operating Voltage	3.8 V (Rated)
Battery	2200mAh Li-Polymer
Battery Life (5/5/90 Duty Cycle, TX Power)*	15 hrs (3W)/22 hrs (1W)
Frequency Stability	±2ppm
Antenna Impedance	50Ω
Dimensions (HxWxD)	108*53*20mm (Without antenna)
Weight (With battery and antenna)	145 g (With belt clip) 135 g (Without belt clip)
Display	/
BT	BLE (only data) 5.0
Receiver	
Sensitivity	0.14μV
Adjacent Channel Selectivity	ETSI: 60dB@12.5kHz / 70dB@20/25kHz
Intermodulation	ETSI: 65dB@12.5/20/25kHz
Spurious Response Rejection	ETSI: 70dB@12.5/20/25kHz
Blocking	ETSI: 84dB
Hum&Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Rated Audio Power Output	0.5W
Rated Audio Distortion	≤5%
Audio Response	+1 to -3dB
Conducted Spurious Emission	<-57dBm
Transmitter	
Power Output	400-470 MHz: 1W/3W (low/high)
FM Modulation	11K0F3E@12.5kHz 14K0F3E@20kHz 16K0F3E@25kHz
Conducted/Radiated Emission	-36dBm < 1GHz; -30dBm > 1GHz
Modulation Limiting	±2.5kHz@12.5kHz; ±4.0kHz@20kHz; ±5.0kHz@25kHz
FM Hum&Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Adjacent Channel Power	60dB@12.5kHz; 70dB@20/25kHz
Audio Response	+1 to -3dB
Audio Distortion	≤3%

* Data comes from Hytera labs. Actual battery life will vary.

Environment	
Operating Temperature	-10°C ~ +55°C
Storage Temperature	-30°C ~ +70°C
ESD	±4kV (Contact) ±8kV (Air)

Accessories

● Standard ● Optional



Antenna
(400-440/430-470 MHz)



Battery



Belt clip



Strap



Antenna
(9cm, 400-470 MHz)



USB Type-C
charging cable



Multi-unit charger



Earpiece




Adapter



Stay True to Our Mission

30 years of radio communications, beyond.

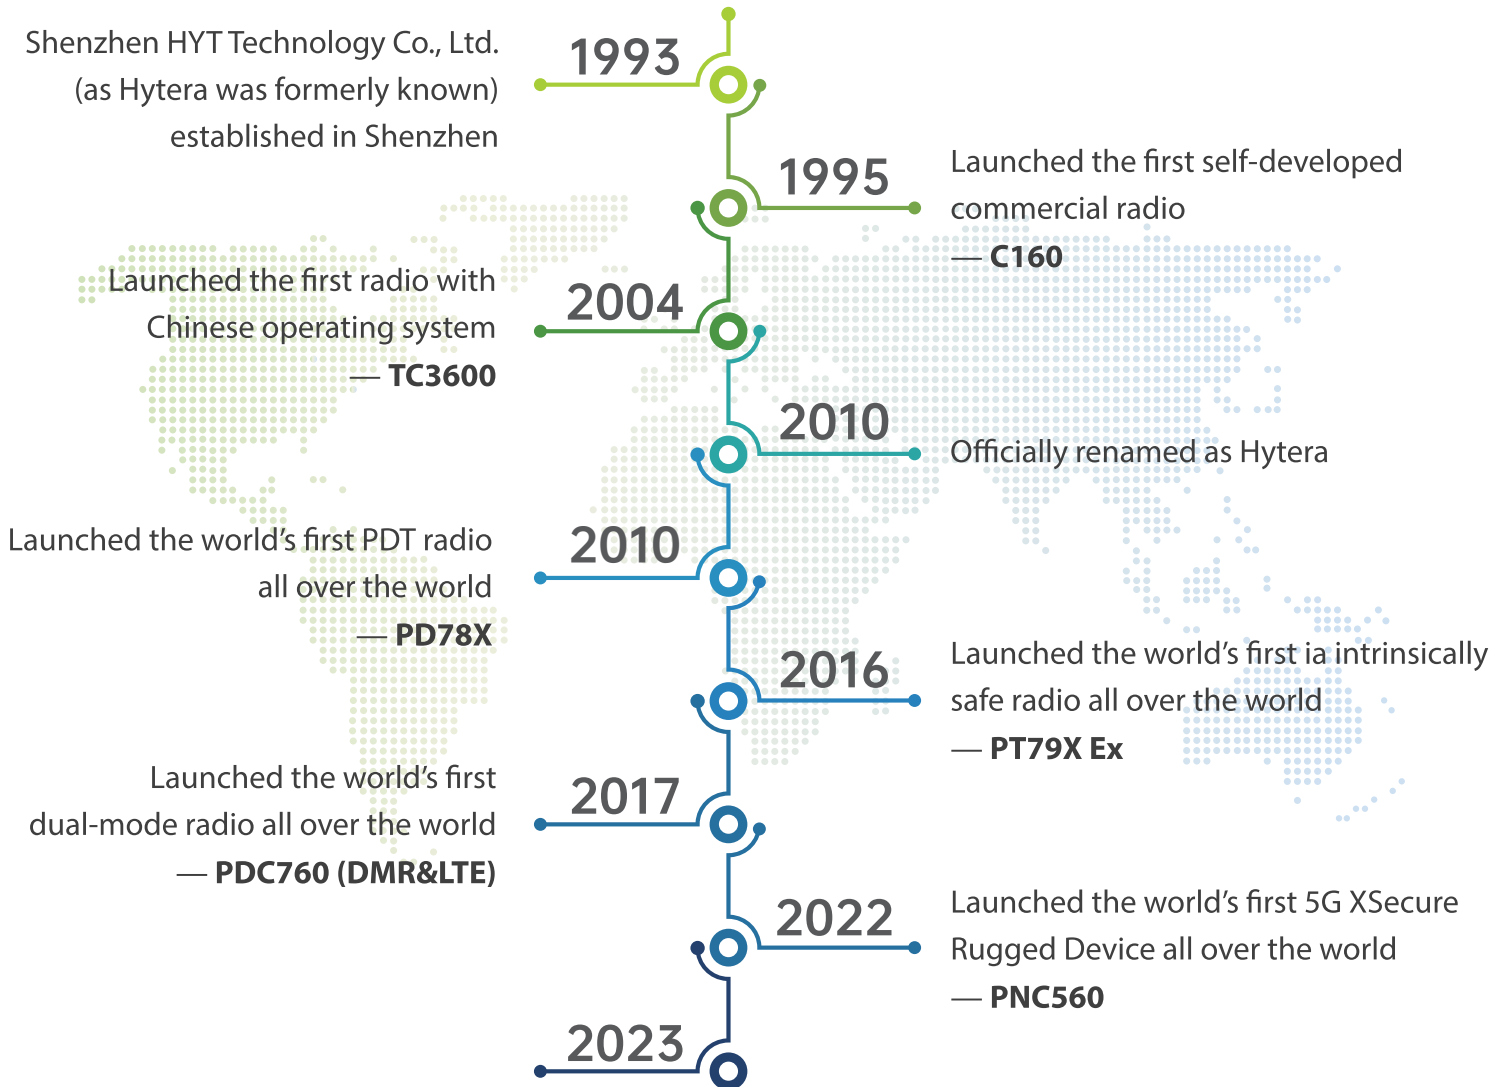

Hytera serves 20 million users for public safety, firefighting, railway, airports, factories, hotels, supermarkets, and more industries home and abroad.



S and J Telecommunications (Pty) Ltd

Address: 8 Dawnlea Rd, Malvern, Queensburgh, South Africa

Phone: 0658016732

E-Mail: jaden@sandjtelecoms.co.za