
AIO-1588/AIO-1588D Fully Alumnium Alloy Case and Stand



More Advantage:

Spill and dust Resistant, ture flat free bezel screen,

10-point PCAP touchscreen

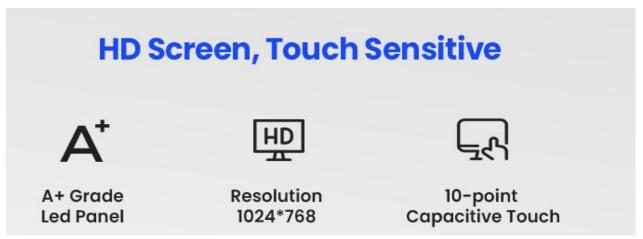

Support High speed 13/15/17 processor



USB I-button/ MSR Reader built in, easy to install/remove, It's up to you!





Hard disc detatchable design, easily and quickly to install /repair!




Removable HDD Compartment Support Large Capacity Mechanical HDD



Multiple I/O interfaces:

6 USB, 2 Serial,1*VGA,1*HDMI,1*lan,DC, Audio.

Connect it to all the peripheral devices that meet your business needs.

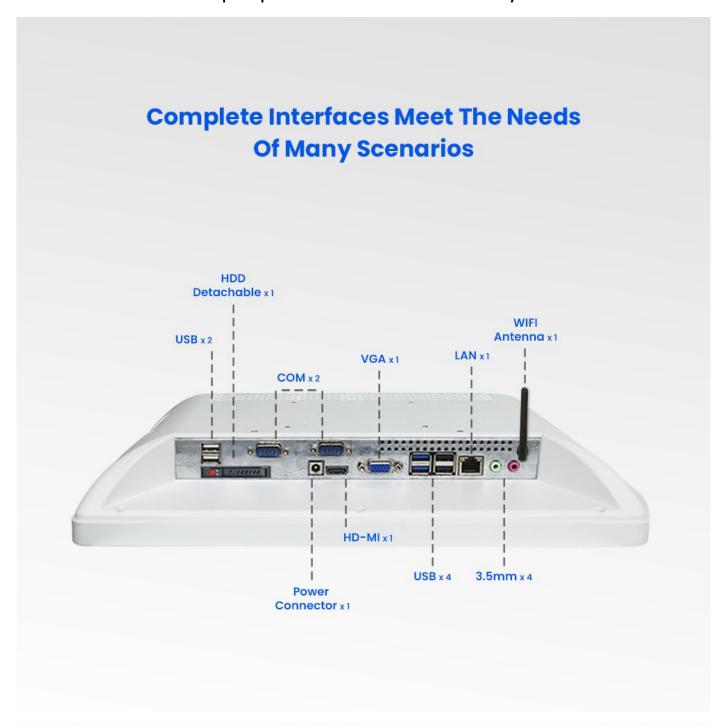

Support external device

Receipt printer

Cash drawer

Barcode scanner

Keyboard

Label printer

Scanning platform













Excellent heat dissipation.

Many Heat vents on back cover, easy come out



Full aluminum alloy big base, Foldable, with 2 rotating axes, super stable and durable



MS-09A single screen stand



MS-09B dual screen stand



Industry-standard VESA: 75*75mm/100*100mm,Place it on a counter or hang it on the wall as your business needs meet.




More size customer display for clients to choose, VFD, 7"8"9.7",10.1, 12" 15", Easy Install them when you need,

More Size Customer Display For Clients Choose

Multiple combinations, free combination of multiple scenes









7"8"9.7" Inch Touch or Non Touch



12" 15" Inch Touch or Non Touch

Also Customer display can built in back cover, removable design, by your choice.





Two color: black, white color





Parameter	
CPU	Intel Celeron J1900, quad core Intel Core I3, dual core (fanless can customize, sink) Intel Core I5, dual core, fan (fanless can customize) Intel Core I7 option Android: RK3288/RK3299
RAM	4G DDR 3, 8G 16G , DDR 4 optional Android: 2G+16G/ 4G+32G
Hard disc	64G M-sata, 128G/256G SSD 500G HDD optional, Sata optional
Panel Size	15" Led display
Resolution	1024x768(15")
2 nd display optional	15"(1024*768), 12" (800*600). 9.7"(1024*768). 8" (800*600)
Interface	USB*6 ports Com*2 ports 1*VGA HDMI LAN audio / microphone
Brightness	350cd/m2 (15")
Touch Type	10 points capacitive touch, G+G, (5 wire resistive touch available)
View Angle	Horizon: 70° Vertical: 80°
Function option	MSR built in side screen, bluetooth/wifi/1D/2D scanner/NFC/I button
Operating System	Windows 7/win 8/win 10/pos ready7/ linux
Power	12DC 5A, 12V 8A
Color	Black color (standard), white color optional
Working Temperature	Storage: -20~75℃ Operating: 0~60℃
BIOS	AMI UEFI BIOS

