AP-3665

AerPOS is an elegant and powerful all-in-one system, designed to be used in the toughest retail and hospitality environments. It is a very durable and compact system that fits beautifully on any point of sale counter. The modular design features also ensures high serviceability.

01/ 15 inch Display

02/ **White**

AerPOS is also offered with an optional white chassis.
The exterior of the alimunim is finished with a glossy smooth coating.

03/ **Slim**

Both the 15inch and 17inch displays measure less than 4 centimeters in thickness.

04/ **Easy Access**

05/ **be COLORFUL**

Color can be more than a tint, tone and hue. It can express a feeling, make a statement and show a personality.

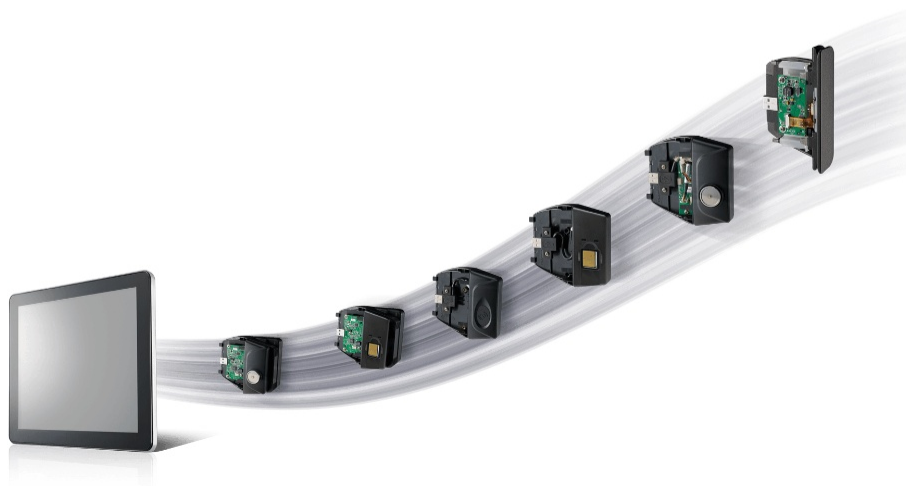By special request, we have customized different colors for many different businesses.

06/ Modular Design

Components and peripherals have been designed so that they can be installed or removed under 1 minute. The modular design of AerPOS models ensures high serviceability and reliability.

07/ Add-on Devices

There are multiple add-on devices that are available for AerPOS. There are single function devices such as MSR reader, iButton reader, fingerprint reader and RFID reader. There are also 2-in-1 devices that combine the MSR reader with an iButton, Fingerprint or RFID reader.

08/ Customer Display or 2nd Display

Choose between a pole type and non-pole type customer display. There is a between Liquid Crystal Display (LCD) with LED backlight and Vacuum Fluorescent Display (VFD). Each model allows for easy programming with escape sequence commands and features adjustable display height, display swivel and tilt.

Enhance the customer experience by showing the latest store promotion and other relevant information at the checkout. Choose between an 11inch and 15inch display.

Specifications

CPU
- Intel® Celeron® G3900TE, 2.3Ghz
- Intel® Core i3-7101TE, 3.4Ghz
- Intel® Core i5-7500T, 2.7Ghz
- Intel® Core i7-7700T, 2.9Ghz

Memory
- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)

Storage
- 1 x 2.5" SATA HDD or SSD
- 1 x M.2 Storage (Optional)

Speaker
- 2 x 2W Internal Speaker

Display
- 15" TFT , 1024 x 768

Touch
- 5-Wire Resistive
- True-Flat PCAP

Brightness
- 350 nits

MTBF
- 50K Hours

Power
- 12V / 150W External Power Adaptor

OS
- Windows 10

Certification
- FCC / CE Class B

Appearance
- Aluminum Die-casting + Plastic + Glass
- Black with Silver Trim
- White with Silver Trim

Temperature
- Operation: 0˚C ~ 40˚C (32˚F ~ 104˚F)
- Storage: -20˚C ~ 60˚C (-4˚F ~ 130˚F)

Dimensions (W x H x D)
- Product: 370 x 360 x 235 mm
- Carton: 477 x 307 x 448 mm

Weight

- Net: 7.1 Kg
- Gross: 9.1 Kg

Port

- 2 x DB9 (COM 1 & COM 2), 2 x RJ45 (COM 3 & COM 4)
- 4 x USB Port (2 x USB 2.0, 2 x USB 3.0)
- 1 x RJ11 Cash Drawer (12V)
- 1 x RJ45 GigaLAN
- 1 x Line Out, 1 x Mic In
- 1 x VGA (5V/12V jumper setting)
- 1 x 12V DC Input
- 1 x 12V DC Jack 2.5 mm Output

- Side I/O Interface:
  1 x USB 2.0 Type A

Optional

- Type A: 1 x DB9 (COMA); 1 x PUSB 12V; 2 x USB2.0
- Type B: 1 x PUSB 24V
- Type C: 1 x PUSB 24V; 2 x PUSB 12V