




**GO CHIEH-I
GO BEST SOLUTION**

2025 Chien-I CATALOGUE

CHIEN-I Enterprise.co.,Ltd.

ABOUT US

CHIEN-I SINCE 1979

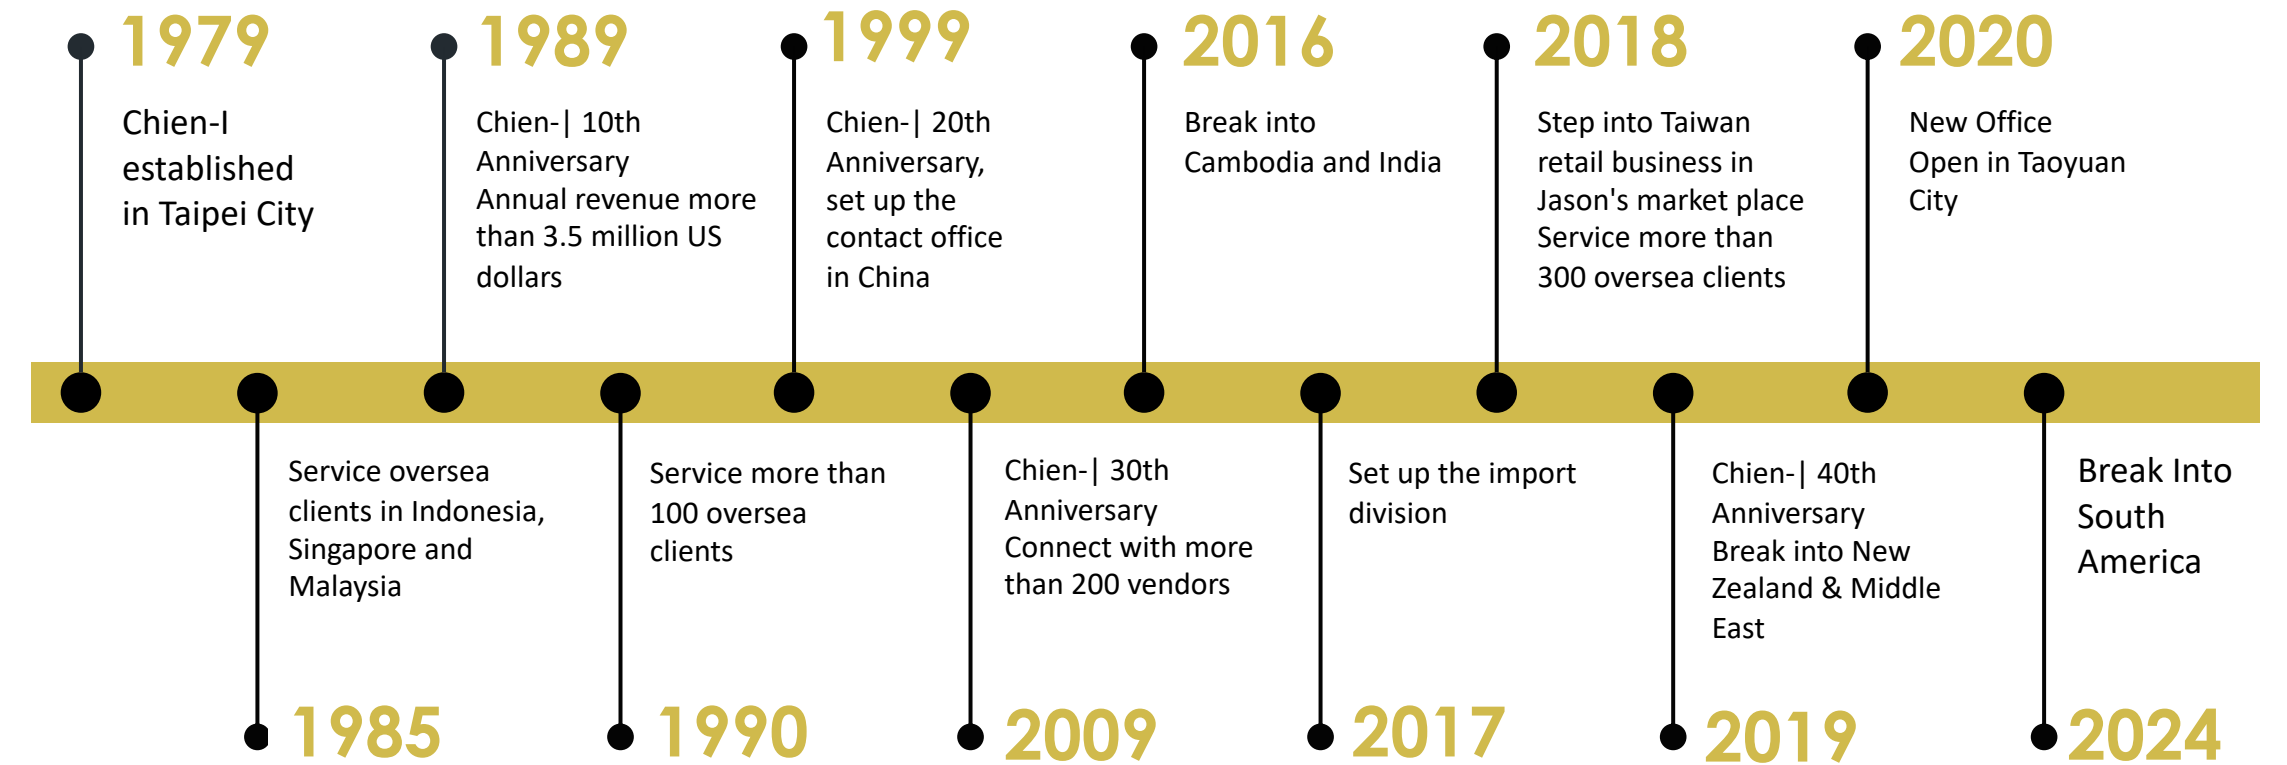

MOUNTAIN

ROAD

GRAVEL

URBAN

KIDS

GEARS

Full Suspension

AERO

Carbon

Comfort

BMX race

Fork

Hardtail

Lightweight

Alloy

Cross

Push bike

Dropper

Endurance

Kids 20'

Rims


Kids 16'

Axles



CIF-M-201

Type	Full Suspension
Frame	Full Carbon Fiber-Boost, 12*148mm thru-axle
Size	S/M/L
Brake Type	Disc
Wheel size	29"
Max Tire	29 x 2.4 “ / 27.5 x 2.8"
Rear shock Size	185*55mm
Front Travel	130mm
Rear Travel	120mm
Head Tube	1-1/2 to 1-1/2
Seatpost	31.6 mm
BB	PF92

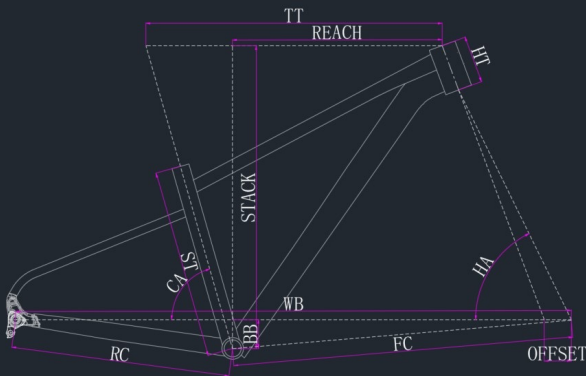


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	415	568	90	65.8°	74.2°	437	590	401
M	440	596	90	65.8°	74.4°	437	591	432
L	490	620	105	65.8°	74.9°	437	605	458
XL	540	648	115	65.8°	75.3°	437	615	487

CIF-M-202

MOUNTAIN

HARDTAIL

Type	Hardtail
Frame	Full Carbon Fiber-Boost, 12*148mm thru-axle
Size	S/M/L
Brake Type	Disc
Wheel size	29"
Max Tire	29 x 2.35"
Head Tube	1-1/2 to 1-1/2
Seatpost	27.2mm
BB	PF92

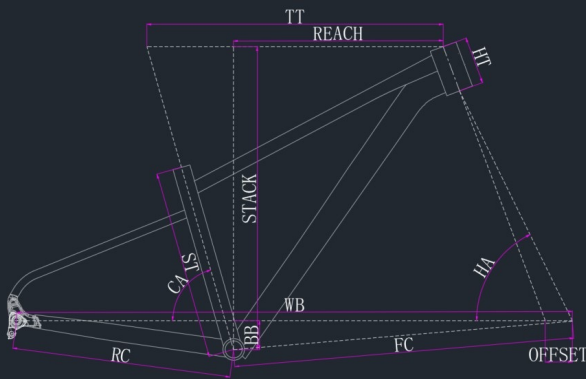

SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	400	579	95	68.5°	74°	435	608	405
M	430	604	100	68.5°	74°	435	610	429
L	470	625	110	68.5°	74°	435	622	450
XL	520	650	125	68.5°	74°	435	636	471


Type	Hardtail
Frame	Alloy 6061 Boost, 12*148mm thru-axle
Size	S/M/L
Brake Type	Disc
Wheel size	29"
Max Tire	29 x 2.5"
Head Tube	1-1/8 to 1-1/2
Seatpost	30.9mm
BB	PF92



CIF-M-208

MOUNTAIN

HARDTAIL

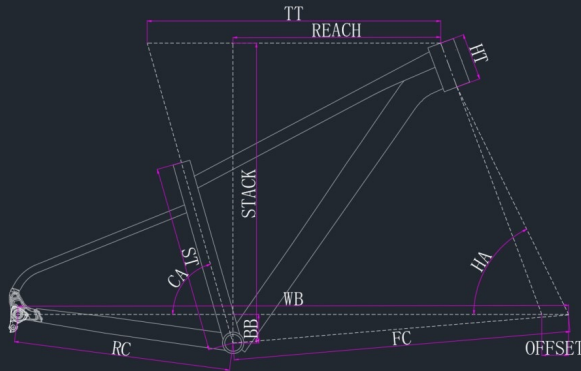


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	380	592	95	66.0°	75.0°	435	622	425
M	430	612	95	66.0°	75.0°	435	622	445
L	465	639	105	66.0°	75.0°	435	631	470

CIF-M-204 / 205

MOUNTAIN

HARDTAIL

Type	Hardtail
Frame	Alloy 6061, QR
Size	S/M/L
Brake Type	Disc
Wheel size	29" / 27.5"
Max Tire	29" / 27.5 x 2.44"
Head Tube	1-1/8
Seatpost	30.9mm
BB	BSA 73

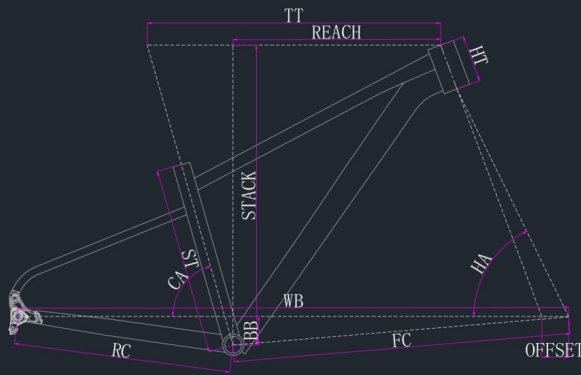

SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S (27.5")	385	569	115	67.5°	74.0°	440	571	405
S (29")	390	577	95	68.5°	74.0°	455	602	410
M (27.5")	430	559	130	67.5°	74.0°	440	598	425
M (29")	430	597	105	68.5°	74.0°	455	611	425


Type	Hardtail
Frame	Alloy 6061, QR
Size	XS/S/M
Brake Type	Disc
Wheel size	27.5"
Max Tire	27.5 x 2.2"
Head Tube	1-1/8
Seatpost	30.9mm
BB	BSA 73



CIF-M-207

MOUNTAIN

HARDTAIL W

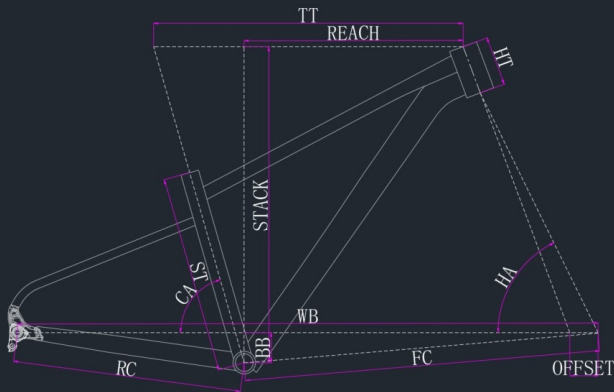


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
XS (27.5")	325	542	95	68.0°	74.0°	440	554	380
S (27.5")	365	571	100	68.0°	74.0°	440	579	399
M (27.5")	405	594	110	68.0°	74.0°	440	588	418

CIF-M-208

MOUNTAIN

HARDTAIL

Type	Hardtail
Frame	Alloy 6061 Boost, 12*148mm thru-axle
Size	S/M/L
Brake Type	Disc
Wheel size	29"
Max Tire	29 x 2.4"
Head Tube	1-1/8 to 1-1/2
Seat-post	30.9mm
BB	PF92

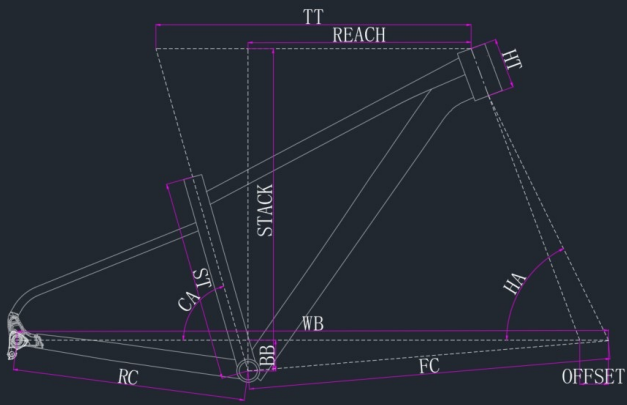


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	380	595	105	69.5	74	440	607	421
M	431	614	105	69.5	74	440	607	440
L	475	635	115	70	74	440	618	458

CIF-R-001

ROAD

AERO

- Type Aero
- Frame Full Carbon Fiber, 12*142mm thru-axle
- Fork Full Carbon Fiber, 12*100mm thru-axle
- Size 52/54/56 cm
- Max Tire 700 x 32C
- Brake Type Disc
- Head Tube 1-1/2 to 1-1/2
- BB PF86.5

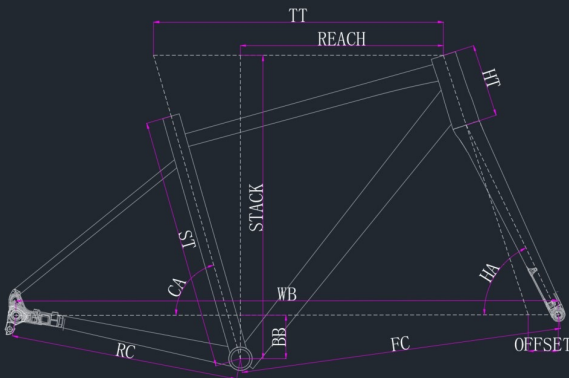


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
52	500	530	115	72.5°	74°	405	530	378
54	520	540	135	73°	74°	405	552	382
56	540	562	155	73.5°	73.5°	405	572	393

- Type Lightweight
- Frame Full Carbon Fiber, 12*142mm thru-axle
- Fork Full Carbon Fiber, 12*100mm thru-axle
- Size 52/54/56 cm
- Max Tire 700 x 32C
- Brake Type Disc
- Head Tube 1-1/2 to 1-1/2
- BB PF86.5

CIF-R-002

ROAD

LIGHTWEIGHT

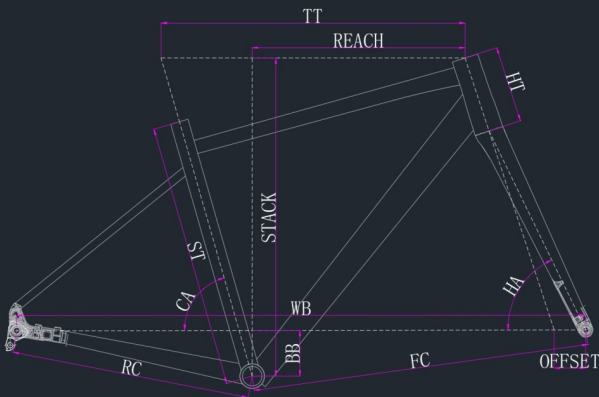


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
52	465	531	115	71.5°	74°	406	524	380
54	485	543	135	72°	74°	406	545	386
56	505	562	155	72.5°	73.5°	406	565	395

- Type Endurance
- Frame Alloy 6061, 12*142mm thru-axle
- Fork Full Carbon Fiber, 12*100mm thru-axle
- Size S/M/L
- Max Tire 700 x 38C
- Brake Type Disc
- Head Tube 1-1/4 to 1-1/8
- Seat-post 27.2mm
- BB BSA 68

CIF-R-008

ROAD

ENDURANCE

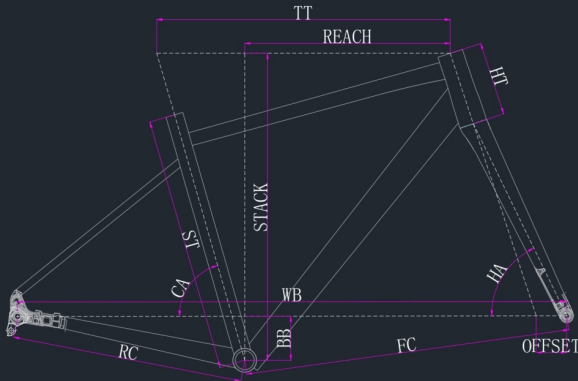


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	420	590	115	70.5	73	450	606	420
M	460	600	130	70.5	73	450	620	440
L	500	610	145	70.5	73	450	634	460

CIF-G-301

GRAVEL

CARBON

- Type Carbon
- Frame Full Carbon Fiber, 12*142mm thru-axle
- Fork Full Carbon Fiber, 12*100mm thru-axle
- Size 49/52/54/56/58 cm
- Max Tire 700 x 45C
- Brake Type Disc
- Head Tube 1-1/2 to 1-1/2
- BB T47 (68mm)

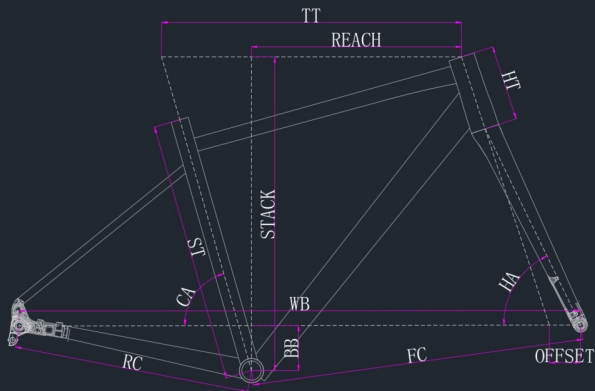


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
49	470	521	110	70.5°	74°	435	542	365
52	495	539	125	71°	73.5°	435	558	373
54	520	553	145	71.5°	73.5°	435	579	381
56	545	568	165	71.5°	73.5°	435	598	390
58	570	583	185	71.5°	73.5°	435	617	399

- Type Alloy
- Frame Alloy 6061, 12*142mm thru-axle
- Fork Full Carbon Fiber, 12*100mm thru-axle
- Size S/M/L
- Max Tire 700 x 50C
- Brake Type Disc
- Head Tube 1-1/2 to 1-1/2
- Seatpost 27.2mm
- BB PF86.5

CIF-G-302

GRAVEL

ALLOY

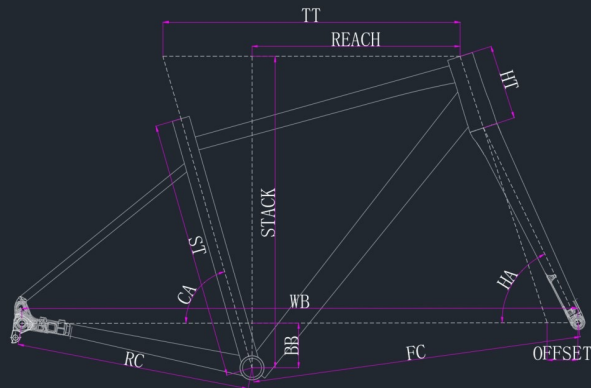


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	520	538.9	123	70.5°	74°	435	547.2	382
M	540	561.3	143	71°	73.0°	439	570	387
L	560	577.7	163	71°	72.5°	439	588.9	392

- Type Comfort
- Frame Alloy 6061, QR
- Fork Alloy 6061, QR
- Size S/M/L
- Max Tire 700 x 38C
- Brake Type Disc
- Head Tube 1-1/4 to 1-1/8
- Seatpost 27.2mm
- BB BSA 68

CIF-U-101

LIRBAN

COMFORT

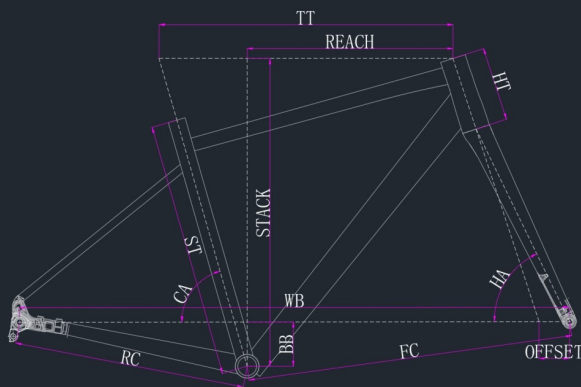


SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	430	565	115	70.0°	73.5°	445	538	406
M	485	580	130	71.0°	73.0°	445	556	410
L	535	595	160	71.0°	73.0°	445	585	416

CIF-U-102

LIRBAN

CROSS

- Type Cross
- Frame Alloy 6061, QR
- Fork Alloy 6061, QR
- Size S/M/L
- Max Tire 700 x 42C
- Brake Type Disc
- Head Tube 1-1/4 to 1-1/8
- Seat-post 27.2mm
- BB BSA 68

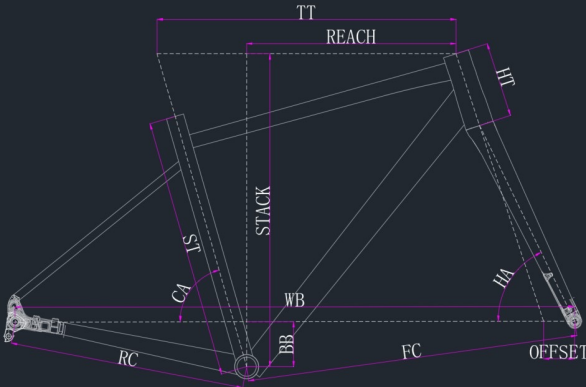

SIZE	ST	TT	HT	HA	CA	RC	STACK	REACH
S	420	590	115	70.5°	73.0°	450	606	410
M	460	600	130	70.5°	73.0°	450	620	420
L	500	610	145	70.5°	73.0°	450	634	434

KIDS

BMXRACE

CIF-BR-401

Type	Bmx Race 20"
Frame	Alloy 6061
Fork	Full cr-mo(crown)/Steel legs
Tire	KENDA 20 x 1-1/8
Seatpost	27.2mm
BB	BSA 68
Wheel	Alloy Rim & Hub
Brake	[R]: Disc Brake



BMXRACE

CIF-K-501

KIDS

PUSHBIKE

Type Push bike 12”
Frame Magnesium Alloy
Fork Magnesium Alloy
Wheel Alloy Rim & Hub



PUSHBIKE

KIDS

CIF-K-502

Type	Kids 20"
Frame	Alloy 6061
Fork	Alloy 6061
Tire	KENDA 20 x 2.0"
Seat-post	27.2mm
BB	BSA 68
Wheel	Alloy Rim & Hub
Brake	[F]/[R]: Disc Brake



KIDS

CIF-K-503

Type	Kids 16"
Frame	Steel
Fork	Steel
Seat-post	25.4mm
BB	Ball Retainer
Wheel	Steel Rim
Brake	[F]: Caliper Brake [R]: Band Brake





Carbon fiber front fork

1-1/8 Steerer	Axle to Crown: 386.8mm	Weight :350g
Max tire: 700c x 38c	Disc brake	
Rake:53.1mm	Thru-axle: 12x 100mm	



Dropper post

Travel	100mm, 125mm, 150mm	REMOTE	CNC Controller (included)
Post Diameter	27.2mm, 30.9mm, 31.6mm	SPRING	AIR
Post Length	420mm, 445mm, 511mm		



RIMS

- 29er, 6061 alloy, 690g/pc, 32H, 30MM inner width, Double wall, through Axles.
- 29er, 6061 alloy, 560g/pc, 32H, 21MM inner width, Double wall. QR
- 700C, 6061 alloy, 28H, 19mm inner width, Double wall. QR



AXLES

- CUSTOMIZED LENGTH & SHAPE
- FRONT & REAR

GO CHIEH-I | Go Best Solution



CHIEN-I Enterprise.co.,Ltd.



www.gochieni.com
sales@gochieni.com



10F., No. 79, Ln. 495,
Jieshou Rd., Taoyuan Dist.,
Taoyuan City 330, Taiwan (R.O.C.)



+886-3-218-0513



+886-3-218-0503