




RHH-FHB

Reduce Hex Head Full-Hex Body Steel
 Altıköşe Sıfır Kafa Çelik






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	RHH-FHB-0425	0.5-2.5	6.7	6.0	5.9	7.0	0.5	11.0
	RHH-FHB-0450	2.5-5.0						13.5
M5	RHH-FHB-0530	0.5-3.0	9.0	7.0	6.9	8.0	0.5	14.5
	RHH-FHB-0550	3.0-5.0						16.0
M6	RHH-FHB-0635	1.0-3.5	10.0	9.0	8.9	10.0	0.6	16.0
	RHH-FHB-0660	3.5-6.0						18.0
M8	RHH-FHB-0840	1.0-4.0	11.5	11.0	10.9	12.0	0.65	18.0
	RHH-FHB-0860	4.0-6.0						20.0
M10	RHH-FHB-1035	1.0-3.5	12.5	13.0	12.9	14.5	0.75	19.0
	RHH-FHB-1060	3.5-6.0						23.5
M12	RHH-FHB-1240	1.0-4.0	15.5	16.0	15.9	17.5	1.0	25.0

RHH-FHBC

Reduce Hex Head Full-Hex Body Close End Steel
 Altıköşe Sıfır Kafa Sızdırmaz Çelik




UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	RHH-FHBC-0425	0.5-2.5	12.3	6.0	5.9	7.0	0.5	16.0
M5	RHH-FHBC-0530	0.5-3.0	15.2	7.0	6.9	8.0	0.5	20.0
M6	RHH-FHBC-0635	0.5-3.5	14.5	9.0	8.9	10.0	0.6	20.5
M8	RHH-FHBC-0840	1.0-4.0	17.0	11.0	10.9	12.0	0.65	23.0
M10	RHH-FHBC-1045	1.0-4.5	20.0	13.0	12.9	14.5	0.75	28.5

FH-FHB

Flat Head Full Hex Body Steel
Tam Altıköşe Flanş Kafa Çelik

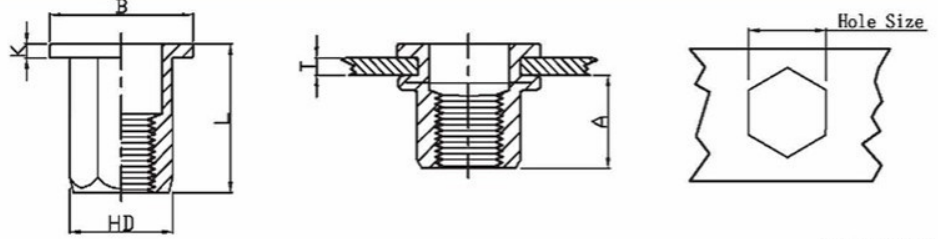


UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	FH-FHB-0420	0.5-2.0	6.5	6.0	5.9	9.0	0.8	11.0
M5	FH-FHB-0525	0.5-2.5	8.0	7.0	6.9	10.0	1.0	14.0
M6	FH-FHB-0630	0.5-3.0	8.5	9.0	8.9	12.7(*13.0)	1.35	15.0(*16.0)
M8	FH-FHB-0835	1.0-3.5	10.5	11.0	10.9	16.0	1.5	18.0
M10	FH-FHB-1035	1.0-3.5	12.5	13.0	12.9	18.0(*19.0)	1.7	21.0(*23.0)
M12	FH-FHB-1240	1.0-4.0	14.0	15.0	14.9	20.0	1.7	23.0
M10	FH-FHB-1035(12H)	1.0-3.5	13.5	12.0	11.9	18.0	1.7	21.0
M12	FH-FHB-1250(16H)	2.0-5.0	16.5	16.0	15.9	23.0	2.0	27.0

FH-FHBC

Flat Head Full Hex Body Close End Steel
Tam Altıköşe Flanş Kafa Sızdırmaz Çelik


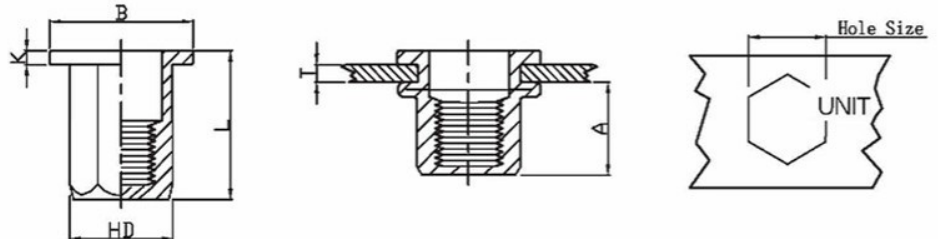


UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	HD $+0.07$ -0.1	B	K	L
M4	FH-FHBC-0420	0.5-2.0	11.0	6.0	5.9	9.0	1.0	15.0
M5	FH-FHBC-0525	0.5-2.5	13.5	7.0	6.9	10.0	1.0	18.0
M6	FH-FHBC-0630	0.5-3.0	17.0	9.0	8.9	12.7	1.5	23.0
M8	FH-FHBC-0835	1.0-3.5	19.0	11.0	10.9	16.0	1.5	26.0
M10	FH-FHBC-1040	1.0-4.0	25.0	13.0	12.9	19.0	2.0	33.0

BRN

Blind Rivet Studs Steel
Silindirik Flanş Kafa Saplama Çelik






UNIT : mm

d	e	B	E	S*	L	L1	L2*
M5	0.5-3	10	1	S=4.7-e	15	11	5.5
	0.5-3	10	1	S=4.7-e	20	11	5.5
	0.5-3	10	1	S=4.7-e	25	11	5.5
M6	0.5-3	13	1.5	S=5.4-e	15	13	7.5
	0.5-3	13	1.5	S=5.4-e	20	13	7.5
	0.5-3	13	1.5	S=5.4-e	25	13	7.5
M8	0.5-3	16	1.5	S=5.4-e	20	14	8.5
	0.5-3	16	1.5	S=5.4-e	25	14	8.5

FH-SLB

Flat Head Slotted Body Steel
Silindirik Flanş Kafa Yarıklı Çelik






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size +0.1 0	D +0.07 0.1	B	K	L
M5	FH-SLB-0545	0.5-4.5	9.6	7.5	7.4	12.7	1.0	22.0
M6	FH-SLB-0670	0.5-7.0	12.5	8.8	8.7	16.0	1.5	27.0
M8	FH-SLB-0870	1.0-7.0	14.3	11.1	11.0	19.0	1.6	30.5

FH-KB

Flat Head Knurled Body Steel
Silindirik Flanş Kafa Çelik






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	FH-KB-0315	0.5-1.5	6.0	5.0	4.9	8.0	0.8	10.0
M4	FH-KB-0420	0.5-2.0	6.0	6.0	5.9	9.0	0.8	10.5
	FH-KB-0435	2.0-3.5						12.0
M5	FH-KB-0525	0.5-2.5	7.5	7.0	6.9	10.0	1.0	13.0
	FH-KB-0550	2.5-5.0	8.5					16.5
M6	FH-KB-0630	0.5-3.0	9.2	9.0	8.9	12.30 (*13.0)	1.3	15.5
	FH-KB-0655	3.0-5.5	10.5					19.5
M8	FH-KB-0835	1.0-3.5	11.5	11.0	10.9	14.5(*16.0)	1.5	18.5
	FH-KB-0860	3.5-6.0						21.0
M10	FH-KB-1040	1.0-4.0	13.5	13.0	12.9	17.0(*19.0)	1.7	21.5
	FH-KB-1065	4.0-6.5						24.0
M12	FH-KB-1240	1.0-4.0	13.5	15.0	14.9	18.0	1.7	22.0
	FH-KB-1265	4.0-6.5	14.0					25.0
M10	FH-KB-1035(12H)	1.0-3.5	11.0	12.0	11.9	16.0	1.6	19.0
M12	FH-KB-1240(16H)	1.0-4.0	15.0	16.0	15.9	22.0	2.0	25.0
	FH-KB-1260(16H)	3.5-6.0	16.0					28.0

FH-KBC

Flat Head Knurled Body Close End Steel
Silindirik Flanş Kafa Sızdırmaz Çelik






UNIT : mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	FH-KBC-0420	0.5-2.0	11.3	6.0	5.9	9.0	0.8	16.0
	FH-KBC-0440	2.0-4.0						18.0
M5	FH-KBC-0530	0.5-3.0	11.5	7.0	6.9	10.0	1.0	17.0
	FH-KBC-0550	2.5-5.0						19.0
M6	FH-KBC-0630	0.5-3.0	12.7	9.0	8.9	12.3	1.3	19.2
	FH-KBC-0650	3.0-5.0						21.0
M8	FH-KBC-0830	0.5-3.0	14.8	11.0	10.9	15.0	1.5	21.5
	FH-KBC-0855	3.0-5.5						24.0
M10	FH-KBC-1040	1.0-4.0	19.2	13.0	12.9	17.0	1.6	27.0

RH-KB

Reduce Head Knurled Body Steel
 Silindirik Sıfır Kafa Çelik






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M3	RH-KB-0320	0.5-2.0	6.2	5.0	4.9	6.0	0.5	9.0
M4	RH-KB-0420	0.5-2.0	7.0	6.0	5.9	7.0	0.5	11.2
	RH-KB-0440	2.0-4.0						13.0
M5	RH-KB-0520	0.5-2.0	7.0	7.0	6.9	8.0	0.5	11.5
	RH-KB-0540	2.0-4.0						13.0
M6	RH-KB-0625	0.5-2.5	8.5	9.0	8.9	10.0	0.6	14.0
	RH-KB-0650	2.5-5.0						16.0
M8	RH-KB-0830	0.5-3.0	10.0	11.0	10.9	12.0	0.65	16.5
	RH-KB-0850	3.0-5.0						18.5
M10	RH-KB-1035	1.0-3.5	12.5	13.0	12.9	14.0	0.7	19.5
	RH-KB-1060	3.5-6.0						22.0
M10	RH-KB-1035(12H)	1.0-3.5	12.5	12.0	11.9	13.0	0.7	19.5
M12	RH-KB-1240	1.0-4.0	16.2	16.0	15.9	17.6	0.75	24.2

RH-KBC

Reduce Head Knurled Body Close End Steel
 Silindirik Sıfır Kafa Sızdırmaz Çelik






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	RH-KBC-0420	0.5-2.0	11.0	6.0	5.9	7.0	0.5	15.0
	RH-KBC-0435	2.0-3.5						16.5
M5	RH-KBC-0520	0.5-2.0	12.5	7.0	6.9	8.0	0.5	16.5
	RH-KBC-0535	2.0-3.5						18.0
M6	RH-KBC-0630	0.5-3.0	15.5	9.0	8.9	10.0	0.6	20.5
	RH-KBC-0645	3.0-4.5						22.0
M8	RH-KBC-0830	0.5-3.0	17.0	11.0	10.9	12.0	0.65	23.0
	RH-KBC-0845	3.0-4.5						24.5
M10	RH-KBC-1030	1.0-3.0	18.2	13.0	12.9	14.0	0.7	24.5
	RH-KBC-1050	3.0-5.0						26.0

CH-KB

Countersunk Head Knurled Body Steel
Silindir Havşa Kafa Çelik






UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-KB-0430	1.5-3.0	6.5	6.0	5.9	9.0	1.5	12.0
M5	CH-KB-0535	1.5-3.5	7.5	7.0	6.9	10.0	1.5	13.0
M6	CH-KB-0640	1.5-4.0	9.0	9.0	8.9	12.0	1.5	15.5
M8	CH-KB-0845	2.0-4.5	11.0	11.0	10.9	14.0	1.5	18.5
M10	CH-KB-1050	2.0-5.0	13.0	13.0	12.9	16.0	1.5	21.0
M12	CH-KB-1250(16H)	2.0-5.0	16.5	16.0	15.9	19.0	1.5	24.0

CH-KBC

Countersunk Head Knurled Body Close End Steel
Silindir Havşa Kafa Sızdırmaz Çelik



UNIT: mm

Thread	P/N	T(GRIP RANGE) Min Max	A Rer	Hole Size $+0.1$ 0	D $+0.07$ -0.1	B	K	L
M4	CH-KBC-0430	1.5-3.0	10.5	6.0	5.9	8.5	1.5	17.5
M5	CH-KBC-0535	1.5-3.5	11.5	7.0	6.9	9.5	1.5	20.0
M6	CH-KBC-0640	1.5-4.0	12.7	9.0	8.9	11.5	1.5	23.0
M8	CH-KBC-0840	1.5-4.0	14.0	11.0	10.9	13.5	1.5	27.0
M10	CH-KBC-1045	2.0-4.5	19.0	13.0	11.9	14.5	1.7	30.0