

Pull Out Kitchen Faucet

INSTALLATION INSTRUCTION


Accessories Checking

List of Standard Accessories:

Please double-check the accessory list below and contact our company or distributor if there are any discrepancies.


Remarks:

- 1. Accessories may be changed without prior notice, without affecting their performance.
- 2. Drawings are for reference only; actual product size and shape may vary.

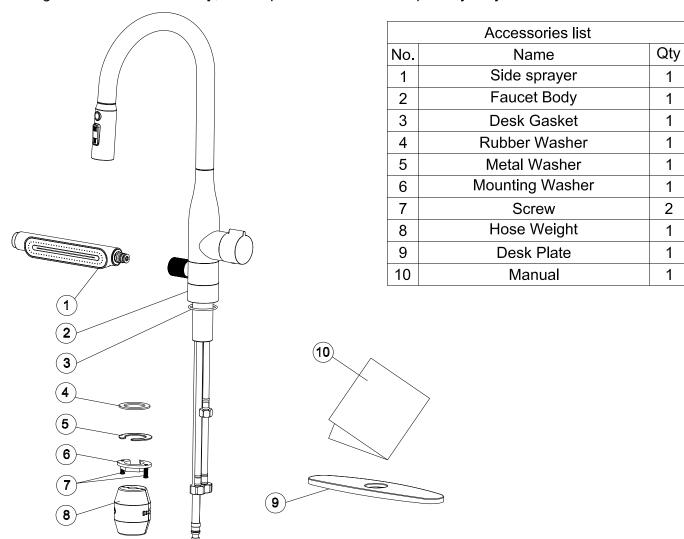


Installation Instructions


- 1. Do not disassemble the main body, as it has been installed and commissioned correctly and precisely before leaving the factory.
- 2. To avoid the faucet from jamming, flush the water pipe before installation.
- 3. After installation, make sure every joint is safely sealed and there are no leaks.
- 4. Using condition: Working pressure at 0.05-1.0 MPa (including cold and hot water pressure), with applicable water temperature: 4°C-90°C.
- 5. Make sure to connect the hot and cold inlet pipes correctly. When standing in front of the faucet, connect the hot water pipe to the left and the cold water pipe to the right.
- 6. The mounting hole size is Ø35mm.




*Installation Procedures

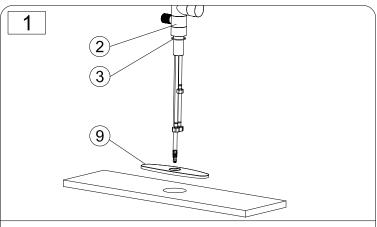


1. Retain o-ring (3) on the body (2) and thread it through the base (9) and the Ø35mm hole.

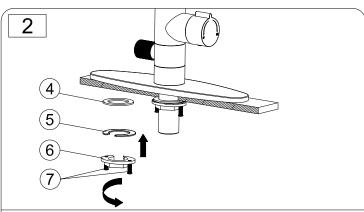

2. Install the rubber washer (4), metal washer (5), and nut (6) onto the body in sequence. Then, tighten the nut (6) and lock the screw (7).

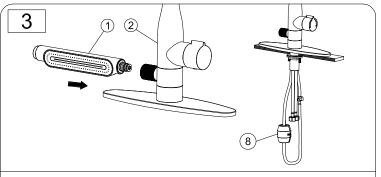


3. Slide the weight (8) over the spray hose, connect the spray hose and outlet hose, and then install the side sprayer (1).

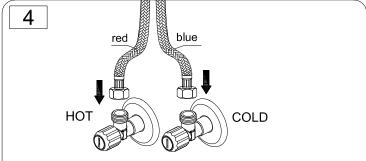



4. Attach the hoses to water supplies. The red hose should be connected to hot water, and the blue hose should be connected to cold water.

Handle Operation Guide

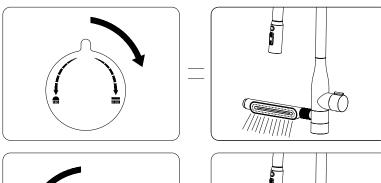

1. Rotate the handle clockwise to control the side spray. A larger rotation angle increases the water temperature. The water turns off automatically when the handle returns to the middle position.





2. Rotate the handle counterclockwise to control the spray water outlet. A larger rotation angle increases the water temperature. The water turns off automatically when the handle returns to the middle position.

Cleaning & Maintenance Representation Compared to the property of the p

To keep the product clean and shining, please follow these steps:

- 1. Flush with clean water and dry with a soft cloth only.
- 2. If there is dirt, clean it with a mild liquid detergent or transparent glass cleaner.
- 3. Do not use any abrasive detergents, polishers, scouring pads, paper tissues, or
- 4. Do not use acidic detergents, insoluble grain-based detergents, or soap.

