www.sylvania.com

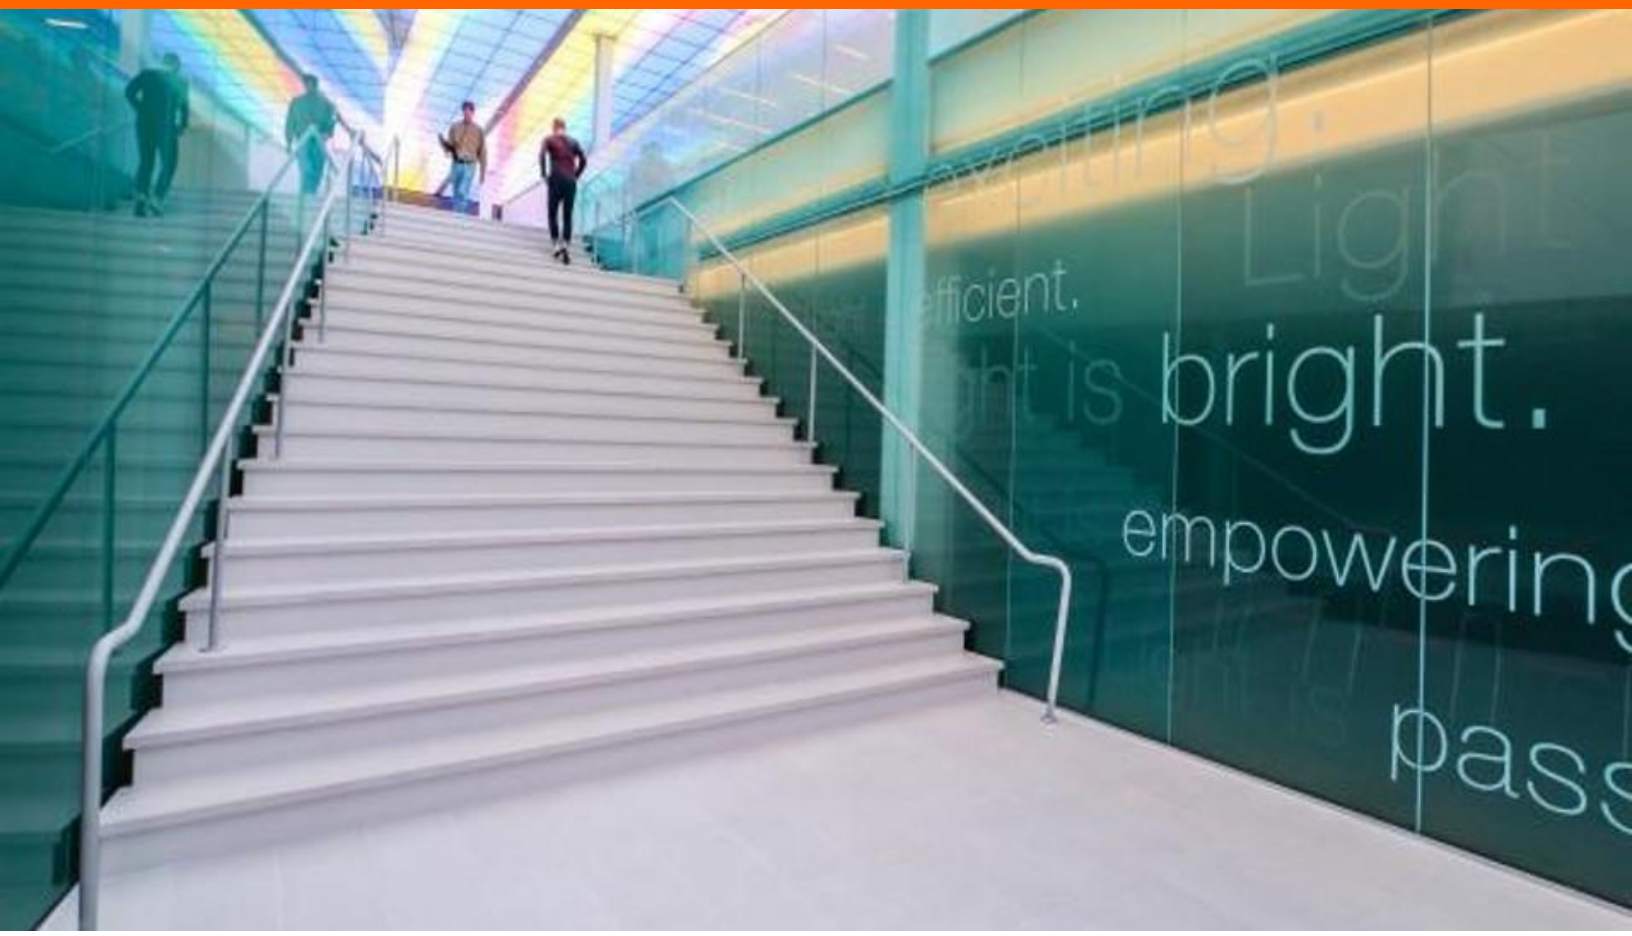

SYLVANIA LED Lamps

LEDr Council Quarterly Review
Summer 2020

VERSION 06-20

SYLVANIA

Quick Information

This facility has been helping customers since June 11, 1990

National Customer Service & Sales Center
Westfield, IN
1-800-255-5042
IC@Ledvance.com

Trade Warranty Team
1-800-654-0089
Warranty.Service@Ledvance.com

MySylvania Support
E-businesssupport@Ledvance.com

www.SYLVANIA.com

- Lighting Layout Tool
- Warranty Information
- Product Information
- eCatalog

www.MYSYLVANIA.com

- Order Tracking
- Price and Availability
- Invoices/Order History
- RMA Requests
- Damaged/Over/Short

High Lumen Lamps

ULTRA LED™ High Lumen Lamps

Key Features

- Replacement for 70-400W HID medium/mogul base applications
- Ballast bypass 120-277V (UL Type B)
- Rated life up to 50,000 hours (L70)
- Non-Dimmable
- 3000K, 4000K, or 5000K
- DLC listed (mogul base lamps only)
- Suitable for damp locations (IP64) and enclosed fixtures

Scan or click for cut sheet

SYLVANIA

Plastic LED A-Line Lamps

Contractor Series LED A19 Lamps

Key Features

- Rated life up to 11,000 hours (L70)
- Non-Dimmable
- Suitable for rough service, damp locations, and enclosed fixtures (select lamps only)

Scan or click for cut sheet

ULTRA LED™ A-line Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable down to 10%*
- Suitable for rough service, damp locations, and enclosed fixtures (select lamps only)

Scan or click for cut sheet

ULTRA LED™ 3-Way Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ High CRI A-line Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- CRI: 92+
- Suitable for rough service, damp locations and enclosed fixtures (select lamps only)

Scan or click for cut sheet

ROUGH SERVICE

ULTRA LED™ Rough Service Lamps

Key Features

- Shatter and vibration resistant
- Rated life up to 11,000 hours (L70)
- 3000K or 4100K
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ Night and Day Lamp

Key Features

- Single bulb solution for night and day usage
- 2000K, 3000K and 6500K in one product
- Rated life up to 15,000 hours (L70)

Scan or click for cut sheet

LED A19 Colored Lamps

Key Features

- Rated life up to 11,000 hours (L70)
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ Glass G25 Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable down to 10%
- Suitable for damp locations

Scan or click for cut sheet

View all general purpose LED lamps

Scan or click for insert sheet

NAED	Description (click description for PIB)	Energy Star	Wattage	Lumens	CCT	CRI
Line						
74076	LED6A19/F/827/10YV/RP	N/A	6	450	2700K	80
74077	LED6A19/F/827/10YV/RP2	N/A	6	450	2700K	80
74079	LED6A19/F/827/10YV/RP4	N/A	6	450	2700K	80
79701	LED6A19/F/835/10YV/RP	N/A	6	450	3500K	80
79703	LED6A19/F/835/10YV/RP4	N/A	6	450	3500K	80

ULTRA LED™ Motion Sensor A19

Key Features

- Built-in motion sensor turns on only when ambient light is not present
- Rated life up to 25,000 hours (L70)
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ Motion Sensor PAR38

Key Features

- Built-in motion sensor
- Rated life up to 25,000 hours (L70)
- Suitable for wet locations

Scan or click for cut sheet

ULTRA LED™ Grow Lamps

Key Features

- Spectrally-optimized for all stages of plant growth
- High output up to 25 µmol/sec
- Suitable for most plant species

Scan or click for cut sheet

ULTRA LED™ Integrated Bulb and Trim

Key Features

- Telescoping neck
- Rated life up to 25,000 hours (L70)
- Dimmable down to 25%
- 4” or 6”

Scan or click for cut sheet

ULTRA LED™ CL Closet Light

Key Features

- Screws onto existing keyless lamp holders or mounts to junction box
- Rated life up to 50,000 hours (L70)
- 700, 1200, or 2500 lumens
- Available with or without pull chain
- Non-Dimmable
- Suitable for damp locations
- Closet rated (NEC 410.16)

Scan or click for cut sheet

Plastic LED Reflector Lamps

Contractor Series LED Reflector Lamps

Key Features

- Rated life up to 11,000 hours (L70)
- Dimmable down to 10%
- 2700K, 3000K, 3500K, or 5000K
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ Reflector Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable down to 10%
- 2700K, 3000K or 5000K
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ HD Reflector Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%
- Suitable for damp locations
- 2700K or 5000K

Scan or click for cut sheet

ULTRA LED™ HO Reflector Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%
- Suitable for damp locations
- 2700K, 3500K, or 5000K

Scan or click for cut sheet

Directional Lamps (PAR/MR)

Contractor Series LED PAR Lamps

Key Features

- Rated life up to 11,000 hours (L70)
- Non-Dimmable
- Suitable for damp locations and open fixtures only

Scan or click for cut sheet

ULTRA LED™ Glass PAR Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- Suitable for wet locations and enclosed fixtures

Scan or click for cut sheet

RENAISSANCE™ LED PAR Family

Key Features

- Rated life up to 40,000 hours (L70)
- Dimmable down to 10%*
- 90+ CRI
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ HD PAR Family

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable
- 90+ CRI
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ HO PAR Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- 120V or UNV (120-277V) options
- Up to 4,200 lumens
- Dimmable (select models only)
- Suitable for wet locations

Scan or click for cut sheet

ULTRA LED™ MR16 Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ Glass MR16 Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- Suitable for damp locations

Scan or click for cut sheet

Contractor Series LED PAR16 (GU10) Lamps

Key Features

- Rated life up to 11,000 hours (L70)
- Dimmable
- Indoor use only

Scan or click for cut sheet

ULTRA LED™ Glass PAR16 Lamps

Key Features

- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- Suitable for damp locations

Scan or click for cut sheet

Additional resources for directional lamps

Scan or click for insert sheet

NAED	Description (Click description for PIB)	Energy Star	Wattage	Lumens	CBCP	CCT	CRI
79276	LED13PAR38/830/FL45/10YV/RP	NO	13	900	1250	3000K	82
79736	LED13PAR38/850/FL45/10YV/RP	NO	13	1200	1250	5000K	82
40195	LED11.5PAR38/MOT/830/W/RP	YES	11.5	1050	1800	3000K	80
40014	LED12PAR38/DIM/930/FL40/22Y/RP	YES	12	1100	1540	3000K	90
40245	LED12.5PAR38/830/FL30/GL/22Y/USA/RP2	N/A	12.5	1050	1700	3000K	80

Glass Filament LED Lamps

ULTRA LED™ Clear Glass Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ HD Glass Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- 90+ CRI
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ Vintage Glass Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- 2175K
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ Frosted Glass Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

ULTRA LED™ Glass Chrome Top A19

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ Specialty Vintage Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Non-Dimmable
- 2175K

Scan or click for cut sheet

ULTRA LED™ Spiral Vintage Lamps

Key Features

- Rated life up to 15,000 hours (L70)
- Dimmable
- 2175K

Scan or click for cut sheet

ULTRA LED™ Filament Colored Glass

Key Features

- Red, orange, yellow, blue, purple or pink
- Dimmable
- Rated life up to 15,000 hours (L70)
- Open fixtures only

Scan or click for cut sheet

View all glass filament LED lamps

Scan or click for insert sheet

NAED	Description description for PIB)	(click	Energy Star	Wattage	Lumens	CCT	CRI
Line							
74076	LED6A19/F/827/10YV/RP		N/A	6	450	2700K	80
74077	LED6A19/F/827/10YV/RP2		N/A	6	450	2700K	80
74079	LED6A19/F/827/10YV/RP4		N/A	6	450	2700K	80
79701	LED6A19/F/835/10YV/RP		N/A	6	450	3500K	80
79703	LED6A19/F/835/10YV/RP4		N/A	6	450	3500K	80

Micro-Specialty LED Lamps

SYLVANIA LED Specialty Lamps

Key Features

- Variety of shapes, sizes, and bases
- 3000K direct replacement for halogen lamps
- Long life up to 15,000 hours (L70)
- Non-dimmable
- UV and IR free
- Suitable for damp locations

Scan or click for cut sheet

Ballast Compatible LED Tubes (UL Type A)

SubstiTUBE® IPS LED T8 Glass

Key Features

- Frosted glass
- Rated life up to 60,000 hours (L70)
- Select lamps dimmable on compatible dimming ballast
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

Generation 7 | **Generation 9**

SubstiTUBE® IPS LED T8 Plastic

Key Features

- Shatterproof frosted nano-plastic
- Rated life up to 60,000 hours (L70)
- Select lamps dimmable on compatible dimming ballast
- Suitable for damp locations and enclosed fixtures
- Select lamps meet Buy America Act

Scan or click for cut sheet

SubstiTUBE® Value IS LED T8

Key Features

- For use on compatible instant start ballasts only
- Frosted glass
- Rated life up to 50,000 hours (L70)
- DLC Listed (select models only)
- Suitable for damp locations
- Non-dimmable

Scan or click for cut sheet

SubstiTUBE® LED T5HO Lamps

Key Features

- Frosted glass
- Rated life up to 50,000 hours (L70)
- Suitable for damp locations

Scan or click for cut sheet

SubstiTUBE® CURVALUME® IPS T8

Key Features

- Frosted plastic
- Rated life up to 50,000 hours (L70)
- Dimmable down to 10% with compatible 0-10V ballast
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

SubstiTUBE® LED T5HE Lamps

Key Features

- Frosted glass
- Rated life up to 50,000 hours (L70)
- DLC Listed (select models only)
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

SubstiTUBE® DULUX® L LED TT5 Lamps

Key Features

- Compatible with instant start electronic DL40 ballasts
- Rated life up to 50,000 hours (L70)
- Frosted glass
- Non-dimmable
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

SubstiTUBE® DULUX® LED Pin Base

Key Features

- Horizontal or vertical applications
- Rated life up to 50,000 hours (L70)
- Horizontal lamps have rotating bases
- Non-Dimmable
- Suitable for damp locations

Scan or click for cut sheet

Additional resources for ballast compatible tubes

Scan or click for insert sheet

	Item Number	Description (Click description for PIB)	DLC ID#	Wattage	Lumens	CCT
DUALescent™ T8 Universal Lamp						
	40587	LED12T8L48FG830AB	PLXKOIBK0AZM	12	1800	3000K
	40588	LED12T8L48FG835AB	PL68LZKMER0X	12	1800	3500K
	40589	LED12T8L48FG841AB	PLKO31GU53V6	12	1800	4100K
	40590	LED12T8L48FG850AB	PLUTNH69PWVZ	12	1800	5000K

Scan or click for ballast compatibility list

Model	Ballast Type	79544, 79545, 79546, 79547	75508, 75509, 75510, 75511	75128, 75129, 75130, 75131	75516, 75517, 75518, 75519	75520, 75521 75522, 75523
QHE 1x32T8 UNV ISL-SC	IS	Compatible	Compatible	Compatible	Compatible	Compatible
QHE 2x32T8 UNV ISL-SC	IS	Compatible	Compatible	Compatible	Compatible	Compatible
QHE 3x32T8 UNV ISL-SC	IS	Compatible	Compatible	Compatible	Compatible	Compatible
QHE 4x32T8 UNV ISL-SC	IS	Compatible	Compatible	Compatible	Compatible	Compatible

Ballast-Free LED Tubes (UL Type B) 120-277V

LEDlescent™ T8 Ballast-Free Lamps

Key Features

- Frosted glass or shatterproof nano-plastic
- Double-ended wiring with no polarity
- Patented built-in safety circuit
- Retrofit T8 or T12, shunted or non-shunted sockets
- Rated life up to 50,000 hours (L70)
- 2FT, 3FT, 4FT or 8FT
- Suitable for damp locations

Scan or click for cut sheet

LEDlescent™ T5HO Ballast-Free Lamps

Key Features

- Equivalent to FP54 T5HO
- Frosted glass
- Rated for up to 50,000 hours (L70)
- Double-ended wiring with no polarity

Scan or click for cut sheet

LEDlescent™ CURVALUME® LED T8 U-bend

Key Features

- Frosted Plastic
- Full illumination through the curve
- Rated life up to 50,000 hours (L70)
- Suitable for damp locations
- 6” leg spacing

Scan or click for cut sheet

LEDlescent™ DULUX® L LED TT5

Key Features

- Frosted glass
- Equivalent to FT40 lamps
- Use with 2G11 four-pin sockets
- Rated life up to 50,000 hours (L70)
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

Additional resources for ballast-free tubes

Scan or click for Insert sheet

	Item Number	Description (Click description for PIB)	DLC ID#	Wattage	Lumens	CCT
DUALescent™ T8 Universal Lamp						
	40587	LED12T8L48FG830AB	PLXKOIBK0AZM	12	1800	3000K
	40588	LED12T8L48FG835AB	PL68LZKMER0X	12	1800	3500K
	40589	LED12T8L48FG841AB	PLKO31GU53V6	12	1800	4100K
	40590	LED12T8L48FG850AB	PLUTNH69PWVZ	12	1800	5000K

LEDlescent™ product videos

LEDlescent™ Overview
01:56

Installation Video
02:35

Double-ended vs. Single-ended
02:18

Why LEDlescent™?
05:25

Hybrid (Dual UL Type A/B)

DUALescent™ T8 Universal Lamp

Key Features

- Use as ballast compatible or ballast-free
- Frosted Glass
- Rated life up to 50,000 hours (L70)
- Use with shunted and non-shunted sockets
- Type A is compatible with select EM ballasts
- Suitable for damp locations and enclosed fixtures

Scan or click for ballast compatibility list

Scan or click for cut sheet

External Driver (UL Type C)

OSRAM QUICKTRONIC QHE LED T8 G1

Key Features

- Parallel circuitry keeps remaining LED T8 lit if one or more go out
- 0-10V dimmable
- SubstiTRONIC™ warranty up to 8 years

Scan or click for low power system (-ISL) cut sheet

Scan or click for normal power system (-ISN) cut sheet

OSRAM QUICKTRONIC QHE LED T8 G2

Key Features

- Parallel circuitry keeps remaining LED T8 lit if one or more go out
- Will not operate fluorescent lamps
- 0-10V dimmable
- SubstiTRONIC™ warranty up to 8 years

Scan or click for low power system (-ISL) cut sheet

Scan or click for normal power system (-ISN) cut sheet

MICRODISK™ Downlight

ValueLED™ Selectable Slim MICRODISK™

Key Features

- 2700K, 3000K, 3500K, 4000K, and 5000K in one product
- 3”, 4”, 6” or 8”

Scan or click for cut sheet

UltraLED™ MICRODISK™

Key Features

- 120V or UNV (120-277V)
- 4” or 6”

Scan or click for cut sheet

Screw-based Recessed Trims with **Smooth Reflector**

ValueLED™ Contractor Series RT Screw-based Smooth Reflector

Key Features

- Rated life up to 11,000 hours (L70)
- Phase-cut dimmable
- Suitable for wet locations

Scan or click for cut sheet

ULTRA LED™ RT4 Gimbal

Key Features

- Rated life up to 50,000 hours (L70)
- Phase-cut dimmable
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ RT6 Gimbal

Key Features

- Rated life up to 50,000 hours (L70)
- Phase-cut dimmable
- Suitable for damp locations

Scan or click for cut sheet

Hi-PerformanceLED™ RT Screw-based Smooth and Baffle Reflector

Key Features

- Rated life up to 50,000 hours (L70)
- Phase-cut dimmable
- Suitable for wet locations
- Step baffle

Scan or click for cut sheet

SYLVANIA

Screw-based Recessed Trims with **Step Baffle**

UltraLED™ RT Screw-based Baffle Reflector

2700K 3000K 3500K 4000K 5000K
WARM/CHAUDE COOL/FROIDE

Key Features

- Select models are five CCT-selectable
- Rated life up to 35,000 hours (L70)
- Phase-cut dimmable
- Suitable for wet locations
- Step baffle

Scan or click for cut sheet

Hi-PerformanceLED™ RT Screw-based Smooth and Baffle Reflector

Key Features

- Rated life up to 50,000 hours (L70)
- Phase-cut dimmable
- Suitable for wet locations
- Step baffle

Scan or click for cut sheet

Other Screw-based Recessed Trims

ULTRA LED™ RT4 and RT5/6 QUAD

Key Features

- Rated life up to 50,000 hours (L70)
- Suitable for wet locations
- Available metallic trims
- Dimmable

Scan or click for cut sheet

ULTRA Light Disk LED

Key Features

- Retrofits most 4", 5" or 6" recessed housings or mounts directly to junction box
- Life up to 50,000 hours (L70)
- Dimmable
- Suitable for wet locations
- Closet rated (NEC 410.16)

Scan or click for cut sheet

View all screw-based recessed products

Scan or click for insert sheet

Hi-PerformanceLED RT Screw-based		
	74285	LEDRT4/600/927
	74286	LEDRT4/600/930
	74288	LEDRT4/600/940
	74289	LEDRT4/600/950

California Title 20 LED Lamps

ULTRA LED™ High CRI A-line Lamps

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- CEC Title 24 JA8 Listed
- Rated life up to 25,000 hours (L70)
- Suitable for enclosed fixtures (excl. 100W)
- 2700K, 3000K or 5000K
- Dimmable

Scan or click for cut sheet

ULTRA LED™ HD Reflector Lamps

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- CEC Title 24 JA8 Listed (2700K only)
- Rated life up to 25,000 hours (L70)
- 2700K or 5000K
- Dimmable

Scan or click for cut sheet

ULTRA LED™ HD PAR Lamps

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- CEC Title 24 JA8 Listed
- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%
- Suitable for damp locations

Scan or click for cut sheet

SYLVANIA

Hi-PerformanceLED™ RT Screw-based Smooth and Baffle Reflector

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- CEC Title 24 JA8 Listed (except 5000K)
- Rated life up to 50,000 hours (L70)
- Fits most 4” and 5/6” housings
- 2700K, 3000K, 4000K or 5000K
- Phase-Cut dimmable

Scan or click for cut sheet

ULTRA LED™ MR16 Lamps

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- Rated life up to 25,000 hours (L70)
- Dimmable down to 10%*
- Suitable for damp locations

Scan or click for cut sheet

ULTRA LED™ HD Glass Lamps

Key Features

- Compliant with CEC Title 20 Efficiency Standards
- Rated life up to 15,000 hours (L70)
- Suitable for damp locations and enclosed fixtures
- Dimmable
- 2700K

Scan or click for cut sheet

LED Vintage Glass Lamps

Key Features

- Available for sale in California – 2175K
- Rated life up to 15,000 hours (L70)
- Dimmable
- Suitable for damp locations and enclosed fixtures

Scan or click for cut sheet

OSRAM Drivers and Accessories – Active/PTO*

Constant Voltage	
51604	OT20W12VUNV 50/CS 1/SKU
51804	OT20W24VUNV 50/CS 1/SKU
51598	OT5012024LP 20/CS 1/SKU
51632	OT60W12VUNV OSRAM 10/CS 1/SKU
51633	OT60W12VUNVDIM OSRAM 10/CS 1/SKU
51522	OT96W24VUNV 10/CS 1/SKU
51520	OT96W24VUNVDIM 10/CS 1/SKU
51626	OT96W24VUNVJBX 16/CS 1/SKU
Programmable Indoor Compact	
57347	OTI25W1202771A2DIM1 20/CS 1/SKU
57349	OTI25W1202771A2DIM1AUX 20/CS 1/SKU
57348	OTI25W1202771A2DIM1J 20/CS 1/SKU
57350	OTI25W1202771A2DIM1JAUX 20/CS 1/SKU
57351	OTI40W1202771A4DIM1 20/CS 1/SKU
57353	OTI40W1202771A4DIM1AUX 20/CS 1/SKU
57352	OTI40W1202771A4DIM1J 20/CS 1/SKU
57354	OTI40W1202771A4DIM1JAUX 20/CS 1/SKU
57355	OTI55W1202772A0DIM1 20/CS 1/SKU
57357	OTI55W1202772A0DIM1AUX 20/CS 1/SKU
57356	OTI55W1202772A0DIM1J 20/CS 1/SKU
57358	OTI55W1202772A0DIM1JAUX 20/CS 1/SKU
Programmable Indoor Linear	
57453	OTI20120277700DIM1LAUXG2 10/CS 1/SKU
57431	OTI20120277700DIM1LG2 10/CS 1/SKU
57454	OTI301202771A0DIM1LAUXG2 10/CS 1/SKU
57433	OTI301202771A0DIM1LG2 10/CS 1/SKU
57455	OTI481202772A0DIM1LAUXG2 10/CS 1/SKU
57434	OTI481202772A0DIM1LG2 10/CS 1/SKU
57456	OTI501202771A4DIM1LAUXG2 10/CS 1/SKU
57452	OTi501202771A4DIM1LG2 10/CS 1/SKU
57420	OTI851202772A3DIM1L 10/CS 1/SKU
57421	OTI851202772A3DIM1LAUX 10/CS 1/SKU
57424	OTI851202772A3DIM1LHB 10/CS 1/SKU
57425	OTI851202772A3DIM1LHBAUX 10/CS 1/SKU
57422	OTI851202772A3DIML 10/CS 1/SKU
57426	OTI851202772A3DIMLHB 10/CS 1/SKU

Programmable Outdoor/Industrial	
79371	OT50WUNV1250C2DIMLT2P6 20/CS 1/SKU
79370	OT50WUNV800C2DIMLT2P6 20/CS 1/SKU
79278	OTI50UNV2100C2DIMLT2P6 20/CS 1/SKU
57509	OTI95WUNV2750C2DIMP6 10/CS 1/SKU
57510	OTI95WUNV2750C2DIMP6AUX 10/CS 1/SKU
79369	OT100WUNV1250C2DIMP6 20/CS 1/SKU
79368	OT100WUNV800C2DIMP6 20/CS 1/SKU
79367	OT180WUNV1250C2DIMP6 10/CS 1/SKU
79366	OT180WUNV800C2DIMP6 10/CS 1/SKU
Programmable Outdoor 347-480V	
79207	OT100W347480V1250C2DIMP6 20/CS 1/SKU
79206	OT100W347480V800C2DIMP6 20/CS 1/SKU
79209	OT180W347480V1250C2DIMP6 10/CS 1/SKU
79208	OT180W347480V800C2DIMP6 10/CS 1/SKU
Programmable	
78033	OTI301202771A0DXL 20/CS 1/SKU
78034	OTI501202771A4DXL 20/CS 1/SKU
57432	OTI851202772A3DXL 10/CS 1/SKU
Current Selectable	
79376	OT30WCS1050CUNVSDL 10/CS 1/SKU
57436	OT35WUNV0A7CSDIML 30/CS 1/SKU
57435	OT35WUNV0A7CSL 30/CS 1/SKU
79377	OT50WCS1400CUNVSDL 10/CS 1/SKU
57440	OT50WUNV1A4CSDIML 30/CS 1/SKU
57439	OT50WUNV1A4CSL 30/CS 1/SKU
57438	OT55WUNV1A2CSDIML 30/CS 1/SKU
57437	OT55WUNV1A2CSL 30/CS 1/SKU
Accessories	
51645	OTPROGRAMMER 1/CS 1/SKU Programming Tool

*PTO = Purchase to Order (allow up to 90 days)

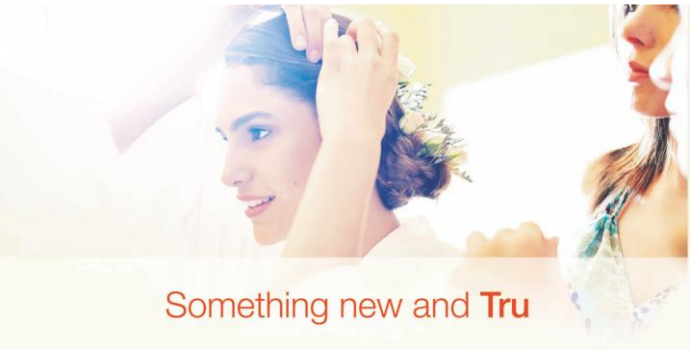

TruWave Technology™

Natural Light for Natural Living™
Natural Living is about enjoying what nature offers, in our homes with friends, families and where we work, throughout our days and our nights. Bring the benefits of Natural Light into your home for Natural Living. By delivering Natural Light for Natural Living with our new SYLVANIA Natural Series with TruWave Technology, we are adding value for our customers who want superior illumination at affordable price points.

Scan or click for Zero to Sixty product video

LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

© 2020 LEDVANCE LLC