

INDUSTRIAL DUAL FUEL ENGINE


Kubota WG Series (4-Cylinder)

WG3800-GL-E3




Rated Power

55.4 kW @ 2600 rpm (GASOLINE)
55.4 kW @ 2600 rpm (LPG)

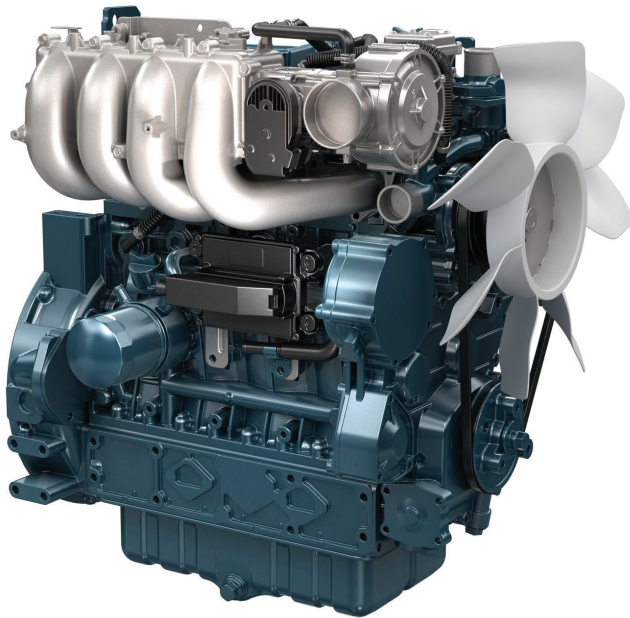

Photograph may show non-standard equipment.

Performance Curves

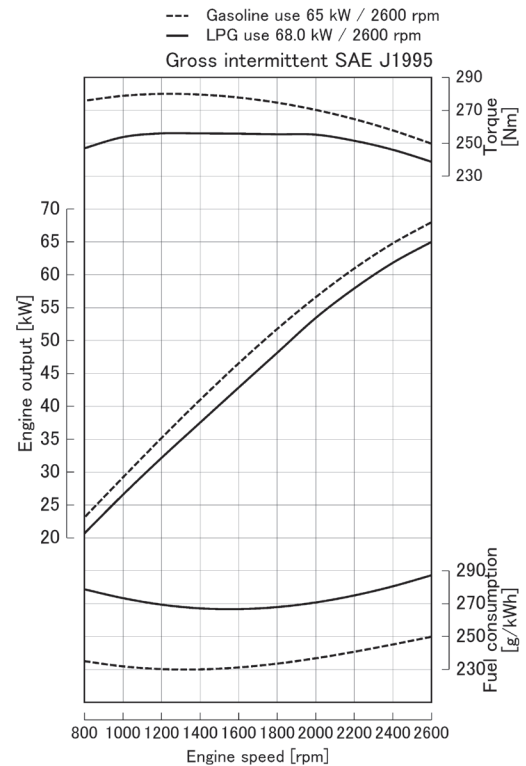

Features and Benefits

Emissions

Kubota's WG3800-GL-E3 engine has been designed to comply with EPA Tier 2 / CARB Tier 3 + EU Stage V.

Fuel Flexibility

The installation compatibility that exists between Spark-Ignition engines (SI) and Compression-Ignition engines (CI) is convenient for customers who need fuel flexibility for their products. The Kubota WG3800 includes gasoline, LPG, and natural gas versions, as well as a dual fuel version (gasoline and LPG) to meet customer needs.

Durability and Reliability

Kubota's WG3800 SI engines are designed based on Kubota V3800 diesel (CI) engines, which are known worldwide as reliable industrial engines and feature combustion chambers, as well as fuel and ignition systems dedicated for SI engines. The WG3800 engine offers very low vibration and extremely low noise.

WG3800-GL-E3

Engine Specifications

Engine model		WG3800-GL-E3	
Emission regulation		EPA Tier 2/CARB Tier 3 + EU Stage V	
Type		Vertical, water cooled 4-cycle spark ignited engine	
Fuel type		Gasoline	LPG
Cylinders		4	
Bore and stroke		mm (in)	100.0 x 120.0 (3.937 x 4.724)
Displacement		L (cu.in)	3.769 (230.0)
Aspiration		Naturally aspirated	
Aftertreatment		Three-way catalyst	
Rated output / speed *1		kW (HP)	55.4 (74.3)
		rpm	2600
Maximum torque / speed *1		Nm (lb-ft)	256.0 (188.9) 280.0 (206.5)
		rpm	1400 1200
Length x Width x Height *2		mm (in)	700 x 579 x 799 (27.6 x 22.8 x 31.5)
Dry weight *2		kg (lbs)	288 (635)

Specifications are subject to change without notice.
 Dimensions and dry weight are according to Kubota's standard specification.
 Dimensions and weight depend on completed specifications.
 LPG: Commercial liquid propane gas only. Equivalent to propane HD-5 of GPA standard.
 Natural gas: The performance shown is with Japanese standard natural gas.
 The lower heating value: 9699 kcal/m³ (1090 BTU / ft³)

*1: SAE J1995 gross intermittent

*2: Exclude cooling fan and exclude aftertreatment unit

Dimensions

