


PRODUCT INFORMATION SHEET

Model No	FC-20
Brand	FastBack, Inc
Product type	Wall mounted / Desktop / Floor stand model
Product Description	Android face recognition machine
Date	10.30.2020

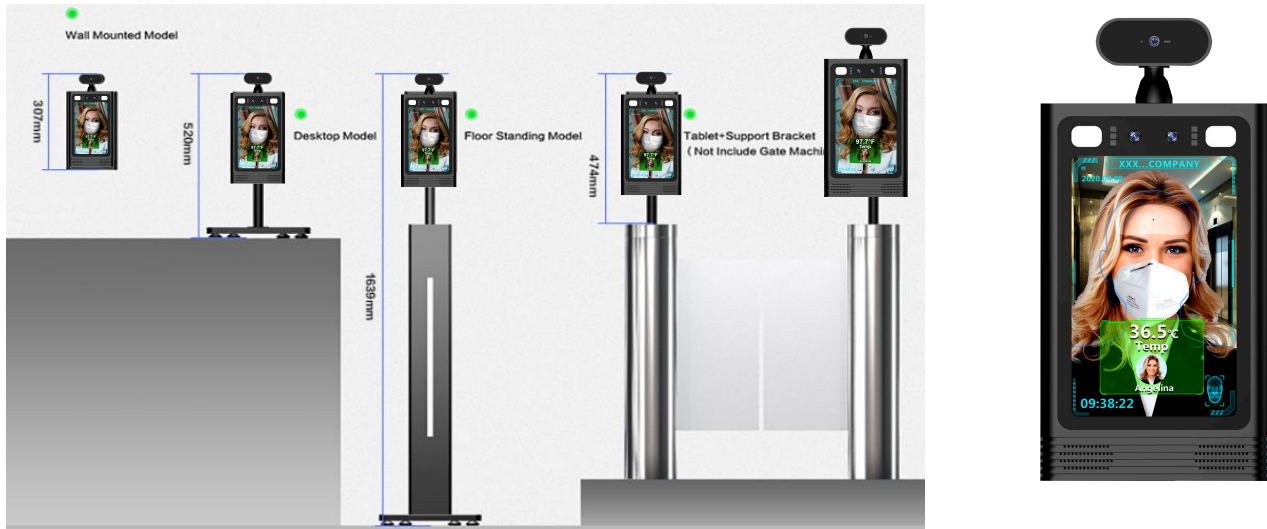

System	CPU	RK3288 quad-core Cortex-A17 @1.8G GPU Mali T764
	RAM	2GB
	Internal memory	16GB
	Operation system	Android 8.1
Display	Panel	8"
	Resolution	800*1280
	Contrast ratio	1000:1
	Brightness	350cd/m ²
	Aspect Ratio	16:10
Network	WiFi	802.11b/g/n 2.4G
	Buletooth	Bluetooth 4.1
Interface	OTG	mini USB OTG *1
	USB host	Support USB host*1
	Relay control port	Support
	Wiegand out control port	Support
	GPIO control port	Support (2 channels)
	RJ-45	10M/100MEthernet
	DC	DC power 12V input
Software	Optimum detection distance	30-50 cm
	Detection accuracy	±0.3
	Dual light multi lattice infrared thermal imaging	Accurate recognition temperature warning with data stored in cloud server
Other functions	Wireless mouse	Support
	Human body detection module	Infrared detection
	Status indicator	Tri-color LED function indicator
	High precision infrared thermal imaging detection	High precision infrared thermal imaging detection
	Speaker	2*2W
	Camera	200W 1080P Front camera
	OSD	Multilingual OSD in English/German/Italian/Japanese/Korean.....
Reliability	Operating ambient temperature	0°C~+35°C
	Optimum working environment temperature	20-27°C
	Optimum temperature range for measurement	30-45°C
	Working humidity	20%~95% Non condensing
	Storage temperature	-20°C~+60°C
	Overall power consumption	Below 18W

	Protection level	IP54
	ESD	Positive and negative 4K contact discharge/8Kv air discharge
	Surge	Support
	Harmonic	Support
Other	Adapter	12V/2A
	Installation and fixation	The standard stand is 1.1 meters high (Optional) VESA 50*50mm

Product Measurement, mm

Unit (Without packaging)			Giftbox (With Packaging)			Carton pcs/CTN		
L	W	H	L	W	H	L	W	H
Net(kg)			Net(kg)			Net		
						G.W		

