



Professional Recording Microphone




BM1200C (900/700/350) is a mini boom with a tiltable pointing front, a thin stick, at only 8mm in diameter, which integrated with a pre-stage next to the capsule attached. The whole mini boom equal to a pre-stage, with electronics built next to the condenser capsule so that to maintain highest performance, and extend the XLR plug to the lower end of the boom, so that the XLR connection is far away from the visual focus to minimize microphone visual element in the high quality HD/4K/8K image.

The same high performance as standard B9audio microphones can now be arrange in the clean pictures as well as its clean sound. Visual elements shall not compromise

audio quality, and audio elements shall not compromise video quality either.

In considering the on-site work load, BM was designed to keep minimum setup and dismantle works. Optional support EVA foam cutout for user to built their own carrying case to organize a number of pre-assemble BM booms together.

Any standard 3/8" thread base will work with the 12mm ROD with following length: 100/60/35/25/10cm. With 3/8" thread and bolt at the ends, the ROD can be connected together for form different length according the users' demands.

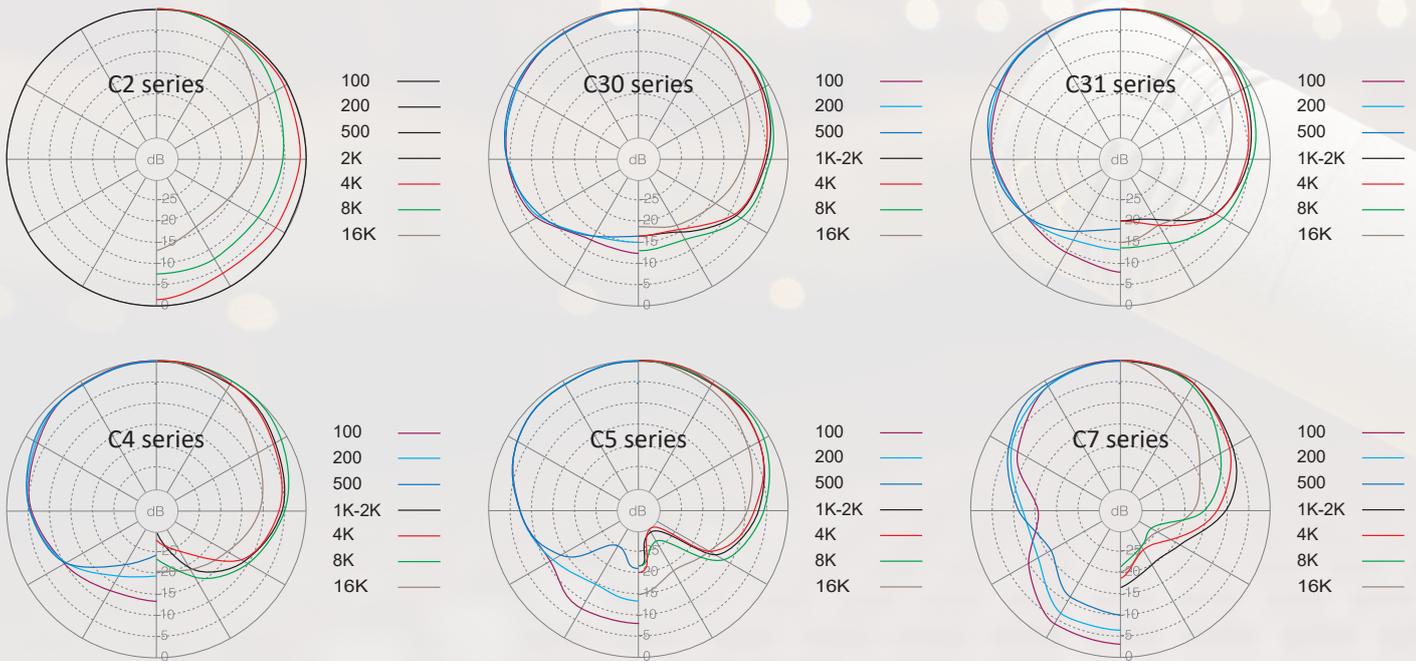

Exchangeable capsule

Built-in pre-amplifier

4 standard length:

- BM1200C, 120cm
- BM900C, 90cm
- BM700C, 70cm
- BM350C, 35cm

Clamp Uno,
for 1 BM boom
Clamp Duo,
for 2 BM boom

Various stand ROD with standard
3/8" thread

- ROD1000, 100cm
- ROD600, 60cm
- ROD350, 35cm
- ROD250, 25cm
- ROD100, 10cm

Standard XLR 3 pin plug

Various base or standard 3/8"
thread base. KSM 23220 shown
here:

- BASE120/1, 1kg, 12.5cm
round base
- BASE250/2, 2kg, 25cm round
base

