

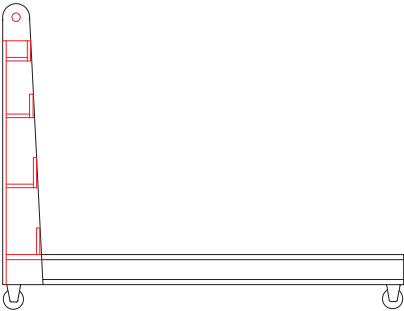



area, you can certainly glue the handle support assembly to the platform along with the screws. The only thing left now in the project is to apply some finish. I would recommend a good quality polyurethane.

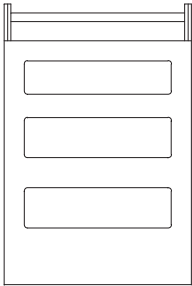

(5) Short ribs
3/4" Birch plywood

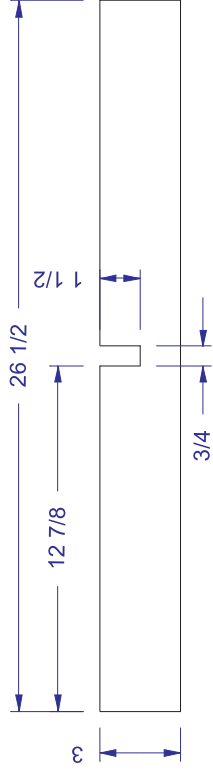


(3) Long ribs
3/4" Birch plywood

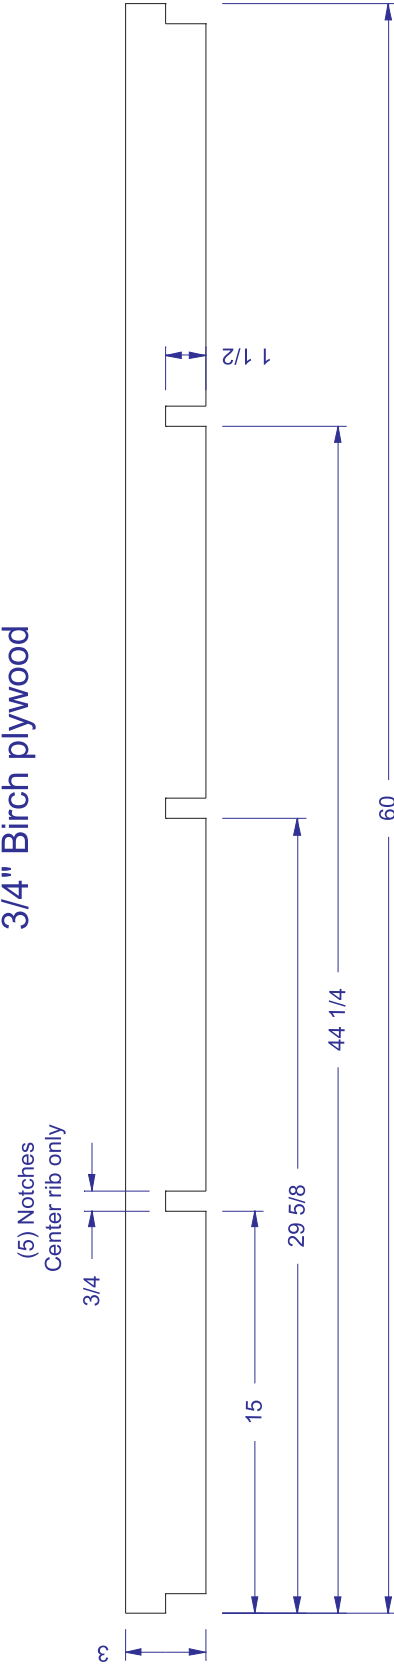



(5) Notches
Center rib only

(4) Caster mounting blocks
3/4" Birch plywood




- (4) 3" casters
- Either 4 swivel or 2 fixed (at rear) and 2 swivels at front
- (16) 5/16 x 1 1/2" lag bolts
- (16) 5/16" washers

Glue caster mounts to bottom skin (either inside or on bottom surface)

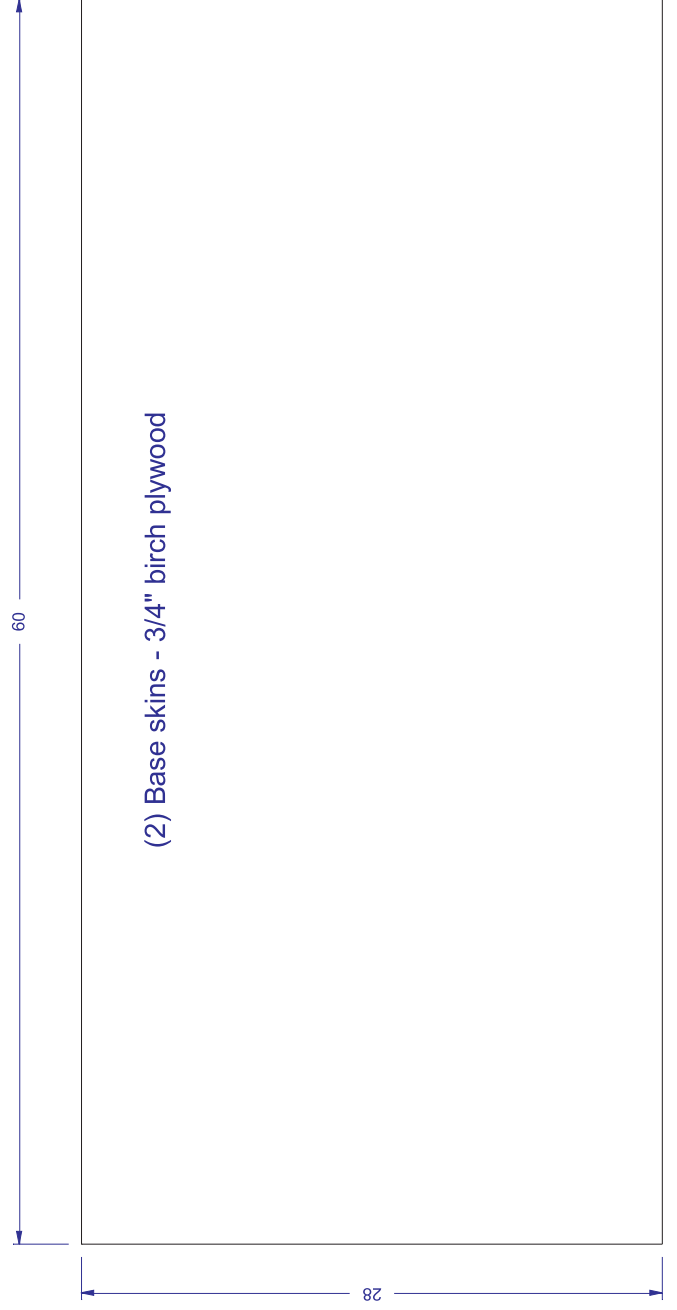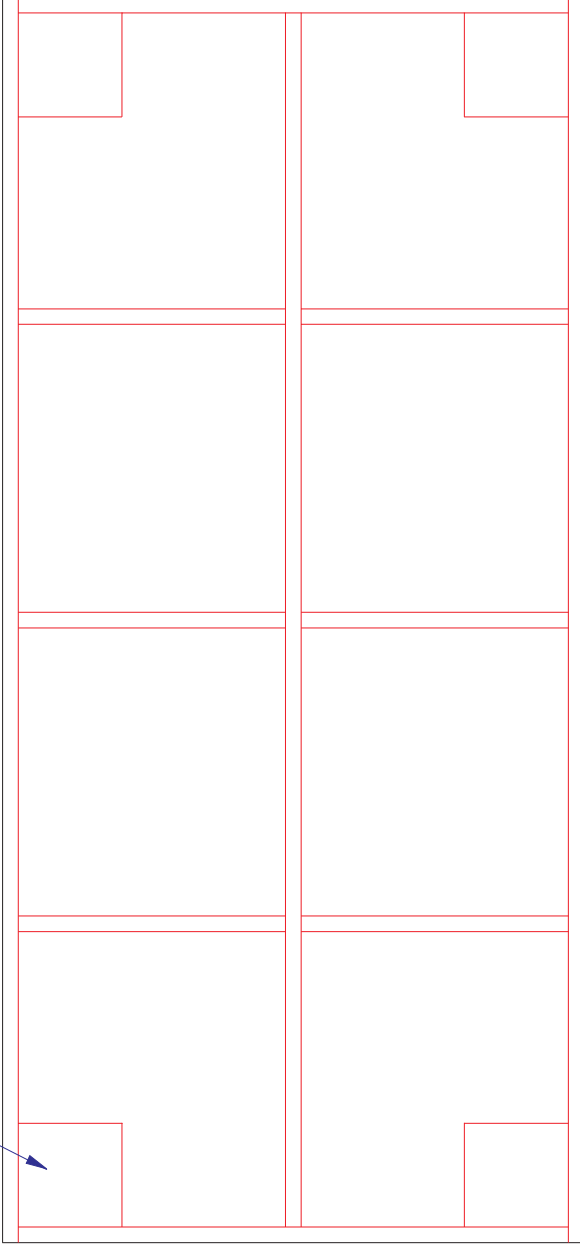


(2) Handle mounts
3/4" Birch plywood

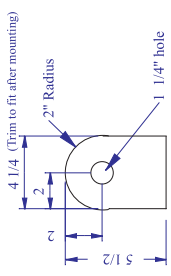


Use (3) #6 x 1 1/4" screws to fasten handle mounts to inside face of handle support side panels

(2) Handle support side panels
3/4" Birch plywood

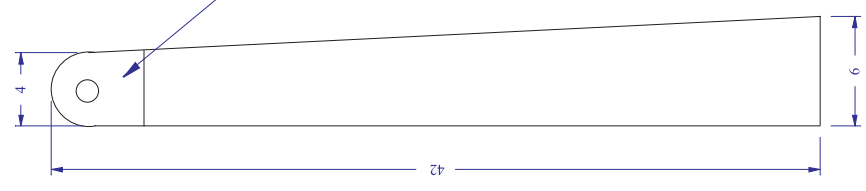


(1) Handle - 1 1/4" diameter oak dowel

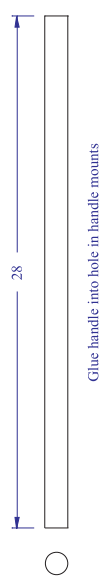


Glue handle into hole in handle mounts

(1) Handle support back panel
3/4" Birch plywood

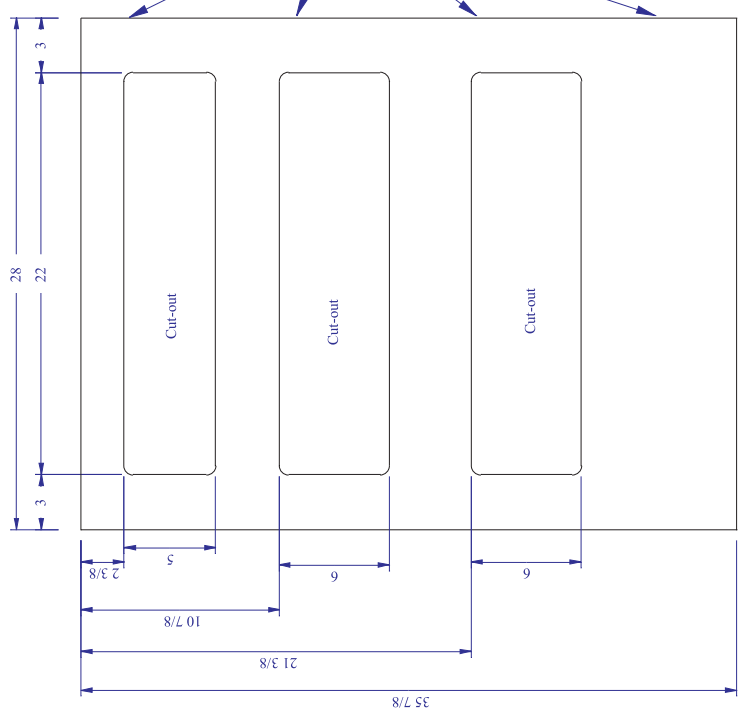

Join handle support side panels to handle support back panel using #10 biscuits spaced about 6 inches apart

4' x 8' 3/4" birch plywood

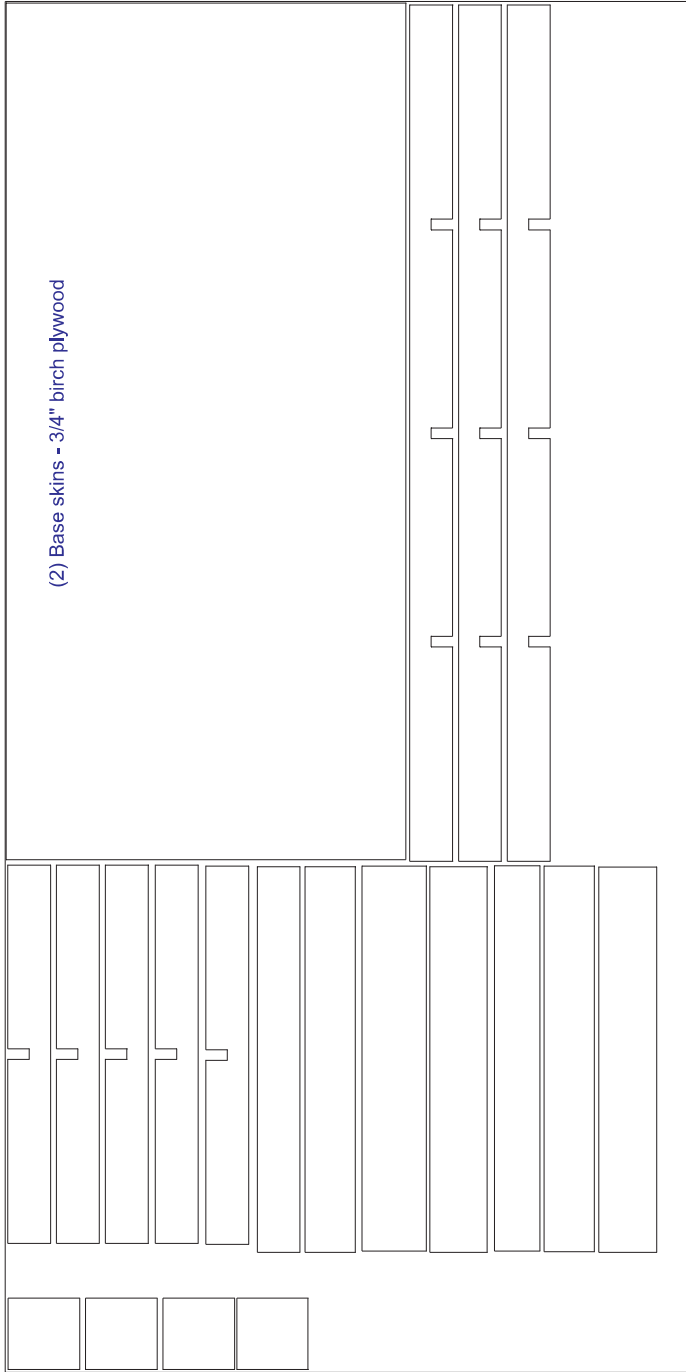

4' x 8' 3/4" birch plywood

