

Diaphragm Valve Type 514, 515, 517, 519



General

- **Size:** ½"–2"
- **Material:** PVC, CPVC, PROGEF® Standard® PP, PROGEF® Natural PPn, ABS, SYGEF® Standard PVDF, SYGEF® Plus PVDF-HP
- **Diaphragm:** EPDM, FPM, NBR, PTFE/EPDM, PTFE/FPM, PTFE-HP/EPDM, PTFE-HP/FPM
- **End Connection:** Solvent cement socket, threaded, flanged, fusion spigot union, fusion socket union, fusion spigot
- **Top Works:** Threaded connection to valve body
- **Position Indicator:** Integrated, graduated
- **Handle:** Lockable
- **Mounting:** Stainless steel inserts

Key Certifications

- **FDA CFR 21 177.1520:** PP and PVDF
- **FDA CFR 21 177.2600:** EPDM and FPM
- **FDA CFR 21 177.1550:** PTFE
- **USP 25 Class VI (physiological non-toxic):** PP and PVDF

Sample Specification

The 5-Series Diaphragm Valve family shall include the Type 514, 515, 517 and 519. The Type 514 body shall be true union. The Type 515 body shall be spigot. The Type 517 body shall be spigot and the end connection shall be flanged. The Type 519 body shall be lateral style spigot. All 5-Series Diaphragm Valves shall be bidirectional. The bonnet to body connection shall be threaded. The handle shall be lockable. The diaphragm material shall be indicated by a color specific insert. The stroke shall be indicated by a graduated indicator. Type 517 ANSI versions shall meet ANSI B16.5 150lb standards. All 5-Series Diaphragm Valves with PTFE diaphragms shall have a non-bonded elastomeric backing and utilize FPM face seals if required. All valves shall be tested in accordance to ISO9393 and designed to ISO16138 standards. All valves shall be manufactured under ISO9001 for Quality and ISO14001 for Environmental Management. Following assembly, every valve shall be tested and certified bubble tight exceeding Class VI standards.

Material Specification

PVC valves shall meet ASTM D1784 cell classification 12454 standards. CPVC valves shall meet ASTM D1784 cell classification 23447-B standards. PP valves shall meet ASTM D5847-14 cell classification PP0510B66851 standards. ABS valves shall meet ASTM D3965 cell classification 42222 standards. PVDF valves shall be type 1, grade 2 according to ASTM D3222 standards. Valves of all materials shall be RoHS compliant.

Definition of Valve Type




Type 514
True Union



Type 515
Spigot



Type 517
Flanged

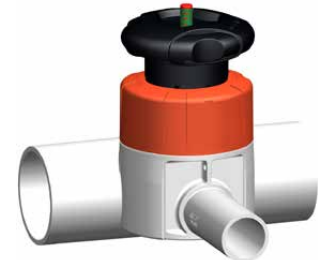

Type 519
Zero Static

Components



Valve Components

| Part | Description | Material |
|------|--------------------|---------------------------------|
| 1 | Valve body | PVC, CPVC, PP, PPn, or PVDF |
| 2 | Valve end | PVC, CPVC, PP, PPn, PE, or PVDF |
| 3 | Valve nut | PVC, CPVC, PP, PPn, or PVDF |
| 4 | Diaphragm | EPDM, FPM, NBR or PTFE |
| 5 | Diaphragm pin | Brass |
| 6 | Compressor | Glass-filled PP |
| 7 | Spindle | Brass/SS304 |
| 8 | Spindle housing | Glass-filled PP |
| 9 | Position indicator | Glass-filled PP |
| 10 | Bonnet nut | Glass-filled PP |
| 11 | Bonnet | Glass-filled PP |
| 12 | Handle | Glass-filled PP |
| 13 | Handle lock | Glass-filled PP |

Key Design Features

Threaded Bonnet

The 5-Series Diaphragm Valve utilizes several unique design features. The bonnet to valve body connection is threaded whereas a traditionally designed diaphragm valve utilizes metal body bolts. However when a valve is used in hot line applications, the components of the valve thermally expand and contract. The thermal expansion rate of metal is significantly less than plastics, meaning the metal body bolts of a traditionally designed diaphragm valve need to be retorqued after hot line shut downs. The bonnet to body mechanical connection of the 5-Series Diaphragm Valve is completely plastic, thus eliminating the need for retorquing.

The elimination of body bolts is ideal for applications in which corrosive chemicals are present in the atmosphere. Traditionally designed valves in these applications typically rely on exotic and expensive metal bolts to deter corrosion, when the body bolts are eliminated, this added cost is as well.



Key Design Features

True Zero Dead Leg

The Type 519 Diaphragm Valve is a truly revolutionary thermo-plastic zero static valve. The peak of the weir is molded nearly directly on the inner diameter of the main. This design virtually eliminates dead space when the branch port is closed.

Type 519 valves are available in PP, PPn and PVDF. Polypropylene versions are available in size ranges from d20xd20 to d63xd32 and PVDF versions are available in size ranges from d20xd20 to d110xd63.



Chemical Applications: Optional Features

Permeation Barrier


The 5-Series Diaphragm Valve utilizes several design features that are beneficial in chemical process applications. A commonly used diaphragm material in these applications is PTFE. All GF PTFE diaphragms are installed with a non-bonded elastomeric backing, either EPDM or FPM. The FPM backing is impregnated with approximately 15% PTFE. These diaphragms are available with all 5-Series Diaphragm Valve body materials. The backing material completely covers the PTFE diaphragm with the exception of the diaphragm pin.

One concern with diaphragm valves in chemical process applications is permeation. The 5-Series diaphragm is designed to protect against damage commonly caused by permeation. The FPM/PTFE backing provides a chemically resistant barrier to protect the mechanical components inside the bonnet. The backing protects nearly the entire PTFE diaphragm to provide maximum protection against component corrosion.



Bonnet Seal

Corrosive environments can be detrimental to valve components that are not exposed to media. This is addressed with the 5-Series Diaphragm Valve in the bonnet seals. The bonnet seal is available with all varieties of 5-Series Valves and utilizes three o-rings. One on the position indicator, one on the spindle housing and one on the bonnet nut. The combination of these o-rings seals the inner works of the valves from the atmosphere. The result of this is that there is no exposed metal to the atmosphere with the exception of the threaded mounting inserts on the base of the valve.

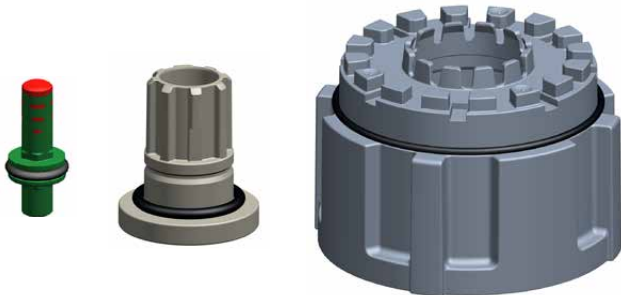


Technical Data


Pressure Temperature Curves

The following graphs are based on a 25 year lifetime water or similar media application


PVC

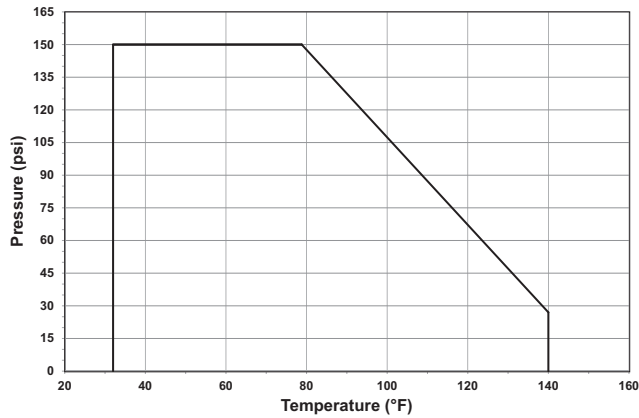


CPVC

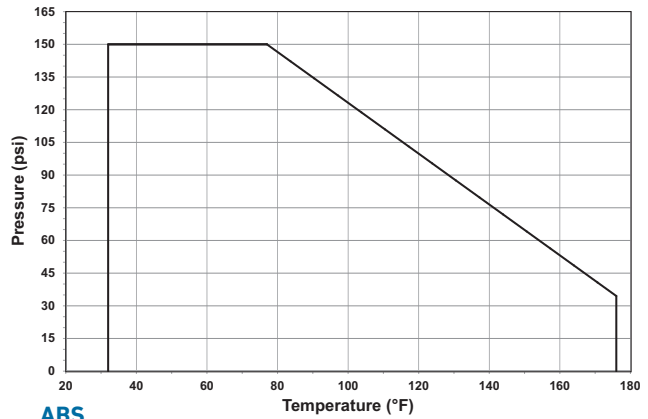


PP/PPn

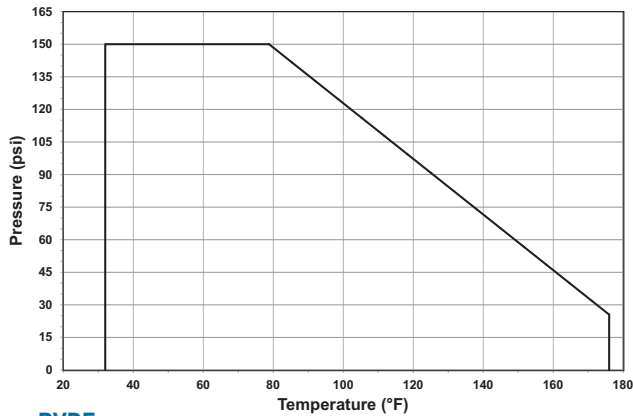

ABS

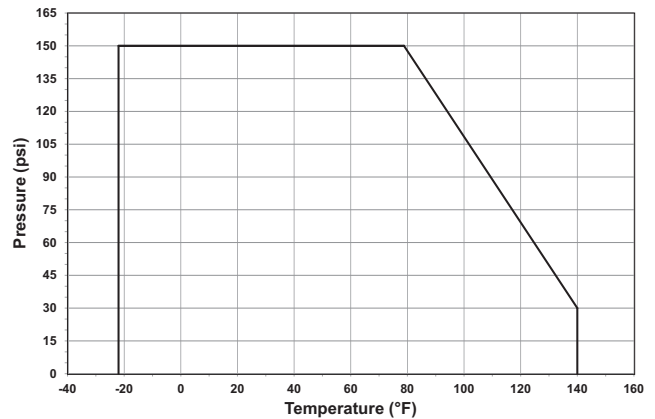

PVDF

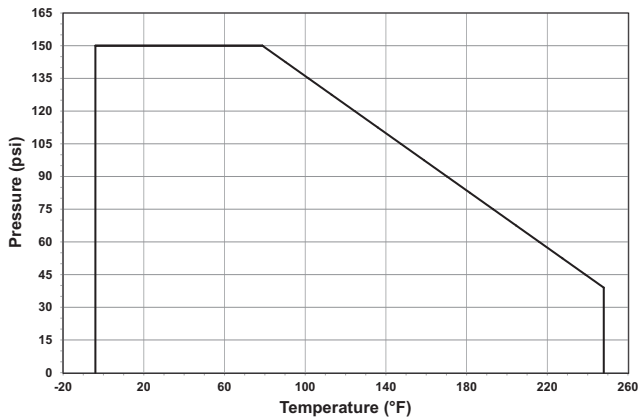

Pressure-Temperature

| Material | Temperature Range (°F) | Max Pressure (psi) |
|----------|------------------------|--------------------|
| PVC* | 32 to 140 | 150 |
| CPVC* | 32 to 176 | 150 |
| PP/PPn | 32 to 176 | 150 |
| ABS | -40 to 140 | 150 |
| PVDF* | -4 to 284 | 150 |

Vacuum Service

5-Series Diaphragm Valve with an elastomeric diaphragm are rated for full vacuum service, maximum differential pressure of 15psi at 122°F. 5-Series Diaphragm Valves with a PTFE diaphragm are not rated for full vacuum service, maximum differential pressure of 8.7psi at 122°F.

High Pressure Applications: Optional Feature


The 5-Series diaphragm valve is available with a glass-filled black PPS bonnet. This high-strength, rigid material increases the rated pressure to 232psi. It is available with PVC, CPVC and PVDF bodies with EPDM, FPM or PTFE diaphragms. GF recommends that all valves fitted with this bonnet be used in water applications only.




Flow

The following information is based on water applications at 68° F

Flow Characteristics Type 514–517

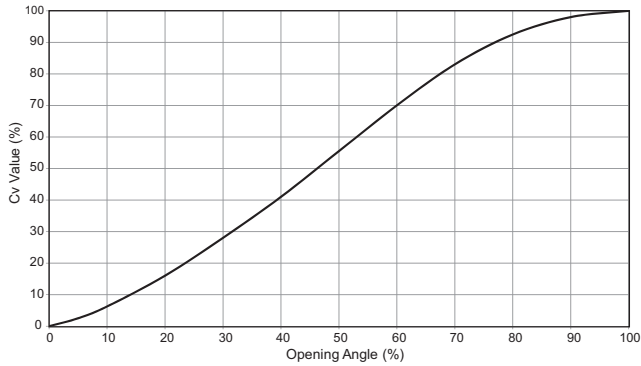


Flow Characteristics Type 519

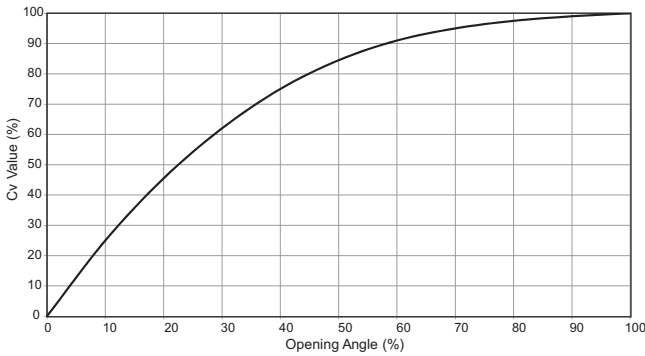

Key Design Features

Weir Design

The threaded bonnet design also eliminated the need for valve body bolt holes. This allowed GF engineers to decrease the grade of the weir and design a valve with an optimized flow path. This significantly increases the Cv value when comparing the 5-Series Valve to traditionally designed diaphragm valves.

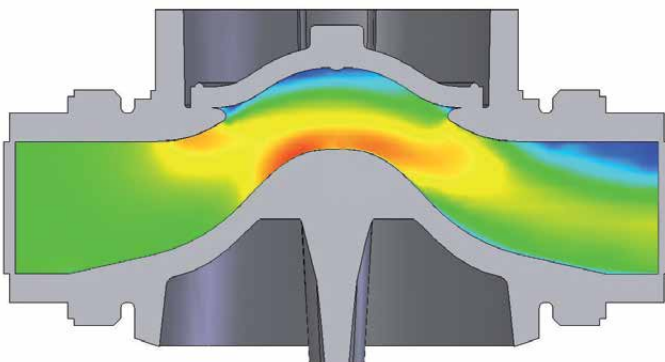

Cv Value Type 514-517





| Size (inch) | d (mm) | Cv (gal/min) |
|-------------|--------|--------------|
| 1/2 | 20 | 8.4 |
| 3/4 | 25 | 18.3 |
| 1 | 32 | 32.5 |
| 1 1/4 | 40 | 51.3 |
| 1 1/2 | 50 | 85.3 |
| 2 | 63 | 116.8 |

Cv Value Type 519

| Main (mm) | Branch (mm) | Cv (gal/min) |
|-----------|-------------|--------------|
| 20 | 20 | 3.9 |
| 25 | 20 | 6.0 |
| 25 | 25 | 8.0 |
| 32 | 20 | 5.4 |
| 32 | 25 | 7.1 |
| 32 | 32 | 15.6 |
| 40 | 20 | 5.7 |
| 40 | 25 | 8.0 |
| 40 | 32 | 10.3 |
| 40 | 40 | 12.6 |
| 50 | 20 | 5.8 |
| 50 | 25 | 10.8 |
| 50 | 32 | 13.9 |
| 50 | 40 | 35.4 |
| 50 | 50 | 45.1 |
| 63 | 20 | 5.7 |
| 63 | 25 | 10.1 |
| 63 | 32 | 12.4 |
| 63 | 40 | 31.8 |
| 63 | 50 | 41.2 |
| 63 | 63 | 50.5 |
| 90 | 20 | 5.7 |
| 90 | 25 | 7.2 |
| 90 | 32 | 9.0 |
| 90 | 50 | 43.6 |
| 90 | 63 | 48.7 |
| 110 | 20 | 5.5 |
| 110 | 25 | 7.2 |
| 110 | 32 | 9.2 |
| 110 | 50 | 42.3 |
| 110 | 63 | 46.3 |

Dimensions

The following tables are shown in millimeters unless otherwise specified

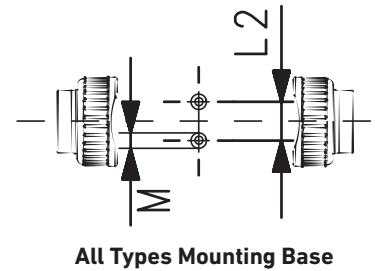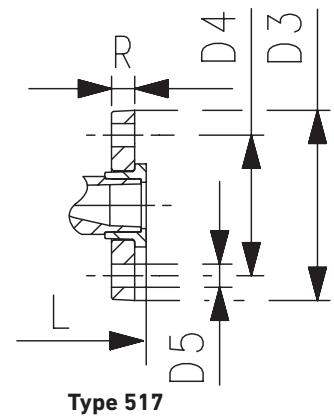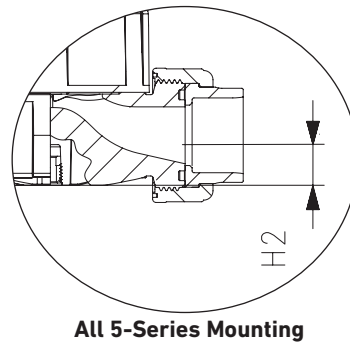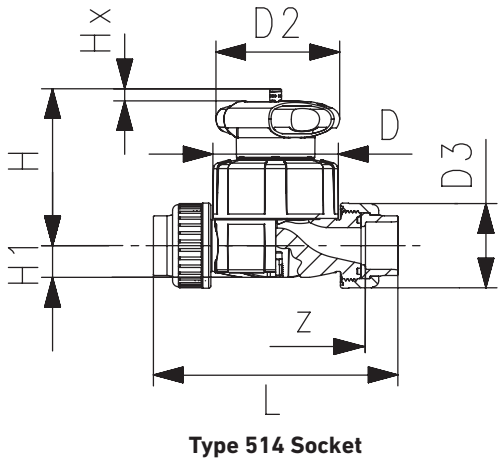

All Types

| Size (inch) | d (mm) | D | D2 | D3 | L2 | H | H1 | H2 | M | Hx |
|-------------|--------|-----|-----|-----|----|-----|----|----|----|----|
| 1/2 | 20 | 65 | 65 | 43 | 25 | 73 | 14 | 12 | M6 | 7 |
| 3/4 | 25 | 80 | 65 | 51 | 25 | 81 | 18 | 12 | M6 | 10 |
| 1 | 32 | 88 | 87 | 58 | 25 | 107 | 22 | 12 | M6 | 13 |
| 1 1/4 | 40 | 101 | 87 | 72 | 45 | 115 | 26 | 15 | M8 | 15 |
| 1 1/2 | 50 | 117 | 135 | 83 | 45 | 148 | 32 | 15 | M8 | 19 |
| 2 | 63 | 144 | 135 | 100 | 45 | 166 | 39 | 15 | M8 | 25 |

Type 514 PVC/CPVC

| Size (inch) | IPS Socket | | Threaded NPT | |
|-------------|------------|-----|--------------|-----|
| | L | z | L | z |
| 1/2 | 136 | 96 | 128 | 94 |
| 3/4 | 160 | 114 | 152 | 116 |
| 1 | 176 | 122 | 166 | 122 |
| 1 1/4 | 198 | 140 | 192 | 143 |
| 1 1/2 | 232 | 160 | 222 | 176 |
| 2 | 268 | 190 | 266 | 218 |

Type 517 PVC/CPVC

| Size (inch) | ANSI Flanged | | | | |
|-------------|--------------|-----------|-----------|-----------|----------|
| | L | D3 (inch) | D4 (inch) | D5 (inch) | R (inch) |
| 1/2 | 130 | 3.74 | 2.36 | 0.63 | 0.63 |
| 3/4 | 150 | 4.13 | 2.76 | 0.63 | 0.67 |
| 1 | 160 | 4.53 | 3.11 | 0.63 | 0.71 |
| 1 1/4 | 180 | 5.51 | 3.5 | 0.63 | 0.63 |
| 1 1/2 | 200 | 5.91 | 3.86 | 0.63 | 0.71 |
| 2 | 230 | 6.5 | 4.76 | 0.75 | 0.71 |

Type 514 ABS



| d(mm) | Metric Socket | |
|-------|---------------|-----|
| | L | z |
| 20 | 128 | 96 |
| 25 | 152 | 114 |
| 32 | 166 | 122 |
| 40 | 192 | 140 |
| 50 | 222 | 160 |
| 63 | 266 | 190 |

Type 517 ABS

| Size (inch) | ANSI Flanged | | | | |
|-------------|--------------|-----------|-----------|-----------|----------|
| | L | D3 (inch) | D4 (inch) | D5 (inch) | R (inch) |
| 1/2 | 130 | 3.74 | 2.36 | 0.63 | 0.63 |
| 3/4 | 150 | 4.13 | 2.76 | 0.63 | 0.67 |
| 1 | 160 | 4.53 | 3.11 | 0.63 | 0.71 |
| 1 1/4 | 180 | 5.51 | 3.5 | 0.63 | 0.63 |
| 1 1/2 | 200 | 5.91 | 3.86 | 0.63 | 0.71 |
| 2 | 230 | 6.5 | 4.76 | 0.75 | 0.71 |

Dimensions

The following tables are shown in millimeters unless otherwise specified

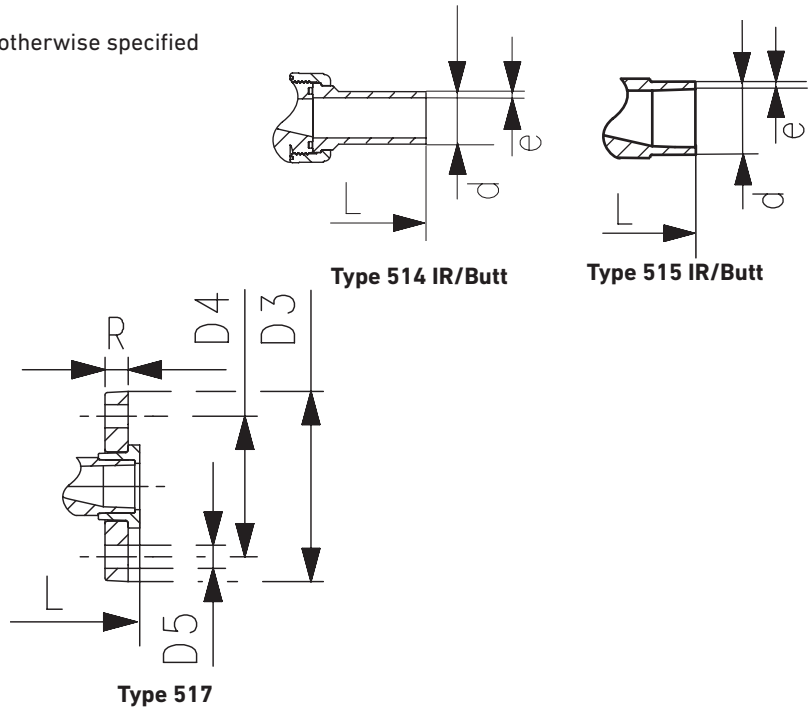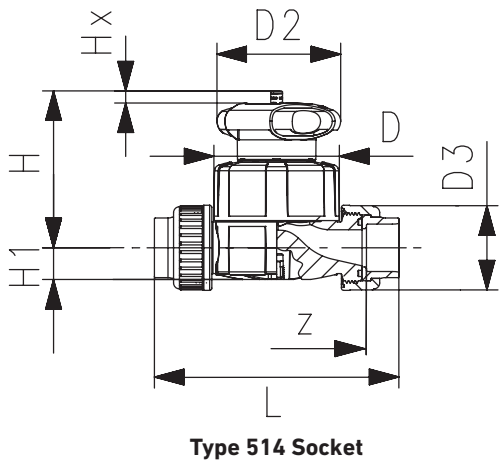

Type 514 PP

| d(mm) | Metric IR/Butt | | Metric Socket | | Threaded NPT | |
|-------|----------------|-----|---------------|-----|--------------|-----|
| | L | e | L | z | L | z |
| 20 | 196 | 1.9 | 128 | 100 | 132 | 98 |
| 25 | 221 | 2.3 | 150 | 118 | 154 | 118 |
| 32 | 234 | 2.9 | 162 | 126 | 172 | 128 |
| 40 | 260 | 3.7 | 184 | 144 | 196 | 148 |
| 50 | 284 | 4.6 | 210 | 164 | 222 | 176 |
| 63 | 321 | 5.8 | 248 | 194 | 266 | 218 |

Type 515 PP

| d(mm) | Metric IR/Butt | |
|-------|----------------|-----|
| | L | e |
| 20 | 124 | 1.9 |
| 25 | 144 | 2.3 |
| 32 | 155 | 2.9 |
| 40 | 176 | 3.7 |
| 50 | 193 | 4.6 |
| 63 | 223 | 5.8 |

Type 517 PP

| Size (inch) | ANSI Flanged | | | | |
|-------------|--------------|-----------|-----------|-----------|----------|
| | L | D3 (inch) | D4 (inch) | D5 (inch) | R (inch) |
| 1/2 | 130 | 3.74 | 2.36 | 0.63 | 0.63 |
| 3/4 | 150 | 4.13 | 2.76 | 0.63 | 0.67 |
| 1 | 160 | 4.53 | 3.11 | 0.63 | 0.71 |
| 1 1/4 | 180 | 5.51 | 3.5 | 0.63 | 0.63 |
| 1 1/2 | 200 | 5.91 | 3.86 | 0.63 | 0.71 |
| 2 | 230 | 6.5 | 4.76 | 0.75 | 0.71 |

Type 517 PVDF

| Size (inch) | ANSI Flanged | | | | |
|-------------|--------------|-----------|-----------|-----------|----------|
| | L | D3 (inch) | D4 (inch) | D5 (inch) | R (inch) |
| 1/2 | 130 | 3.74 | 2.36 | 0.63 | 0.63 |
| 3/4 | 150 | 4.13 | 2.76 | 0.63 | 0.67 |
| 1 | 160 | 4.53 | 3.11 | 0.63 | 0.71 |
| 1 1/4 | 180 | 5.51 | 3.5 | 0.63 | 0.63 |
| 1 1/2 | 200 | 5.91 | 3.86 | 0.63 | 0.71 |
| 2 | 230 | 6.5 | 4.76 | 0.75 | 0.71 |

Type 514 PVDF


| d(mm) | Metric IR/Butt | | Metric Socket | | Threaded NPT | |
|-------|----------------|-----|---------------|-----|--------------|-----|
| | L | e | L | z | L | z |
| 20 | 196 | 1.9 | 128 | 100 | 132 | 98 |
| 25 | 220 | 1.9 | 150 | 118 | 154 | 118 |
| 32 | 234 | 2.4 | 162 | 126 | 172 | 128 |
| 40 | 258 | 2.4 | 184 | 144 | 196 | 150 |
| 50 | 284 | 3.0 | 210 | 164 | 222 | 176 |
| 63 | 320 | 3.0 | 248 | 194 | 266 | 218 |

Type 515 PVDF

| d(mm) | Metric IR/Butt | |
|-------|----------------|-----|
| | L | e |
| 20 | 124 | 1.9 |
| 25 | 144 | 1.9 |
| 32 | 155 | 2.4 |
| 40 | 176 | 2.4 |
| 50 | 193 | 3.0 |
| 63 | 223 | 3.0 |

Dimensions

The following tables are shown in millimeters unless otherwise specified

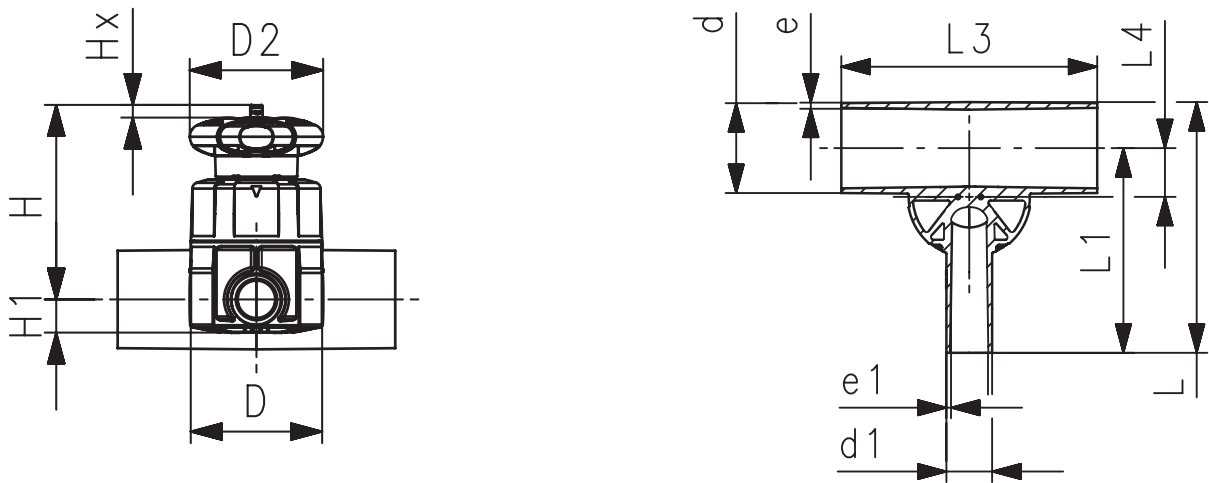

Type 519 Zero Static

| d-d1 (mm) | Valve (mm) | D | D2 | L | L1 | L3 | L4 | H | H1 | Hx | e PVDF | e1 PVDF | e PP/ PPn | e1 PP/ PPn |
|--------------|---------------|-----|-----|-----|-----|-----|----|-----|----|----|-----------|------------|-----------------|------------------|
| 20-20 | 20 | 65 | 65 | 117 | 96 | 162 | 12 | 75 | 14 | 7 | 1.9 | 1.9 | 1.9 | 1.9 |
| 25-20 | 25 | 80 | 65 | 133 | 108 | 162 | 16 | 80 | 18 | 10 | 1.9 | 1.9 | 2.3 | 1.9 |
| 25-25 | 25 | 80 | 65 | 133 | 108 | 162 | 16 | 80 | 18 | 10 | 1.9 | 1.9 | 2.3 | 2.3 |
| 32-20 | 25 | 80 | 65 | 142 | 120 | 162 | 19 | 84 | 22 | 10 | 2.4 | 1.9 | 2.9 | 1.9 |
| 32-25 | 25 | 80 | 65 | 142 | 120 | 162 | 19 | 84 | 22 | 10 | 2.4 | 1.9 | 2.9 | 2.3 |
| 32-32 | 32 | 88 | 87 | 145 | 120 | 160 | 19 | 107 | 22 | 13 | 2.4 | 2.4 | 2.9 | 2.9 |
| 40-20 | 32 | 88 | 87 | 149 | 128 | 180 | 23 | 115 | 22 | 13 | 2.4 | 1.9 | 3.7 | 1.9 |
| 40-25 | 32 | 88 | 87 | 149 | 128 | 180 | 23 | 115 | 22 | 13 | 2.4 | 1.9 | - | - |
| 40-32 | 32 | 88 | 87 | 149 | 128 | 180 | 23 | 115 | 22 | 13 | 2.4 | 2.4 | - | - |
| 40-40 | 32 | 88 | 87 | 174 | 153 | 180 | 23 | 115 | 22 | 13 | 2.4 | 2.4 | 3.7 | 3.7 |
| 50-20 | 25 | 80 | 65 | 160 | 134 | 180 | 27 | 97 | 18 | 10 | 3.0 | 1.9 | 4.6 | 1.9 |
| 50-25 | 32 | 88 | 87 | 160 | 134 | 180 | 28 | 120 | 22 | 13 | 3.0 | 1.9 | 4.6 | 2.3 |
| 50-32 | 32 | 88 | 87 | 160 | 134 | 180 | 28 | 120 | 22 | 13 | 3.0 | 2.4 | 4.6 | 2.9 |
| 50-40 | 63 | 144 | 135 | 209 | 169 | 209 | 33 | 164 | 32 | 25 | 3.0 | 2.4 | - | - |
| 50-50 | 63 | 144 | 135 | 209 | 169 | 209 | 33 | 164 | 32 | 25 | 3.0 | 3.0 | - | - |
| 63-20 | 25 | 80 | 65 | 177 | 144 | 180 | 33 | 104 | 18 | 10 | 3.0 | 1.9 | 5.8 | 1.9 |
| 63-25 | 32 | 88 | 87 | 177 | 144 | 180 | 35 | 127 | 22 | 13 | 3.0 | 1.9 | 5.8 | 2.3 |
| 63-32 | 32 | 88 | 87 | 177 | 144 | 180 | 35 | 127 | 22 | 13 | 3.0 | 2.4 | 5.8 | 2.9 |
| 63-40 | 63 | 144 | 135 | 225 | 192 | 220 | 39 | 170 | 39 | 25 | 3.0 | 2.4 | - | - |
| 63-50 | 63 | 144 | 135 | 225 | 192 | 220 | 39 | 170 | 39 | 25 | 3.0 | 3.0 | - | - |
| 63-63 | 63 | 144 | 135 | 225 | 192 | 220 | 39 | 170 | 39 | 25 | 3.0 | 3.0 | - | - |
| 90-20 | 32 | 88 | 87 | 205 | 159 | 190 | 47 | 140 | 22 | 13 | 4.3 | 1.9 | - | - |
| 90-25 | 32 | 88 | 87 | 205 | 159 | 190 | 47 | 140 | 22 | 13 | 4.3 | 1.9 | - | - |
| 90-32 | 32 | 88 | 87 | 205 | 159 | 190 | 47 | 140 | 22 | 13 | 4.3 | 2.4 | - | - |
| 90-50 | 63 | 144 | 135 | 254 | 207 | 250 | 51 | 184 | 39 | 25 | 4.3 | 3.0 | - | - |
| 90-63 | 63 | 144 | 135 | 254 | 207 | 250 | 51 | 184 | 39 | 25 | 4.3 | 3.0 | - | - |
| 110-20 | 32 | 88 | 87 | 227 | 171 | 190 | 56 | 149 | 22 | 13 | 5.3 | 1.9 | - | - |
| 110-25 | 32 | 88 | 87 | 227 | 171 | 190 | 56 | 149 | 22 | 13 | 5.3 | 1.9 | - | - |
| 110-32 | 32 | 88 | 87 | 227 | 171 | 190 | 56 | 149 | 22 | 13 | 5.3 | 2.4 | - | - |
| 110-50 | 63 | 144 | 135 | 276 | 219 | 250 | 60 | 194 | 39 | 25 | 5.3 | 3.0 | - | - |
| 110-63 | 63 | 144 | 135 | 276 | 219 | 250 | 60 | 194 | 39 | 25 | 5.3 | 3.0 | - | - |