


UXB Flow Rate



UXB Flow Rate

METRIC

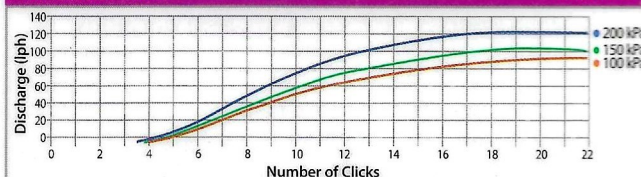


UXB Diameter of Throw



UXB Diameter of Throw

METRIC

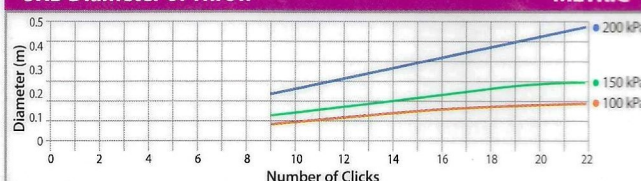

Xeri-Sprays™ and Misters

Ideal for Ground Cover, Mass Plantings, Annual Flower Beds, and Containers

Features


- Adjust flow/radius by turning integral ball valve
- Uniform emission pattern provides excellent distribution
- 10-32 self-tapping threads fit into ½" x 10-32 adapter (10-32A); 1800 Xeri-Bubbler™ adapter (XBA-1800); and PolyFlex Riser (PFR-12)

Operating Range


- Flow: 0 to 31 gph (0 to 117.34 l/h)
- Pressure: 10 to 30 psi (0.75 to 2.1 bar)
- Radius: 0 to 13.4 feet (0 to 4.1 m) full-circle; 0 to 10.6 feet (0 to 3.2 m) quarter- and half-circle

Models


- XS-090: Quarter-circle, spray
- XS-180: Half-circle, spray
- XS-360: Full-circle, stream spray
- X360 ADJMST: Full-circle, mist



XS-090



XS-180



XS-360



XS-090



XS-180



XS-360



X360 ADJMST

Xeri-Spray™ 360° True Spray

Ideal for Mass Plantings, Ground Cover, Annual Flower Beds and Containers

Features


- True micro-spray with full-circle fan spray pattern
- Adjust flow/radius by turning outer cap
- Three convenient installation connections for design flexibility: 10-32 self-tapping thread, ¼" barb and 5" spike
- Easily cleaned by completely unscrewing cap from base unit

Operating Range

- Flow: 0 to 24.5 gph (0 to 92.7 l/h)
- Pressure: 15 to 30 psi (1.0 to 2.1 bar)
- Radius: 0 to 6.7 feet (0 to 2.0 m)

Models

- XS-360TS: 10-32 threads
- XS-360TS-025: ¼" barb
- XS-360TS-SPYK: 5" spike; includes barb x barb coupler



XS-360TS



XS-360TS-025



XS-360TS



XS-360TS-SPYK

Xeri-Bubblers™

Ideal for Shrub Plantings, Trees, Containers, and Flower Beds

Features

- Adjust flow and radius by turning outer cap
- Clean by completely unscrewing cap from base unit
- Three convenient installation connections available for design flexibility: 10-32 self-tapping thread, 1/4" barb, and 5" spike


Operating Range

- SXB Series flow: 0 to 13 gph (0 to 49.21 l/h)
- UXB Series flow: 0 to 35 gph (0 to 132.48 l/h)
- Pressure: 15 to 30 psi (1.0 to 2.1 bar)


Models

- SXB-180-1032: Half-circle, 5 streams, 10-32 thread
- SXB-180-025: Half-circle, 5 streams, 1/4" barb
- SXB-180-SPYK: Half-circle, 5 streams, 5" spike; includes barb x barb coupler
- SXB-360-1032: Full-circle, 8 streams, 10-32 thread
- SXB-360-025: Full-circle, 8 streams, 1/4" barb
- SXB-360-SPYK: Full-circle, 8 streams, 5" spike includes barb x barb coupler
- UXB-360-1032: Full-circle, umbrella, 10-32 thread
- UXB-360-025: Full-circle, umbrella, 1/4" barb
- UXB-360-SPYK: Full-circle, umbrella, 5" spike includes barb x barb coupler



SXB Flow Rate 360° and 180°

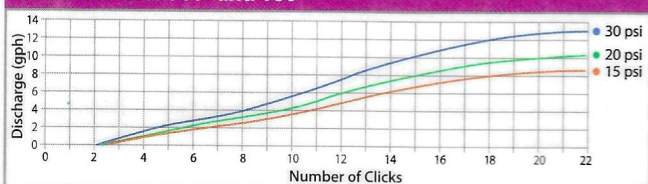


SXB Flow Rate 360° and 180°

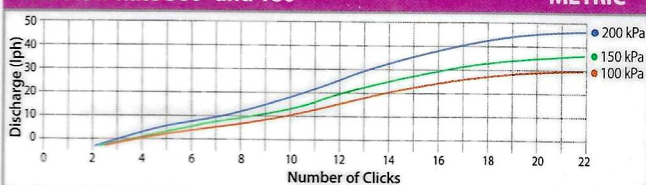


SXB Diameter of Throw 360°

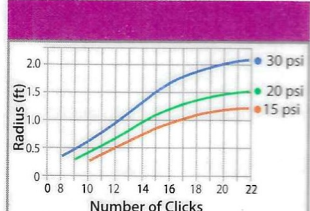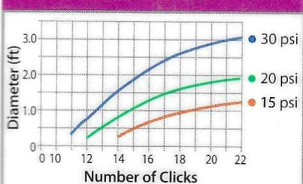

SXB Diameter of Throw 360° METRIC

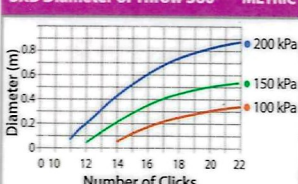

SXB Radius of Throw 180° METRIC

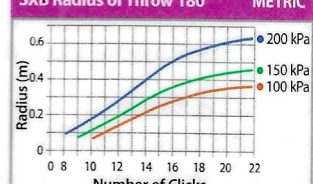

SXB-180



SXB-360



UXB-360



SXB-180



SXB-360



UXB-360



SXB-180-025



SXB-360-025



UXB-360-025

BARB



SXB-180-1032



SXB-360-1032



UXB-360-1032

10-32 threads



SXB-180-SPYK



SXB-360-SPYK



UXB-360-SPYK

"SPIKE"

How To Specify

SXB - 180 - 1032

Connection
1032: 10-32 self-tapping thread
025: 1/4" barb
SPYK: 5" spike

Pattern
180 = Half circle
360 = Full-circle

Model
SXB: Stream Bubbler
UXB: Umbrella Bubbler

Xeri-Sprays™ and Misters Performance


Pressure psi	Flow gph	XS-90 Radius of Throw ft.	XS-180 Radius of Throw ft.	XS-360 Radius of Throw ft.	360 Mister Radius of Throw ft.
10	0-16.7	0-6.4	0-6.7	0-9.2	0-1.5
15	0-21.0	0-8.1	0-8.1	0-11.3	0-1.3
20	0-24.5	0-9.4	0-9.5	0-12.9	0-1.5
25	0-28.0	0-9.8	0-10.1	0-13.2	0-1.4
30	0-31.0	0-10.3	0-10.6	0-13.4	0-1.3

Xeri-Sprays™ and Misters Performance

METRIC

Pressure bar	Flow l/h	XS-90 Radius of Throw m.	XS-180 Radius of Throw m.	XS-360 Radius of Throw m.	360 Mister Radius of Throw m.
0.7	0-63.21	0-2.0	0-2.0	0-2.8	0-0.46
1.0	0-79.49	0-2.5	0-2.5	0-3.4	0-0.40
1.4	0-92.73	0-2.9	0-2.9	0-3.9	0-0.44
1.7	0-105.98	0-3.0	0-3.1	0-4.0	0-0.43
2.1	0-117.34	0-3.1	0-3.2	0-4.1	0-0.40

Xeri-Spray 360° True Spray Flow Rate

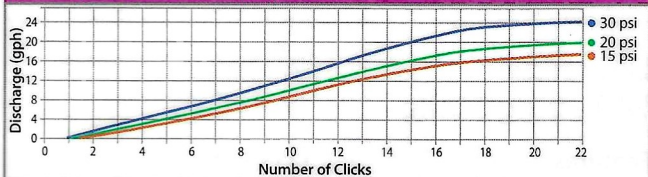


Xeri-Spray 360° True Spray Flow Rate

METRIC




Xeri-Spray 360° True Spray Diameter of Throw

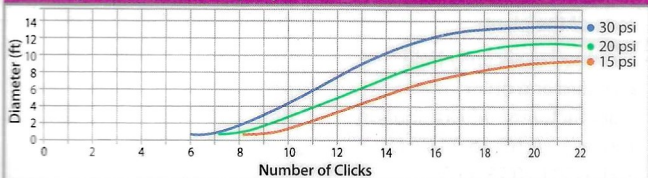

Xeri-Spray 360° True Spray Diameter of Throw

METRIC

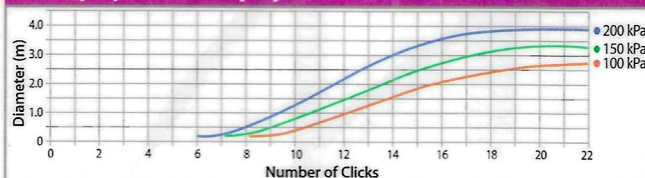

Landscape Drip