



1 2 3 4 5 6 7 8 9 10

LIFE SAFETY / EGRESS  
SYMBOL LEGEND

- 1-HOUR RATED WALL: SEE WALL TYPES
- ENCLOSED AREA
- UNDER STAIRS
- INDICATED EGRESS NUMBER
- EXIT SIGN - EMERGENCY: SEE ELECTRICAL DWGS.
- EMERGENCY LIGHTING: SEE ELECTRICAL DWGS.
- FIRE EXTINGUISHER (F.E.C. = FIRE EXTINGUISHER W/ CABINET)
- EGRESS WIDTH (INCHES) (EGRESS WIDTH / 0.2) (EXIT CAPACITY OCCUPANTS)
- EXIT DOOR (34" 169) (EGRESS WIDTH / 0.2) (EXIT CAPACITY OCCUPANTS)
- DOOR FIRE RATING (MINUTES)
- DESIGNED LOAD (OCCUPANTS)
- NR
- FS: SEE ELECTRICAL DWGS. FLOW SWITCH.
- TS: SEE ELECTRICAL DWGS. TAMPER SWITCH.
- H: SEE ELECTRICAL DWGS. HEAT DETECTOR.
- S: SEE ELECTRICAL DWGS. SMOKE DETECTOR.
- FDC: SEE PLUMBING DWGS. FIRE DEPARTMENT CONNECTION.
- FAOP: SEE ELECTRICAL DWGS. FIRE ALARM CONTROL PANEL.
- FAA: SEE ELECTRICAL DWGS. REMOTE ANNUNCIATOR.
- F: SEE ELECTRICAL DWGS. PULL STATION.
- HORN & STROBE: SEE ELECTRICAL DWGS.
- STROBE: SEE ELECTRICAL DWGS.

NR	34" 169
6	


EXIT DOOR

NR	5
34" 169	

EXIT DOOR

NR	5
34" 169	

EXIT DOOR






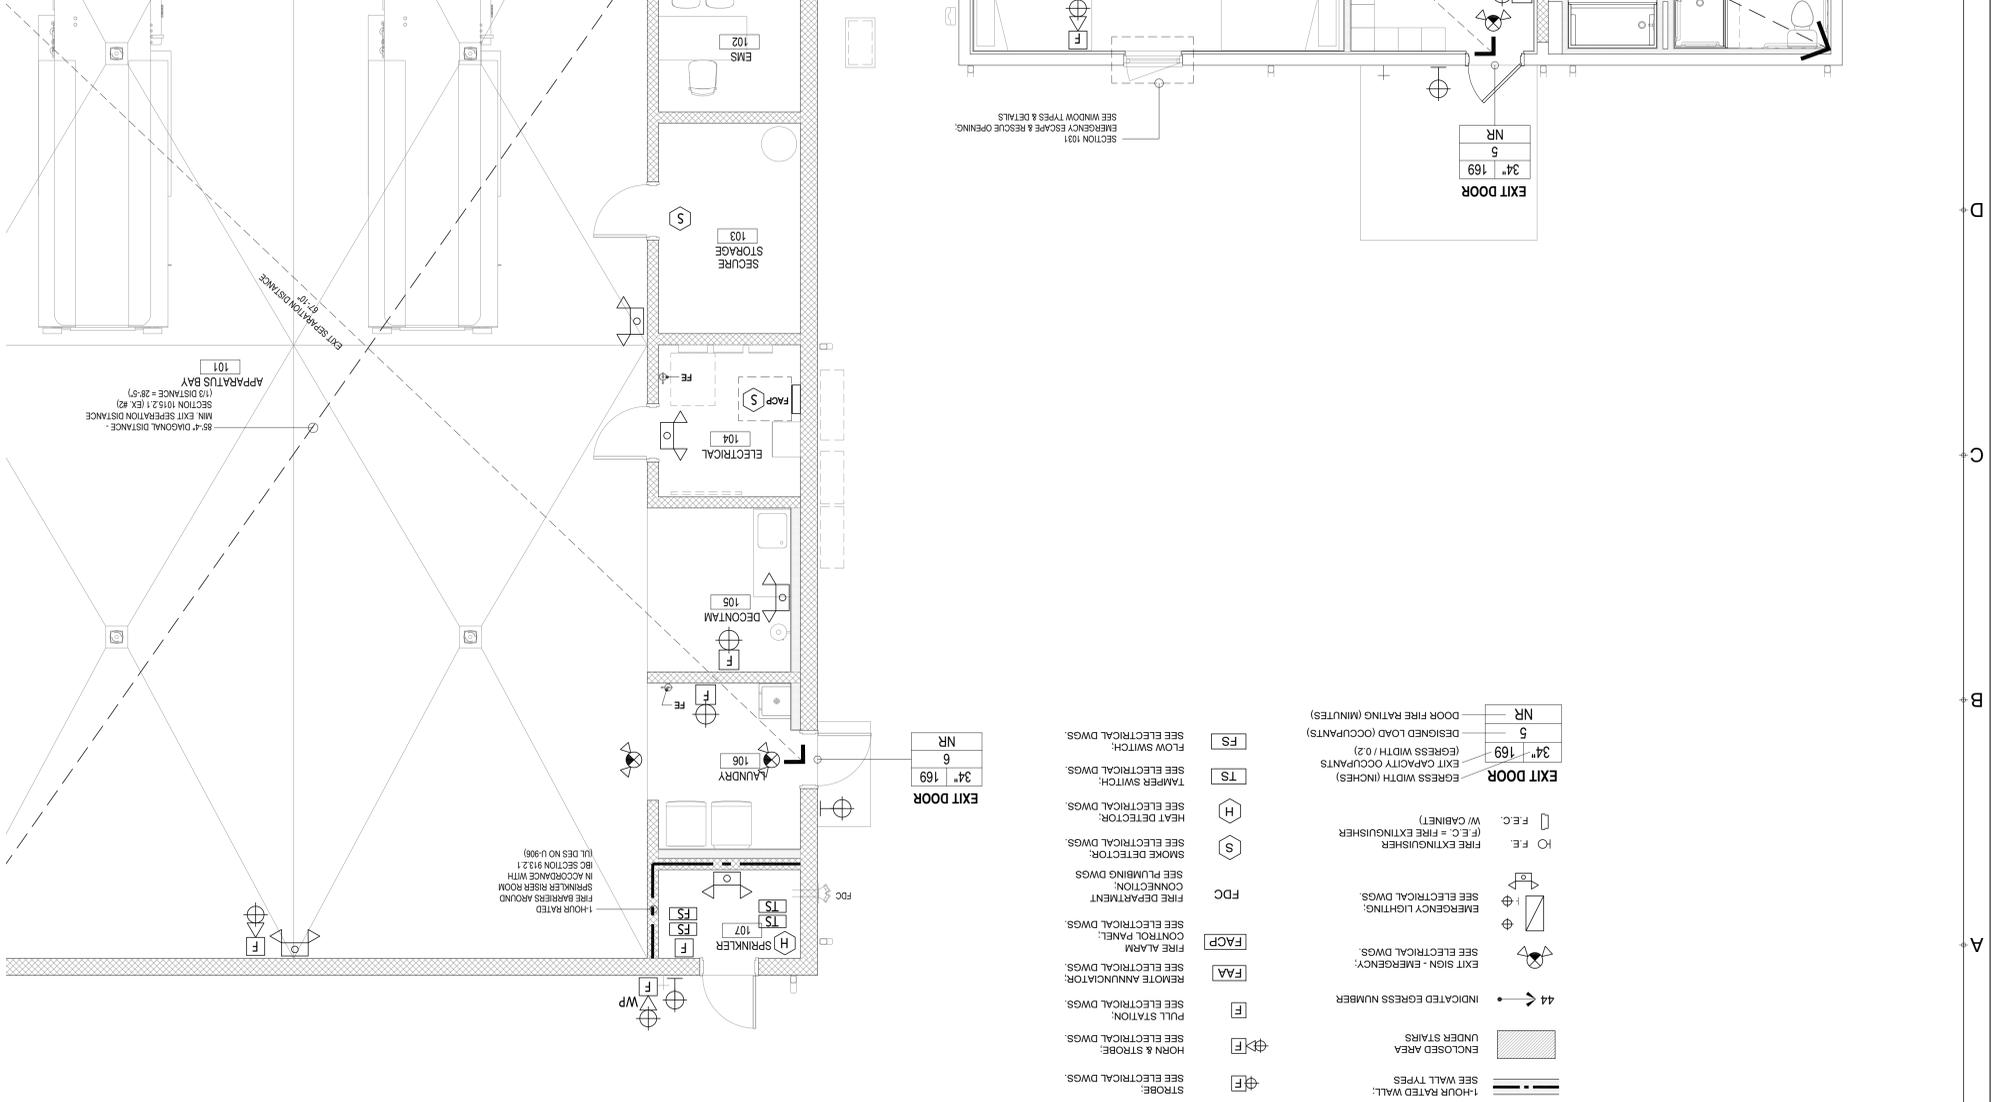


APPARATUS BAY (101)  
MIN. EXIT SEPARATION DISTANCE - 35'-4" DIAGONAL DISTANCE  
SECTION 101 & 2 (EX. 42)  
110 DISTANCE = 28'-5"

1-HOUR RATED FIRE BARRIERS AROUND SPRINKLER ROOM IN ACCORDANCE WITH IBC SECTION 913.2.1 (UL DES. NO. 906)

SECTION 101  
EMERGENCY ESCAPE & RESCUE OPENING. SEE WINDOW TYPES & DETAILS.



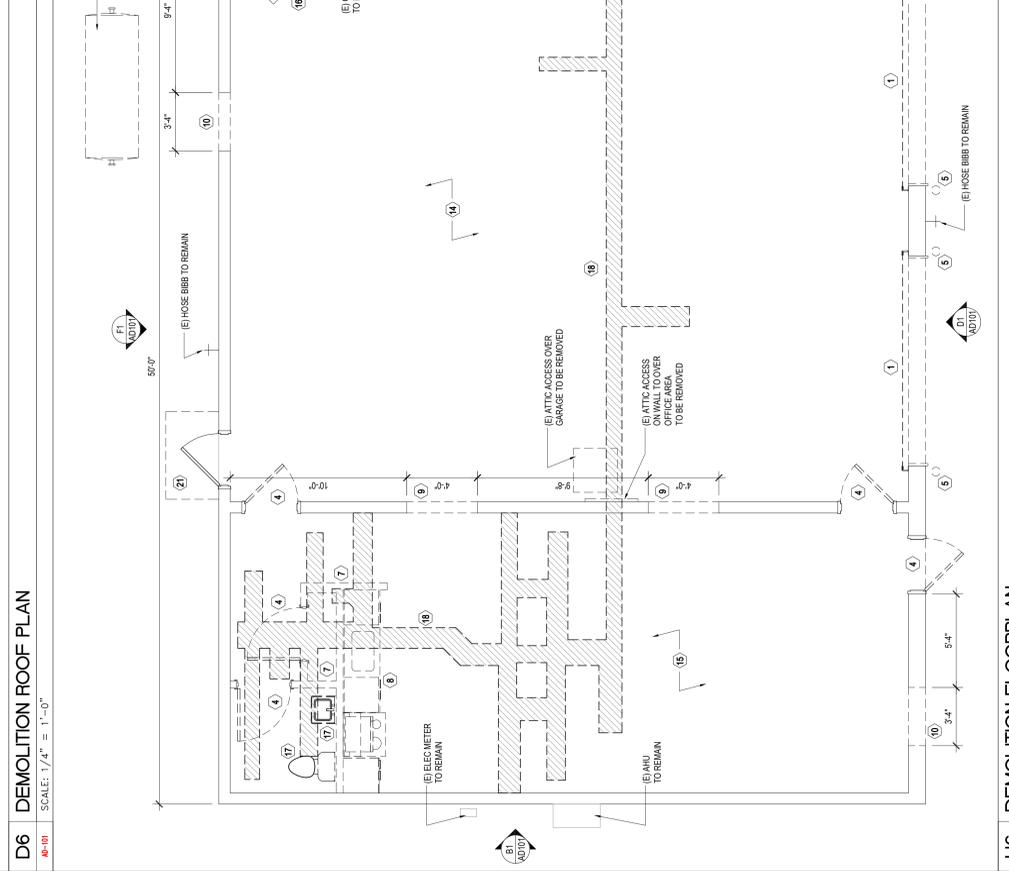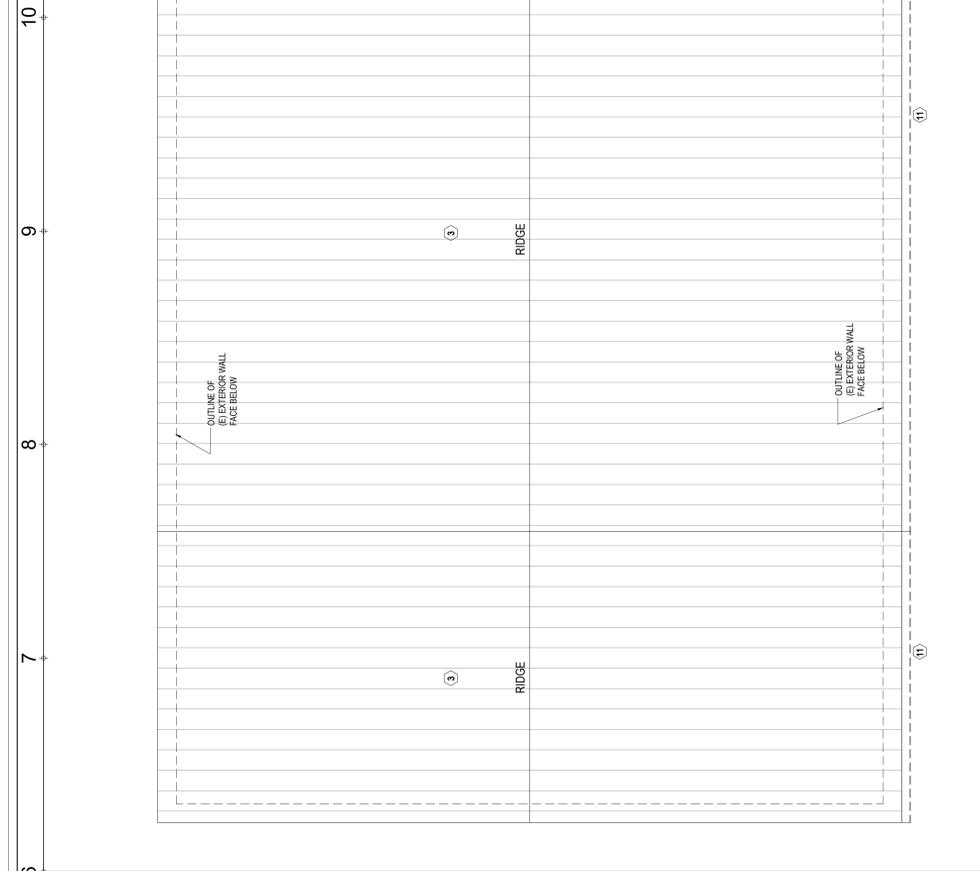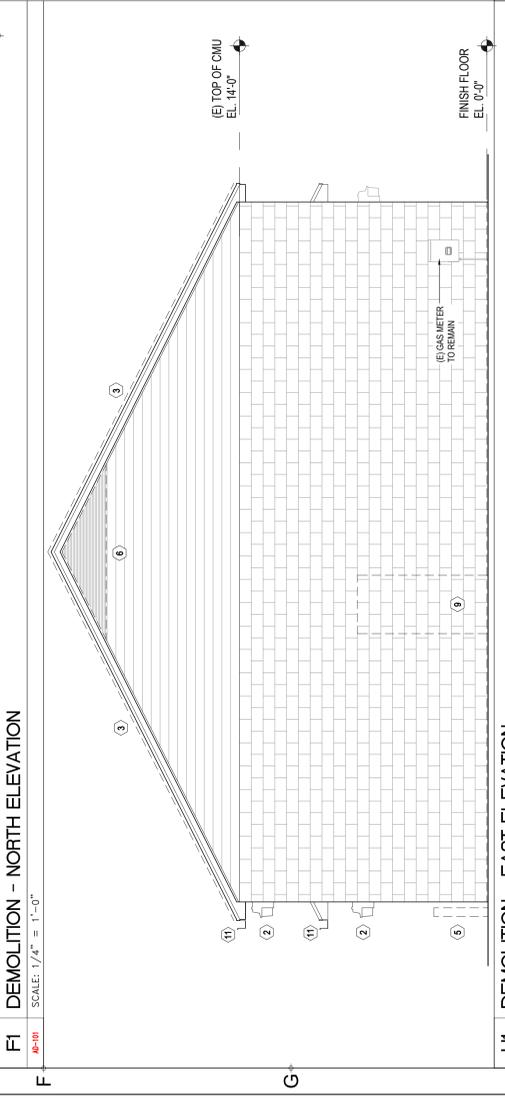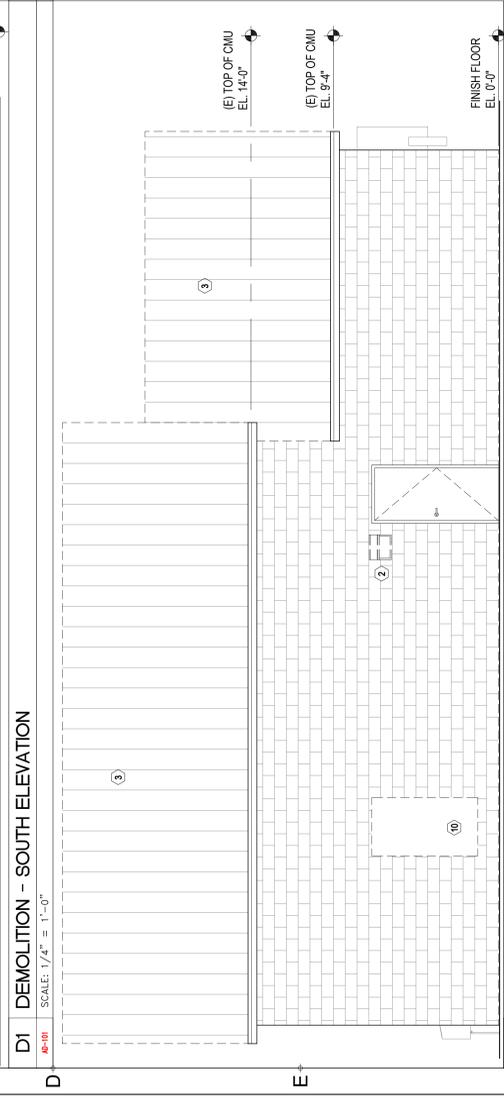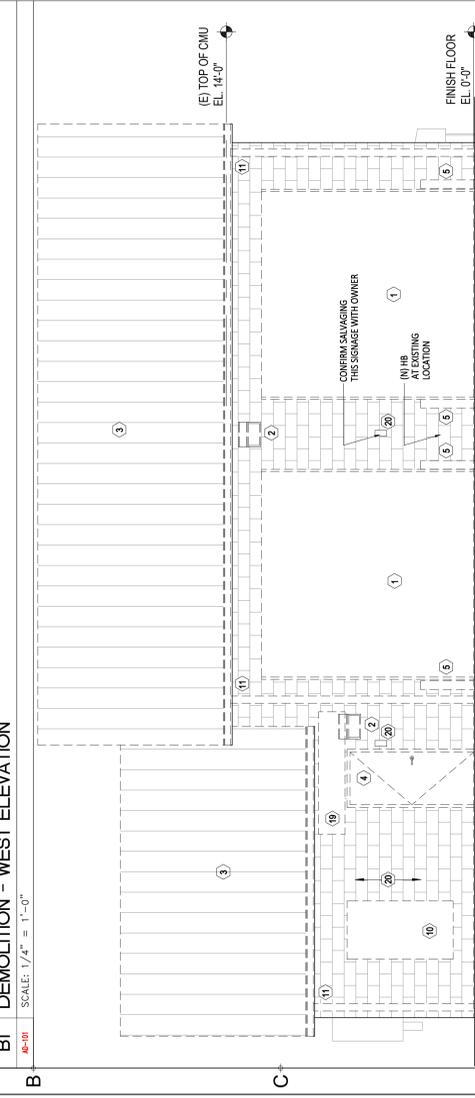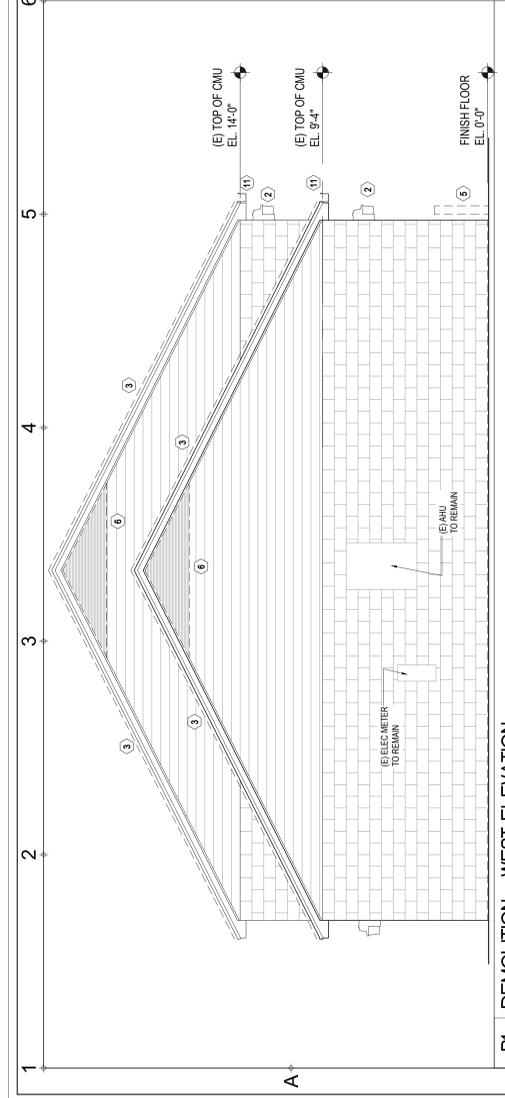



APPROVED  
By Tom Keller at 2:04 pm, Apr 15, 2024



APPROVED  
By Timothy Fox at 7:46 am, May 24, 2024





APPROVED  
By Barfeim at 8:32 am, May 21, 2024

SHEET NUMBER	SHEET TITLE
C-1	COVER
C-2	LEGEND
C-3	NOTES
C-4	RENOVALS & SFC PLAN
C-5	SITE PLAN
C-6	UTILITY PLAN
C-7	GRADING & DRAINAGE PLAN
C-8	LANDSCAPE PLAN
C-9	DETAILS
C-10	ESC DETAILS
C-11	SCOOT DETAILS
C-12	GSMVA DETAILS
C-13	SEPTIC DETAILS
C-14	SCOOT EXHIBIT

# CONSTRUCTION PLANS FOR GORETOWN FIRE STATION

INCLUDES SITE PLAN, GRADING & DRAINAGE,  
EROSION & SEDIMENT CONTROL, AND DETAILS.


Approved Job Site Plan Set Case # 64157

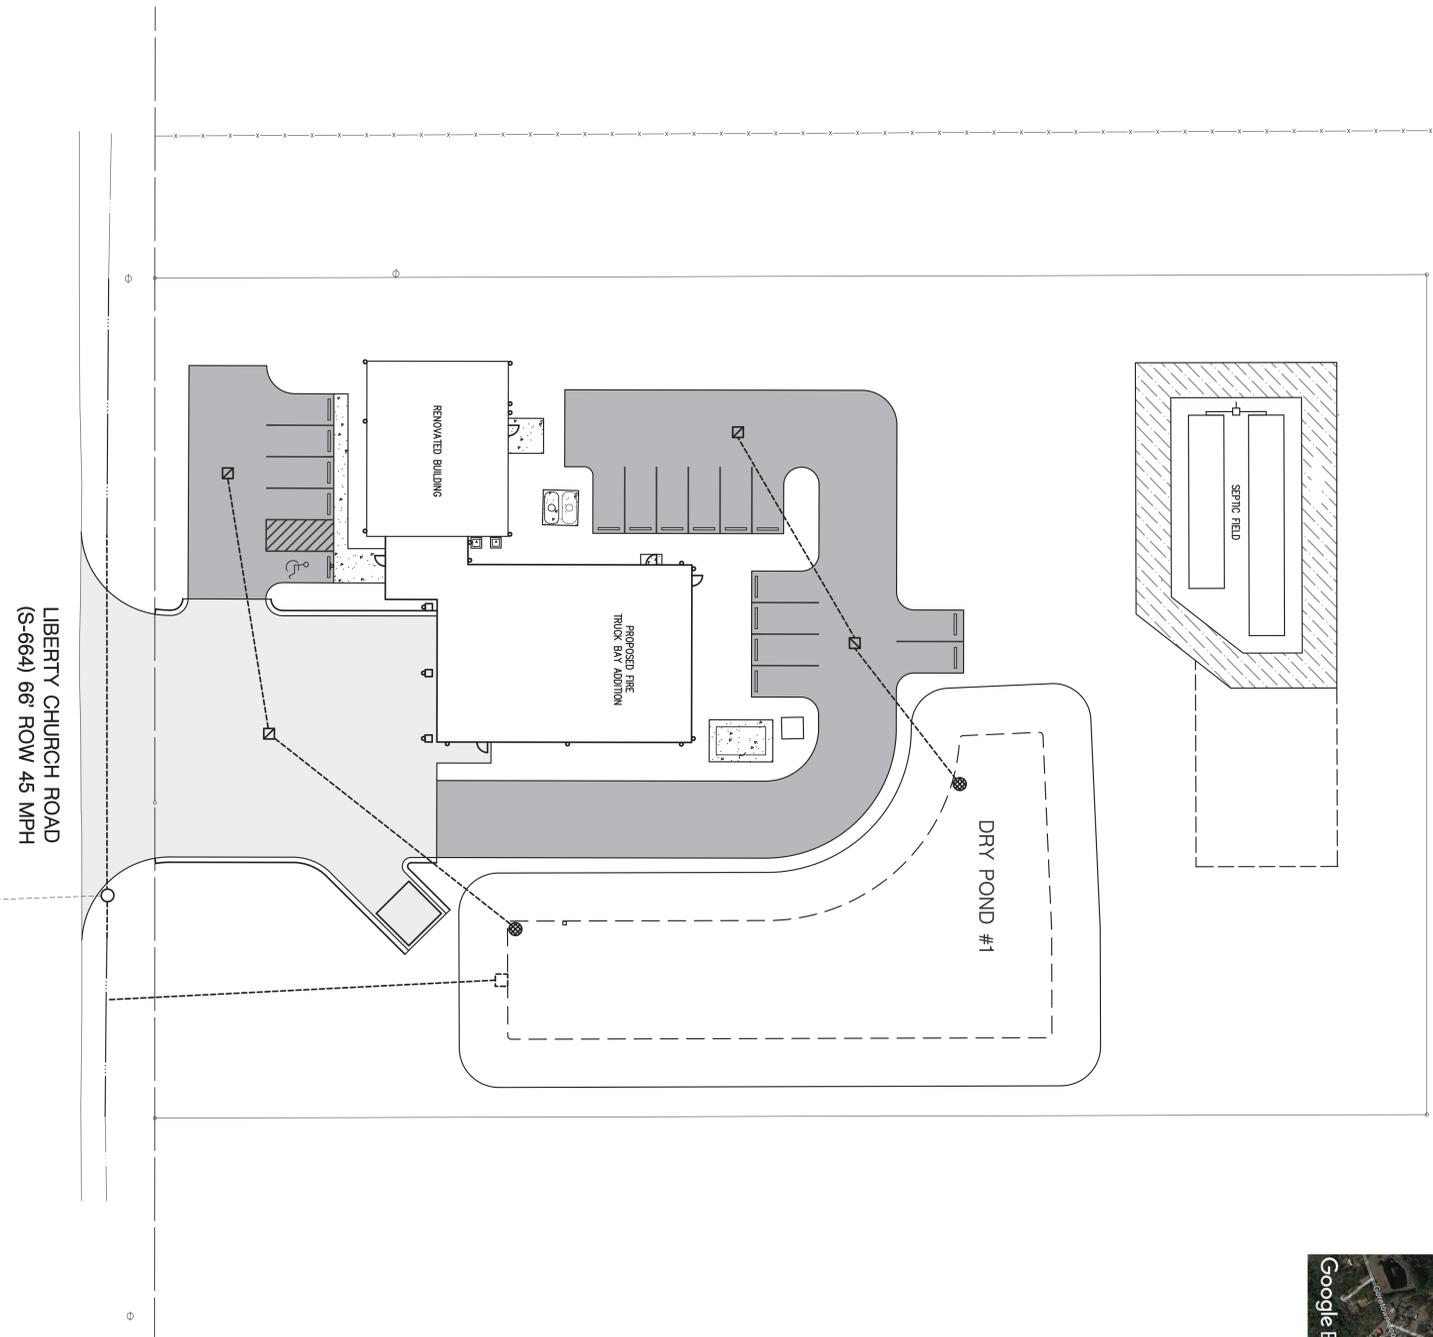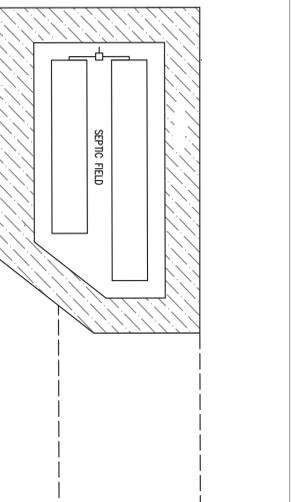

OVERALL SITE PLAN  
NOT TO SCALE





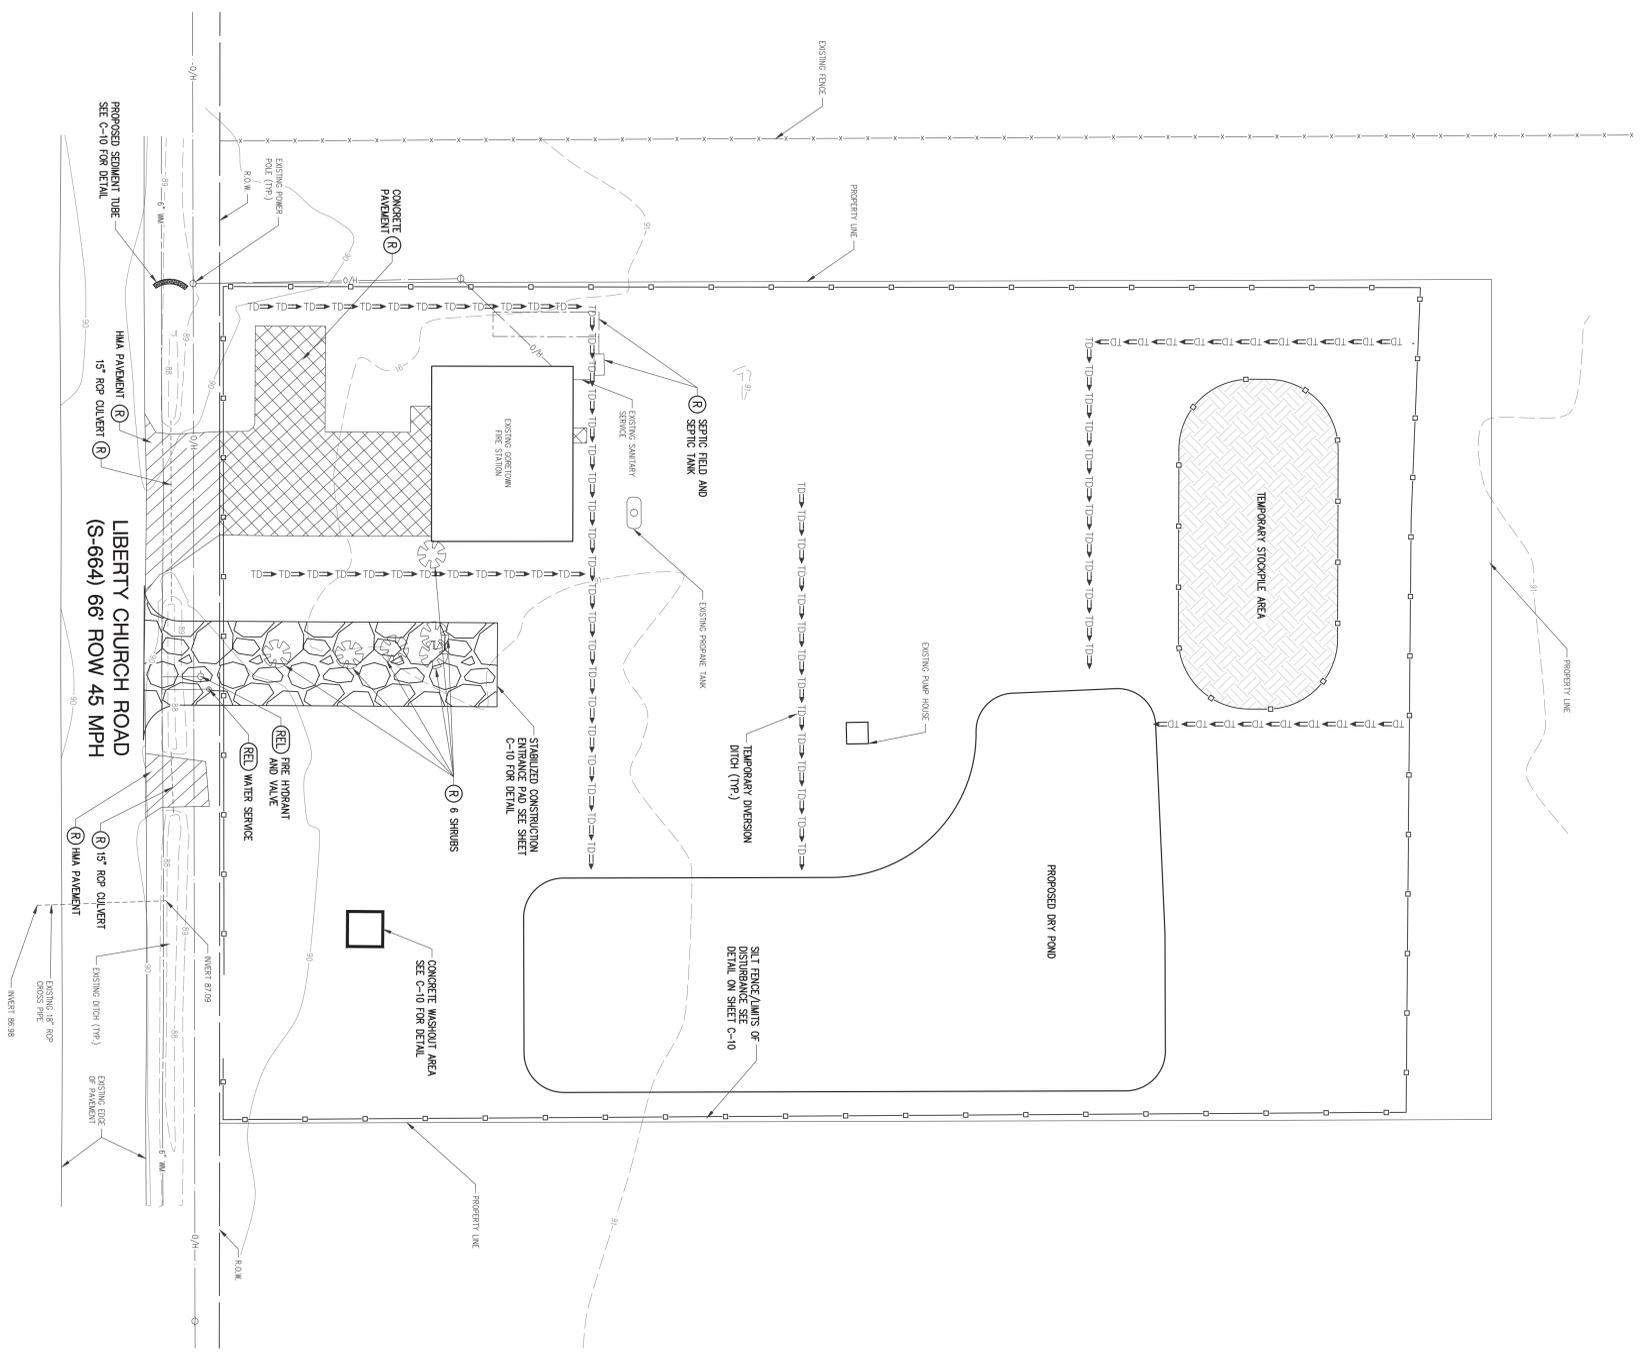



Horry County - Goretown Road  
 Address: Liberty Church Road, Loris  
 PIN: 18412030002  
 County: Horry County  
 System Specifications:  
 System Type ..... 6" Approved Aggregate  
 Total Linear Footage ..... 113'  
 Trench Width ..... 10' Wide (120 Inches)  
 Trench Depth ..... 6" Below Natural Grade  
 Septic Tank ..... 1000 gallon Two-Compartment Tank  
 Max. Daily Flow ..... 500 gpd \*  
 LTAR ..... 0.8 gpd/ft<sup>2</sup>  
 Zone of Seasonal Saturation ..... 12" Below Grade  
 Water Source ..... Public Water  
 Depth of Fill ..... 12" ABOVE Natural Grade  
 Pump Sizing Specifications ..... 15 ft of Head @ 10 gpm  
 Pump Basin ..... 500 gallon min.


1. Septic system installer must have on-site conference with Engineer or engineer representative BEFORE to installation or construction.
  2. Septic tanks must be an approved Two Compartment, 1000 gallon tank with inlet and outlet tee. Pump Chamber should be as large as possible (500 gallon Minimum) and sewage effluent pump must be sized, installed and maintained in compliance with DHEC Regulation 61-56 and all other applicable codes. (plumbing, electrical and any that apply)
  3. Lines to be installed at level grade with a minimum of 6" separation between the trench bottom and the Zone of Saturation (12"). Reserved Repair Area should remain undisturbed, without alteration and free of permanent structures. All septic system repairs must be done on equal or higher elevation than original septic system installation as shown on this site plan.
  4. The septic tank and fill cap area shall be backfilled and shaped to promote the runoff of surface water. Where natural surface drainage does not exist, a swale shall be constructed adjacent to the filled area to divert surface water away from the onsite wastewater system to a positive out fall. The installation of ditches, curtain drains, and rain gutters may be required to intercept and divert water away from the onsite wastewater system location.
- This individual Sewage Treatment Disposal System design meets the requirements of SC Regulation 61-56. It is not located in jurisdictional wetlands or within 125' of a Critical Area or Tidal Waters. The engineer is responsible for supervising the construction of the system and providing SCDHEC with a certified "as built" plan of the installation. For systems that have mechanical components and/or require a higher degree of maintenance to ensure the proper treatment and disposal of Domestic Wastewater, this operation and maintenance (O&M) plan, developed by the designing PE, must be given to the party who is ultimately responsible for the operation of the system. O&M plans must be recorded along with the property deed and must run with the land.
- \*System sizing is based on the highest usage (gallons per day) for a comparable 24 hour manned fire station in Horry County on the same municipal water system over a one year period.

**System Calculations**  
 500 gpd  
 0.8 gpd/ft<sup>2</sup> (LTAR) = 625 ft<sup>2</sup> (conventional)  
 625 ft<sup>2</sup> (conventional bottom area)/3 = 208 ft<sup>2</sup>  
 208 ft x 0.54 (reduction for 10 ft wide Trench) = 113 lin. ft


This Septic Design is for Domestic Wastewater/  
 Sewage Discharge Only. No other discharge  
 is permitted into the septic system.

- Operation and Maintenance Requirements for Specialized Septic Systems:
1. No Parking or heavy equipment will be allowed over the disposal field. This can result in damage to the system.
  2. Septic tank to be inspected annually for solids and pumped when solids exceed 30% of the tank volume (min. every 4 years).
  3. Final landscaping and perpetual maintenance should not remove any fill in the septic area. Final yard landscaping should divert all surface water away from septic system area
  4. Reserved Repair Area should remain free from any permanent structures or items.
  5. Gutters and gutter downspouts should be installed to divert runoff away from septic system.
  6. Irrigation is NOT recommended in the septic system area.
  7. Care, maintenance, proper use, protection of the septic system and any repairs that may be required at any time are the sole responsibility of the property owner.
  8. Please review all maintenance and operation tips on the SCDES webpage

SITE LUMINAIRE SCHEDULE							
CALLOUT	DESCRIPTION	MOUNTING	MODEL	TOTAL VA	FIXTURE WATTS	VOLTS	NOTE 1
SL1	POLE LIGHT	20' POLE PROVIDE LPI SERIES LPI-4C-20-1	NOCTURA SERIES NTA-A-NM-T3-TYPE B-19L-40K-UL-120-277V-BZ	130	130	120V 1P 2W	
SL2	AREA LIGHT	20' POLE PROVIDE LPI SERIES LPI-4C-20-1	NOCTURA SERIES NTA-A-NM-T4-TYPE B-19L-40K-UL-120-277V-BZ	130	130	120V 1P 2W	
SL3	NARROW FLOOD	KNURLE PROVIDE CONC. BASE & PIPE	C-LITE C-FLR0N5L40K08	40	40	120V 1P 2W	AM AT FLAG

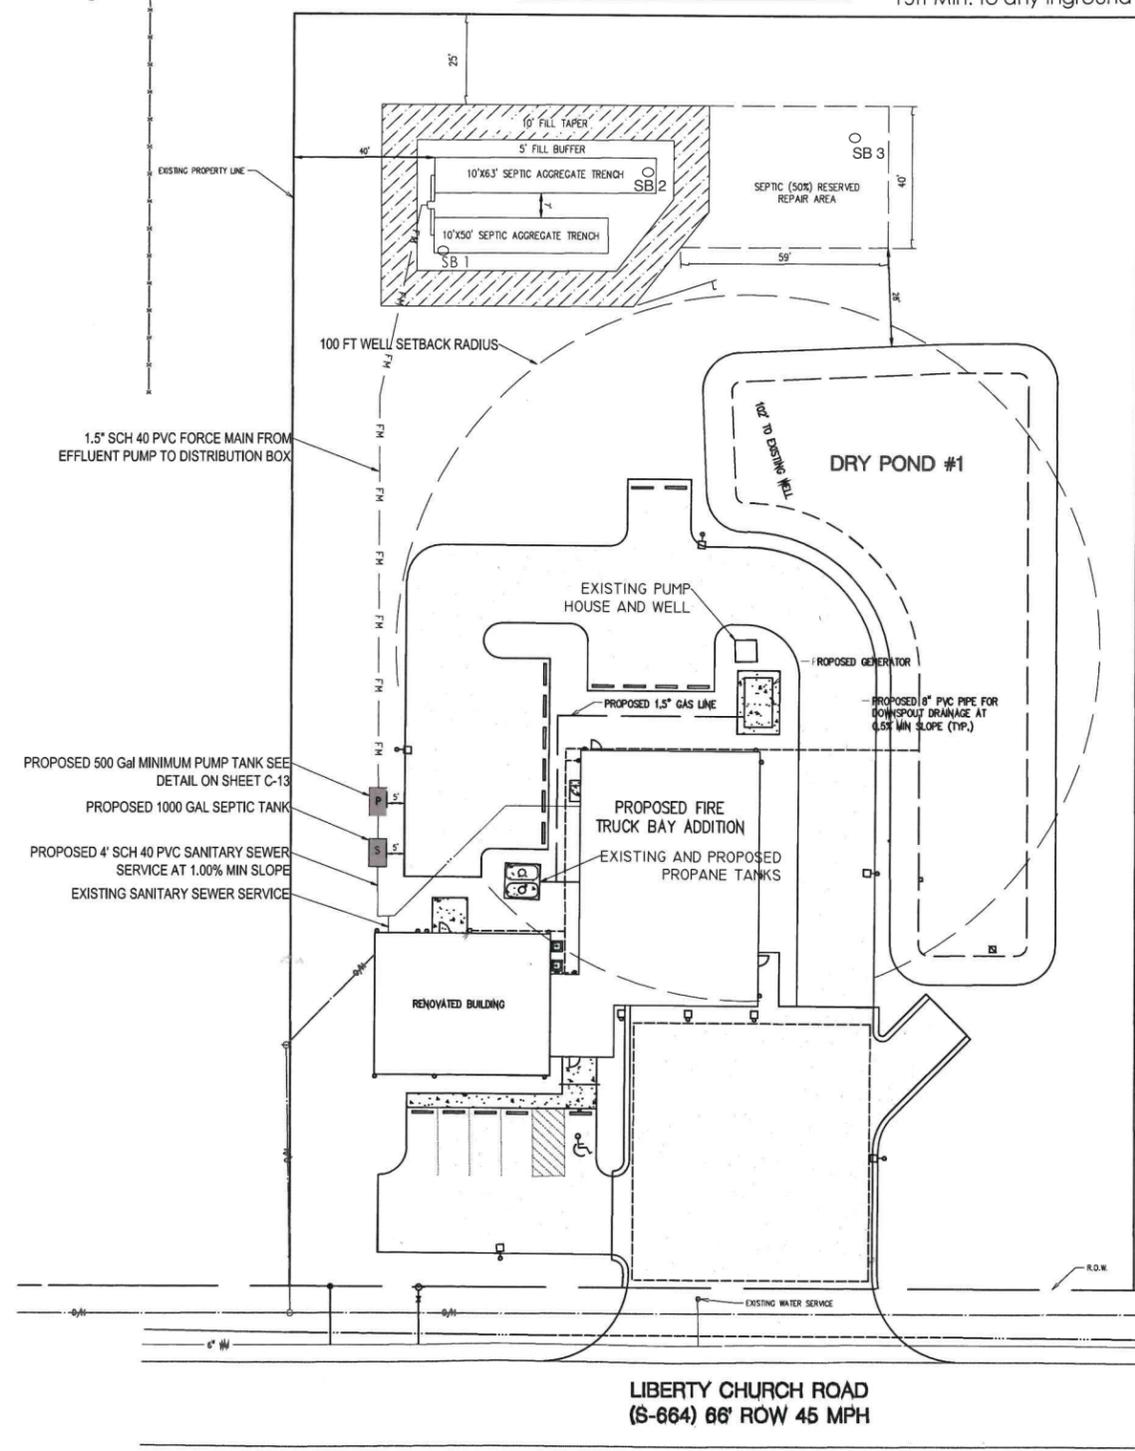

DETAILED INFORMATION ON STORM STRUCTURES AND PIPES, SEE SWMS AND DRAINAGE PLAN ON SHEET C-7  
 POND INFORMATION, SEE GRADING AND DRAINAGE PLAN ON SHEET C-7  
 ELECTRICAL PLANS FOR CONDUIT INFORMATION AND LOCATION

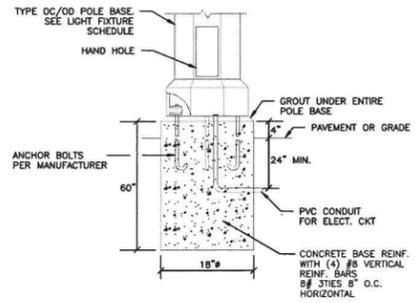

POLE BASE DETAIL  
 SCALE: NONE

Setbacks  
 5ft Min. Property Line  
 5ft Min. to Foundation  
 75ft Min. to and Private Wells  
 100ft Min. to and Public Wells  
 75ft Min. to any impounded water  
 25ft Min. to Drainage Ditch or Detention Pond (Dry)  
 15ft Min. to any Inground Pool



DOYLE ARCHITECTURE, LLC  
 315 MAIN STREET, SUITE 2B  
 CONWAY, SC 29526  
 843.455.6879



Additional & Renovations to:  
**GORETOWN FIRE STATION**  
 Loris, South Carolina  
 For:  
**HORRY COUNTY GOVERNMENT**

PROJECT NO: 22-136  
 DATE: July 31, 2023  
 Construction Documents

These drawings and the information contained herein are the sole property of Doyle Architecture, LLC. Unauthorized reproduction and/or reuse may be prosecuted in accordance with applicable copyright and patent laws.  
 Copyright: 2023, Doyle Architecture, LLC.

REVISIONS:


TITLE:  
**UTILITY PLAN**

SHEET:  
**C-6**

**ROWE PROFESSIONAL SERVICES COMPANY**  
 3 DAYS BEFORE DIGGING IN SOUTH CAROLINA  
**CALL 1-888-721-7877**  
 PALMETTO UTILITY PROTECTION SERVICE

6009 N. Kings Highway Myrtle Beach, SC 29577  
 O: (843) 444-1020 F: (843) 448-3936 www.rowepsc.com








**TEMPORARY CONSTRUCTION ENTRANCE PAD**

- NOT TO SCALE
1. STABILIZED CONSTRUCTION ENTRANCE SHOULD BE USED AT ALL POINTS WHERE TRAFFIC WILL BE LEAVING A BASIN.
  2. IF WASHING IS USED, PROVISIONS MUST BE MADE TO INTERCEPT THE WASH WATER AND TRAP THE SEDIMENT BEFORE IT IS CARRIED OFF SITE. WASHWATER PROVISIONS SHOULD BE DESIGNED AS NEEDED. WASHWATER BASIN IN GENERAL MUST BE ESTABLISHED WITH CRUSHED GRAVEL AND DRAIN INTO A SEDIMENT TRAP OR SEDIMENT BASIN. CONSTRUCTION ENTRANCES SHOULD BE USED IN CONJUNCTION WITH THE STABILIZATION OF CONSTRUCTION SITES TO REDUCE THE AMOUNT OF MUD PROVED BY VEHICLES.
  3. REMOVE ALL VEGETATION AND ANY OBJECTIONABLE MATERIALS FROM THE FOUNDATION AREA.
  4. DIVERSIFY ALL SURFACE RUNOFF AND DRAINAGE FROM STONES TO A SEDIMENT TRAP OR BASIN.
  5. INSTALL A NON-WOVEN GEOTEXTILE FABRIC THAT MEETS THE REQUIREMENTS OF SECTION 804.11 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION TO PLACING AND FINISHING ANY STONE.
  6. MINIMUM DIMENSIONS OF THE ENTRANCE SHALL BE 12-FT WIDE X 50-FT LONG, AND MAY BE MODIFIED AS NECESSARY TO ACCOMMODATE SITE CONSTRAINTS.
  7. INSPECT CONSTRUCTION ENTRANCES EVERY SEVEN (7) CALENDAR DAYS. CHECK FOR MUD AND SEDIMENT BUILDUP, AS WELL AS ANY INSTABILITY. MAINTENANCE IS REQUIRED MORE FREQUENTLY IN WET WEATHER CONDITIONS. RESHAPE FREQUENTLY AS NEEDED FOR DAMAGE AND RUNOFF CONTROL.
  8. WASH OR REPLACE STONES AS NEEDED AND AS DIRECTED BY THE ENGINEER. THE STONE IN THE ENTRANCE SHOULD BE WASHED OR REPLACED WHENEVER THE ENTRANCE FAILS TO REDUCE MUD BEING CARRIED OFF SITE BY VEHICLES.
  9. IMMEDIATELY REMOVE MUD AND SEDIMENT TRACKED ON WASHING ROAD BY BUSHING OR SWEeping.
  10. FLUSHING SHOULD ONLY BE USED WHEN THE WATER CAN BE DISCHARGED TO A SEDIMENT TRAP OR BASIN.

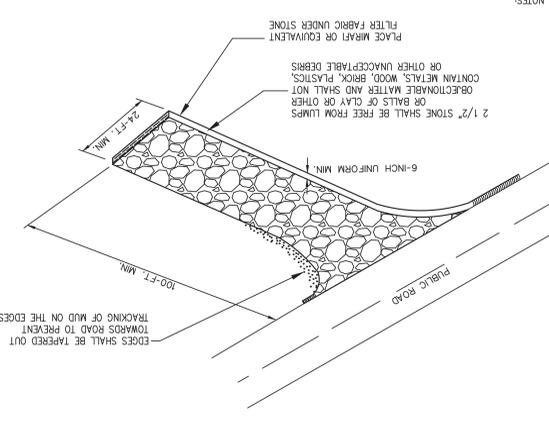

**SEDIMENT TUBE SPACING**


SEDIMENT TUBE SPACING

SLOPE	MAX. SEDIMENT TUBE SPACING
LESS THAN 2%	150- FEET
2%	100- FEET
3%	75- FEET
4%	50- FEET
5%	40- FEET
6%	30- FEET
GREATER THAN 6%	25- FEET

SEDIMENT TUBES

Health and Environmental Control

NOT TO SCALE

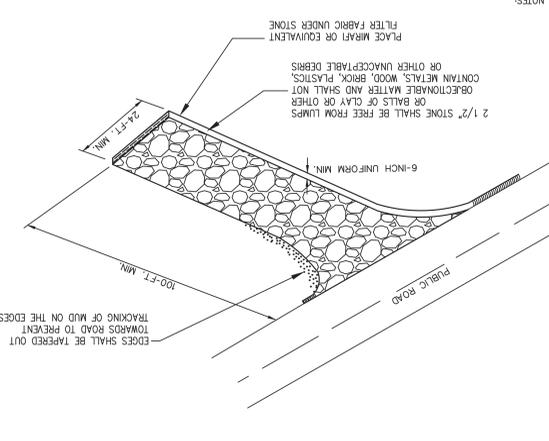


**SEDIMENT TUBES**

- Health and Environmental Control
- NOT TO SCALE
- SEDIMENT TUBES
- Health and Environmental Control
- South Carolina Department of Health and Environmental Control
- GENERAL NOTES
1. Sediment tubes shall be installed in a staggered pattern along the slope.
  2. Sediment tubes shall be installed in a staggered pattern along the slope.
  3. Sediment tubes shall be installed in a staggered pattern along the slope.
  4. Sediment tubes shall be installed in a staggered pattern along the slope.
  5. Sediment tubes shall be installed in a staggered pattern along the slope.
  6. Sediment tubes shall be installed in a staggered pattern along the slope.
  7. Sediment tubes shall be installed in a staggered pattern along the slope.
  8. Sediment tubes shall be installed in a staggered pattern along the slope.
  9. Sediment tubes shall be installed in a staggered pattern along the slope.
  10. Sediment tubes shall be installed in a staggered pattern along the slope.
  11. Sediment tubes shall be installed in a staggered pattern along the slope.
  12. Sediment tubes shall be installed in a staggered pattern along the slope.

**SILT FENCE DETAIL**

- NOT TO SCALE
- SILT FENCE DETAIL
- Health and Environmental Control
- South Carolina Department of Health and Environmental Control
- GENERAL NOTES
1. Sediment tubes shall be installed in a staggered pattern along the slope.
  2. Sediment tubes shall be installed in a staggered pattern along the slope.
  3. Sediment tubes shall be installed in a staggered pattern along the slope.
  4. Sediment tubes shall be installed in a staggered pattern along the slope.
  5. Sediment tubes shall be installed in a staggered pattern along the slope.
  6. Sediment tubes shall be installed in a staggered pattern along the slope.
  7. Sediment tubes shall be installed in a staggered pattern along the slope.
  8. Sediment tubes shall be installed in a staggered pattern along the slope.
  9. Sediment tubes shall be installed in a staggered pattern along the slope.
  10. Sediment tubes shall be installed in a staggered pattern along the slope.
  11. Sediment tubes shall be installed in a staggered pattern along the slope.
  12. Sediment tubes shall be installed in a staggered pattern along the slope.

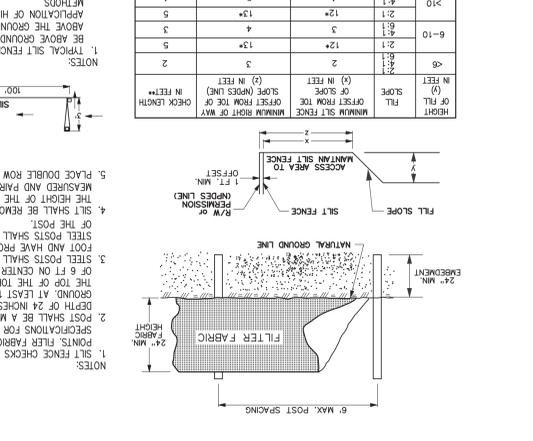


**SEDIMENT TUBES**

- Health and Environmental Control
- NOT TO SCALE
- SEDIMENT TUBES
- Health and Environmental Control
- South Carolina Department of Health and Environmental Control
- GENERAL NOTES
1. Sediment tubes shall be installed in a staggered pattern along the slope.
  2. Sediment tubes shall be installed in a staggered pattern along the slope.
  3. Sediment tubes shall be installed in a staggered pattern along the slope.
  4. Sediment tubes shall be installed in a staggered pattern along the slope.
  5. Sediment tubes shall be installed in a staggered pattern along the slope.
  6. Sediment tubes shall be installed in a staggered pattern along the slope.
  7. Sediment tubes shall be installed in a staggered pattern along the slope.
  8. Sediment tubes shall be installed in a staggered pattern along the slope.
  9. Sediment tubes shall be installed in a staggered pattern along the slope.
  10. Sediment tubes shall be installed in a staggered pattern along the slope.
  11. Sediment tubes shall be installed in a staggered pattern along the slope.
  12. Sediment tubes shall be installed in a staggered pattern along the slope.





**CONCRETE WASHOUT AREA**

- NOT TO SCALE
- CONCRETE WASHOUT AREA
- Health and Environmental Control
- South Carolina Department of Health and Environmental Control
- GENERAL NOTES
1. Concrete washout area must be installed prior to any concrete placement on site.
  2. Signs shall be placed at the construction entrance at the washout area, and elsewhere as necessary to clearly indicate the location of the concrete washout area to operators of concrete trucks.
  3. The concrete washout area shall be repaired or cleaned out as necessary to maintain capacity for concrete waste.

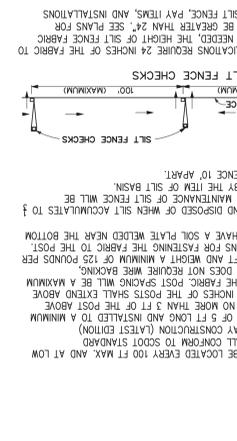

**DEWATERING DETAIL**

- NOT TO SCALE
- DEWATERING DETAIL
- Health and Environmental Control
- South Carolina Department of Health and Environmental Control
- GENERAL NOTES
1. Sediment tubes shall be installed in a staggered pattern along the slope.
  2. Sediment tubes shall be installed in a staggered pattern along the slope.
  3. Sediment tubes shall be installed in a staggered pattern along the slope.
  4. Sediment tubes shall be installed in a staggered pattern along the slope.
  5. Sediment tubes shall be installed in a staggered pattern along the slope.
  6. Sediment tubes shall be installed in a staggered pattern along the slope.
  7. Sediment tubes shall be installed in a staggered pattern along the slope.
  8. Sediment tubes shall be installed in a staggered pattern along the slope.
  9. Sediment tubes shall be installed in a staggered pattern along the slope.
  10. Sediment tubes shall be installed in a staggered pattern along the slope.
  11. Sediment tubes shall be installed in a staggered pattern along the slope.
  12. Sediment tubes shall be installed in a staggered pattern along the slope.

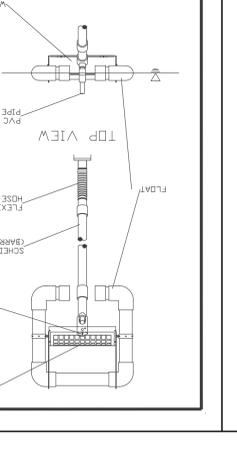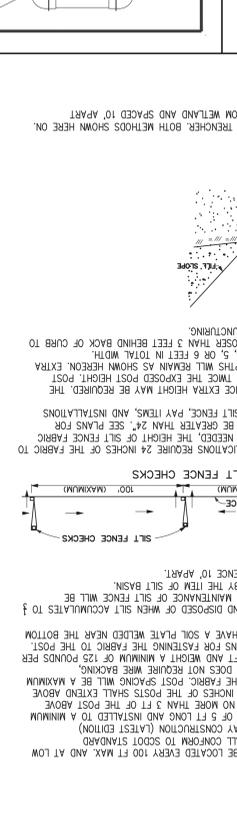

FLOW CAPACITIES (IN CU. FT.) FOR THE FAIRCLOTH SKIMMER®

Skimmer size	24 hours	2 day	3 day	4 day	5 day	6 day	7 day
1.5" x 2.5" x 6"	1,728	6,566	9,849	9,812	9,812	9,812	9,812
2" x 3" x 8"	3,456	13,132	19,698	19,698	19,698	19,698	19,698
3" x 4" x 12"	5,184	19,698	29,547	29,547	29,547	29,547	29,547
4" x 6" x 18"	6,912	26,264	39,430	39,430	39,430	39,430	39,430
6" x 9" x 27"	10,368	39,430	59,145	59,145	59,145	59,145	59,145
8" x 12" x 36"	13,824	52,573	78,860	78,860	78,860	78,860	78,860
10" x 15" x 45"	17,280	69,164	104,480	104,480	104,480	104,480	104,480
12" x 18" x 54"	20,736	85,755	129,096	129,096	129,096	129,096	129,096
15" x 22.5" x 67.5"	27,648	114,340	172,120	172,120	172,120	172,120	172,120
18" x 27" x 81"	34,560	142,925	214,160	214,160	214,160	214,160	214,160
24" x 36" x 108"	46,080	190,566	285,552	285,552	285,552	285,552	285,552
30" x 45" x 135"	57,600	238,207	357,040	357,040	357,040	357,040	357,040
36" x 54" x 162"	69,120	285,848	428,528	428,528	428,528	428,528	428,528
42" x 63" x 189"	80,640	333,489	500,016	500,016	500,016	500,016	500,016
48" x 72" x 216"	92,160	381,130	571,504	571,504	571,504	571,504	571,504
54" x 81" x 243"	103,680	428,771	643,000	643,000	643,000	643,000	643,000
60" x 90" x 270"	115,200	476,412	714,488	714,488	714,488	714,488	714,488
66" x 99" x 297"	126,720	524,053	785,976	785,976	785,976	785,976	785,976
72" x 108" x 324"	138,240	571,694	857,464	857,464	857,464	857,464	857,464
78" x 117" x 351"	149,760	619,335	928,952	928,952	928,952	928,952	928,952
84" x 126" x 378"	161,280	666,976	1,000,440	1,000,440	1,000,440	1,000,440	1,000,440
90" x 135" x 405"	172,800	714,617	1,071,928	1,071,928	1,071,928	1,071,928	1,071,928
96" x 144" x 432"	184,320	762,258	1,143,416	1,143,416	1,143,416	1,143,416	1,143,416
102" x 153" x 459"	195,840	809,899	1,214,904	1,214,904	1,214,904	1,214,904	1,214,904
108" x 162" x 486"	207,360	857,540	1,286,392	1,286,392	1,286,392	1,286,392	1,286,392
114" x 171" x 513"	218,880	905,181	1,357,880	1,357,880	1,357,880	1,357,880	1,357,880
120" x 180" x 540"	230,400	952,822	1,429,368	1,429,368	1,429,368	1,429,368	1,429,368
126" x 189" x 567"	241,920	1,000,463	1,500,856	1,500,856	1,500,856	1,500,856	1,500,856
132" x 198" x 594"	253,440	1,048,104	1,572,344	1,572,344	1,572,344	1,572,344	1,572,344
138" x 207" x 621"	264,960	1,095,745	1,643,832	1,643,832	1,643,832	1,643,832	1,643,832
144" x 216" x 648"	276,480	1,143,386	1,715,320	1,715,320	1,715,320	1,715,320	1,715,320
150" x 225" x 675"	288,000	1,191,027	1,786,808	1,786,808	1,786,808	1,786,808	1,786,808
156" x 234" x 702"	299,520	1,238,668	1,858,296	1,858,296	1,858,296	1,858,296	1,858,296
162" x 243" x 729"	311,040	1,286,309	1,929,784	1,929,784	1,929,784	1,929,784	1,929,784
168" x 252" x 756"	322,560	1,333,950	2,001,272	2,001,272	2,001,272	2,001,272	2,001,272
174" x 261" x 783"	334,080	1,381,591	2,072,760	2,072,760	2,072,760	2,072,760	2,072,760
180" x 270" x 810"	345,600	1,429,232	2,144,248	2,144,248	2,144,248	2,144,248	2,144,248
186" x 279" x 837"	357,120	1,476,873	2,215,736	2,215,736	2,215,736	2,215,736	2,215,736
192" x 288" x 864"	368,640	1,524,514	2,287,224	2,287,224	2,287,224	2,287,224	2,287,224
198" x 297" x 891"	380,160	1,572,155	2,358,712	2,358,712	2,358,712	2,358,712	2,358,712
204" x 306" x 918"	391,680	1,619,796	2,430,200	2,430,200	2,430,200	2,430,200	2,430,200
210" x 315" x 945"	403,200	1,667,437	2,501,688	2,501,688	2,501,688	2,501,688	2,501,688
216" x 324" x 972"	414,720	1,715,078	2,573,176	2,573,176	2,573,176	2,573,176	2,573,176
222" x 333" x 999"	426,240	1,762,719	2,644,664	2,644,664	2,644,664	2,644,664	2,644,664
228" x 342" x 1,026"	437,760	1,810,360	2,716,152	2,716,152	2,716,152	2,716,152	2,716,152
234" x 351" x 1,053"	449,280	1,858,001	2,787,640	2,787,640	2,787,640	2,787,640	2,787,640
240" x 360" x 1,080"	460,800	1,905,642	2,859,128	2,859,128	2,859,128	2,859,128	2,859,128
246" x 369" x 1,107"	472,320	1,953,283	2,930,616	2,930,616	2,930,616	2,930,616	2,930,616
252" x 378" x 1,134"	483,840	2,000,924	3,002,104	3,002,104	3,002,104	3,002,104	3,002,104
258" x 387" x 1,161"	495,360	2,048,565	3,073,592	3,073,592	3,073,592	3,073,592	3,073,592
264" x 396" x 1,188"	506,880	2,096,206	3,145,080	3,145,080	3,145,080	3,145,080	3,145,080
270" x 405" x 1,215"	518,400	2,143,847	3,216,568	3,216,568	3,216,568	3,216,568	3,216,568
276" x 414" x 1,242"	529,920	2,191,488	3,288,056	3,288,056	3,288,056	3,288,056	3,288,056
282" x 423" x 1,269"	541,440	2,239,129	3,359,544	3,359,544	3,359,544	3,359,544	3,359,544
288" x 432" x 1,296"	552,960	2,286,770	3,431,032	3,431,032	3,431,032	3,431,032	3,431,032
294" x 441" x 1,323"	564,480	2,334,411	3,502,520	3,502,520	3,502,520	3,502,520	3,502,520
300" x 450" x 1,350"	576,000	2,382,052	3,574,008	3,574,008	3,574,008	3,574,008	3,574,008
306" x 459" x 1,377"	587,520	2,429,693	3,645,496	3,645,496	3,645,496	3,645,496	3,645,496
312" x 468" x 1,404"	599,040	2,477,334	3,716,984	3,716,984	3,716,984	3,716,984	3,716,984
318" x 477" x 1,431"	610,560	2,524,975	3,788,472	3,788,472	3,788,472	3,788,472	3,788,472
324" x 486" x 1,458"	622,080	2,572,616	3,859,960	3,859,960	3,859,960	3,859,960	3,859,960
330" x 495" x 1,485"	633,600	2,620,257	3,931,448	3,931,448	3,931,448	3,931,448	3,931,448
336" x 504" x 1,512"	645,120	2,667,898	4,002,936	4,002,936	4,002,936	4,002,936	4,002,936
342" x 513" x 1,539"	656,640	2,715,539	4,074,424	4,074,424	4,074,424	4,074,424	4,074,424
348" x 522" x 1,566"	668,160	2,763,180	4,145,912	4,145,912	4,145,912	4,145,912	4,145,912
354" x 531" x 1,593"	679,680	2,810,821	4,217,400	4,217,400	4,217,400	4,217,400	4,217,400
360" x 540" x 1,620"	691,200	2,858,462	4,288,888	4,288,888	4,288,888	4,288,888	4,288,888
366" x 549" x 1,647"	702,720	2,906,103	4,360,376	4,360,376			

