




VN-EST-K5

LCD Central Display Screen

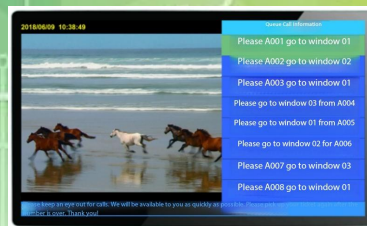

Features

- Integrated all-in-one LCD unit with integrated design, including LCD display module, main control board, speaker, Android operating system and queueing- information display software with powerful and flexible functions.
- LAN-based transmission (wired and Wi-Fi wireless supported). Equipped with a 55-inch LCD monitor, normally deployed in the waiting area.
- Supports bottom-to-top scrolling display of queueing call-up information for all service windows.
- Supports date and time display.
- Supports full-screen or partial-screen playback of TV programs and video files.
- Displays queueing ticket numbers and names of waiting visitors.
- Triggers full-screen queueing information upon call-up; TV or video playback resumes after user-configurable time interval
- Allows free input of courtesy remarks and other text prompts for display.
- Supports modification of font type, size, color and position for displayed contents.
- User-defined background images are supported.

Technical Specifications

Screen	55-inch IPS high-definition screen
Resolution	1920*1080
Aspect Ratio	16:9 display area
CPU	Quad-core ARM Cortex-A17, 1.6 GHz (max. 1.8 GHz)
GPU	Mali-T764 GPU with AFBC (Frame Buffer Compression)
RAM	2 GB
Storage	32 GB
Operating System	Android 7.1
Interface	HDMI/USB/RJ45
Power Input & Power Consumption	110-240V 50HZ/60HZ, 160W
Video Support	RMVB, MPEG1/2/4, AVI, WMV9, H.264
Audio Support	MP3, WMA, WAV
Scheduled Power On / Off	Support
RTC Real-time Clock	Support