



VN-CUE5424D

Elevator Access Controller



Technical Specifications

System

Main Processor	Embedded Processor
Internet Protocol	P2P; IPv4; DNS; DDNS; TCP; UDP
Interoperability	ONVIF; CGI
SDK and API	Yes

Basic

Product Type	Controller
Buzzer	Yes
Casing Material	PC + ABS

Function

Unlock Mode	Card; remote; password; fingerprint; Bluetooth; combination unlock
Period List	128 periods
Holiday Period	128 periods
Network Update	Yes
Blocklist/Allowlist	Yes
Peripheral Card Reader	Supports 2 × RS-485 card readers; 2 × Wiegand card readers
Multi-user Authentication	Yes (Use with platform)
Real-time Monitoring	Yes
Multi-factor Authentication	Yes
Web Configuration	Yes

User

User (Card) Type	General user, VIP user, guest user, patrol user, blocklist user, and other users
------------------	--

Features:

- Integrated web server with main and subordinate operating modes.
- In main mode, manages up to 19 subordinate controllers; subordinate mode supports platform management.
- Main-mode capacity: 1,000 users, 3,000 fingerprints, 5,000 Bluetooth cards and 300,000 records.
- Reader communication through Wiegand and RS-485; TCP/IP networking and standard PoE input.
- 12 VDC lock-power output with a maximum current of 1,000 mA.
- Configurable hardware I/O and exportable connection diagrams.
- Power-loss data retention and role-based administration.
- First-person and multi-person unlocking, global anti-passback, global multi-door interlock and global external alarms.

Capacity

User Capacity	1,000 (main control mode), 10,000 (sub control mode)
Fingerprint Capacity	3,000
Card Capacity	5,000 (main control mode), 50,000 (sub control mode)
Bluetooth Card Capacity	5,000
Record Capacity	300,000

Port

RS-485	3
Wiegand	2 × input
Network Port	1 × RJ-45 10/100 Mbps Ethernet port
Alarm Input	2 (digital quantity)
Alarm Output	2 (digital quantity)
Alarm Linkage	Yes
Exit Button	2
Door Status Detection	2
Lock Control	2

Alarm

Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes
Duress Fingerprint	Yes


General

Power Supply	Power in: 12V DC or Power over Ethernet IEEE 802.3at Type 2 Class 4
Protection	IK06
Power Consumption	Standby Power (no peripheral devices): ≤2 W Working Power: Total power budget if powered by DC: 1700 mA at 12 V for peripheral devices (locks, readers etc.) Total power budget if powered by PoE: 1200 mA at 12 V for peripheral devices (locks, readers etc.)
Product Dimensions	186.4 mm × 185.8 mm × 58.3mm (7.34" × 7.31" × 2.30") (L × W × H)
Packaging Dimensions	254 mm × 243 mm × 86 mm (10.00" × 9.57" × 3.39") (L × W × H)
Operating Temperature	-10 °C to +55 °C (+14 °F to 131 °F)
Operating Humidity	5%–95% (RH), non-condensing
Operating Environment	Indoor
Gross Weight	0.99 kg (2.18 lb)
Installation	Surface Mount; Guide Rail Mount
Certifications	CE; FCC; UL

Ordering Information

Type	Model	Description
Access Controller	VN-CUE5424D	Two-door Access Controller B (portable, indoor)

Dimensions (mm[inch])

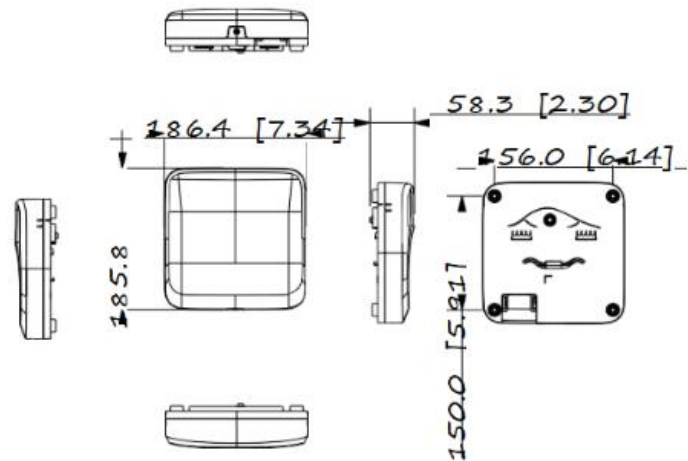

Panels

