

LED STREET LIGHTING



TXLED-10



TXLED-09



TXLED-08



TXLED-07



TXLED-06



TXLED-05





TXLED-103

LED STREET LIGHTING



 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50°C -35°C	 50,000h
--	-------------------	--------------------	---	--	---




TXLED-10

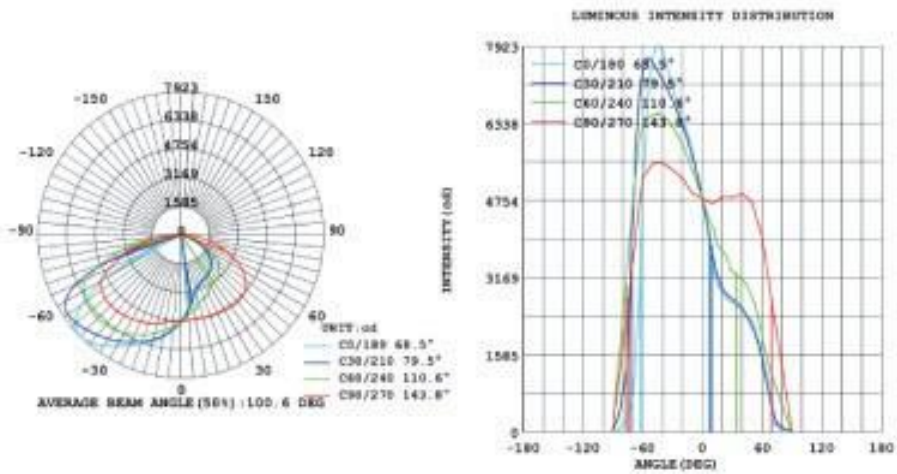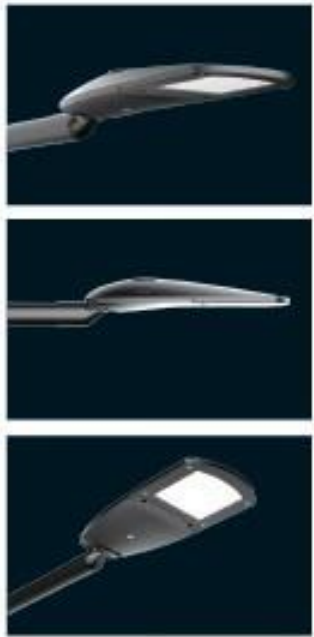



TXLED-10(S)



TXLED-10(M)



TXLED-10(L)

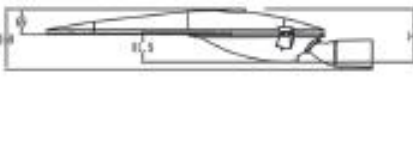

TECHNICAL SPECIFICATION


Product Name	TXLED-10S	TXLED-10M	TXLED-10L
Max Power	90W	150W	240W
LED Chip Quantity	36pcs	64pcs	100pcs
Supply Voltage Range	100-305V AC		
Temperature Range	-25°C/+55°C		
Light Guiding System	PMMA/PC		
Light Source	LUXEON 5050/3030		
Color Temperature	3000-6500K		
Color Rendering Index	>70RA		
Lumen	160 lm/w		
LED Luminous Efficiency	90%		
Lightning Protection	10KV		
Service Life	>50000 Hours		
Housing Material	Die-cast Aluminum		
Sealing Material	Silicone Rubber		
Cover Material	Tempered Glass		
Housing Color	As Customer's Requirement		
Protection Class	IP66		
Mounting Diameter Pption	Φ60mm		
Suggested Mounting Height	6-9m	9-12m	10-12m
Dimension(L*W*H)	610*270*140mm	765*320*140mm	866*372*168mm

LED STREET LIGHTING

 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50°C -35°C	 50,000h
--	-------------------	--------------------	---	--	---




TXLED-09

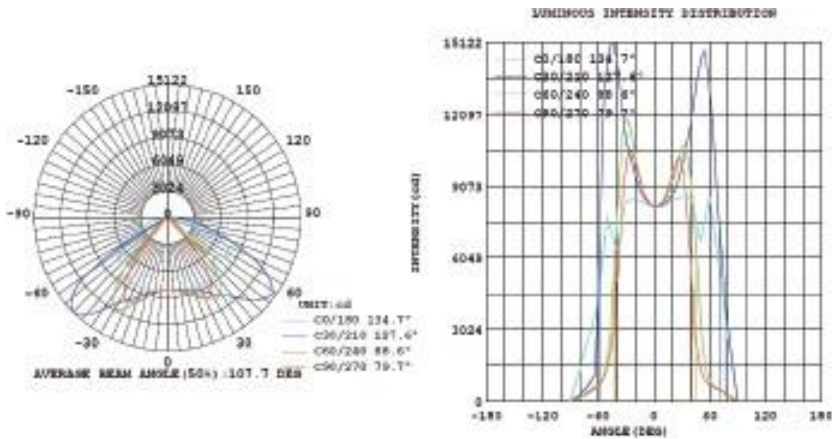

TXLED-09(A)



TXLED-09(B)

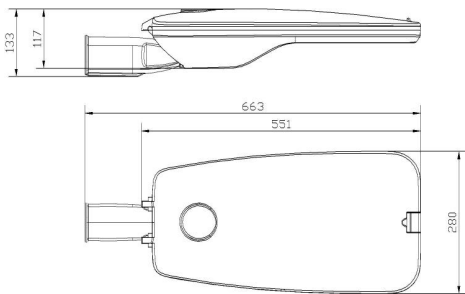

TECHNICAL SPECIFICATION

Product Name	TXLED-09A	TXLED-09B
Max Power	100W	200W
LED Chip Quantity	36pcs	80pcs
Supply Voltage Range	100-305V AC	
Temperature Range	-25℃/+55℃	
Light Guiding System	PC Lens	
Light Source	LUXEON 5050/3030	
Color Temperature	3000-6500K	
Color Rendering Index	>70RA	
Lumen	160 lm/w	
LED Luminous Efficiency	90%	
Lightning Protection	10KV	
Service Life	>50000 Hours	
Housing Material	Die-cast Aluminum	
Sealing Material	Silicone Rubber	
Cover Material	Tempered Glass	
Housing Color	As Customer's Requirement	
Protection Class	IP66	
Mounting Diameter Pption	Φ60mm	
Suggested Mounting Height	8-10m	10-12m
Dimension(L*W*H)	663*280*133mm	813*351*137mm

LED STREET LIGHTING

 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50℃ -35℃	 50,000h
--	-------------------	--------------------	---	--	---



TXLED-08





30W

40W




50W

60W

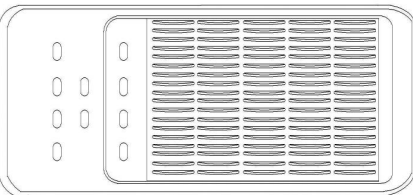

Module quantity	L	W	H
1pc	420	355	80
2pcs	500	355	155
3pcs	580	355	155
4pcs	660	355	155
5pcs	740	355	155
6pcs	820	355	155
7pcs	900	355	155
8pcs	980	355	155
9pcs	1060	355	155
10pcs	1140	355	155

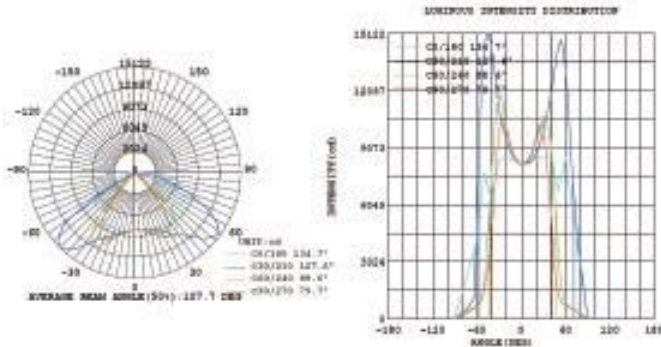

TECHNICAL SPECIFICATION


Product Name	TXLED-08
Max Power	360W
Supply Voltage Range	100-305V AC
Temperature Range	-25℃/+55℃
Light Guiding System	PC lens
Light Source	LUXEON 3030/5050
Color Temperature	3000-6500K
Color Rendering Index	>70RA
Lumen	160 lm/w
LED Luminous Efficiency	90%
Lightning Protection	10KV
Service Life	>50000 Hours
Housing Material	Die-cast Aluminum
Housing Color	As Customer's Requirement
Protection Class	IP66
Mounting Diameter Option	Φ60mm
Suggested Mounting Height	5-12m

LED STREET LIGHTING


 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50°C -35°C	 50,000h
--	-------------------	--------------------	---	--	---



TXLED-07

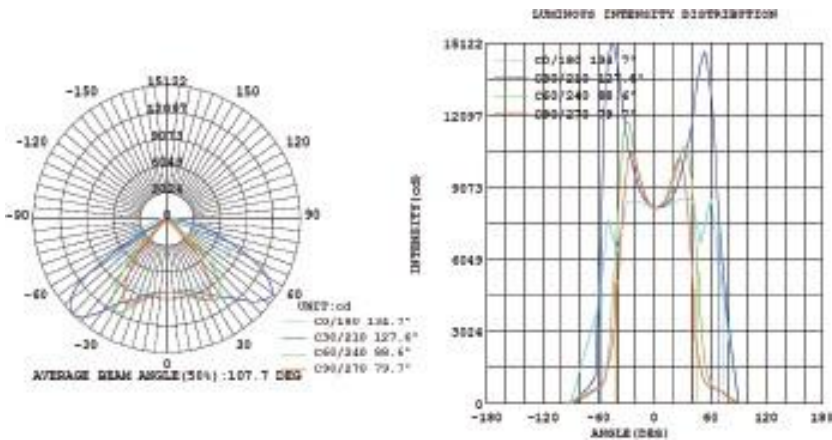

TXLED-07

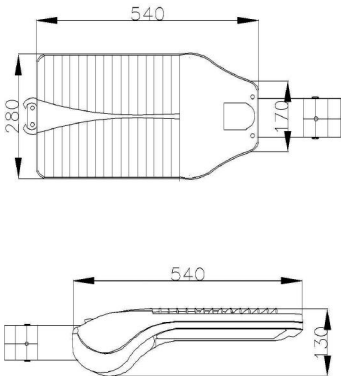

TECHNICAL SPECIFICATION

Product Name	TXLED-07
Max Power	100W
Supply Voltage Range	100-305V AC
Temperature Range	-25°C/+55°C
Light Guiding System	PC lens
Light Source	LUXEON 3030
Color Temperature	3000-6500K
Color Rendering Index	>70RA
Lumen	160 lm/w
LED Luminous Efficiency	90%
Lightning Protection	10KV
Service Life	>50000 Hours
Housing Material	Die-cast Aluminum
Sealing Material	Silicone Rubber
Cover Material	Tempered Glass
Housing Color	As Customer's Requirement
Protection Class	IP66
Mounting Diameter Option	Φ60mm
Suggested Mounting Height	5-12m
Dimension(L*W*H)	530*280*156mm

LED STREET LIGHTING

 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50℃ -35℃	 50,000h
--	-------------------	--------------------	---	--	---



TXLED-06




30W

40W




50W

60W

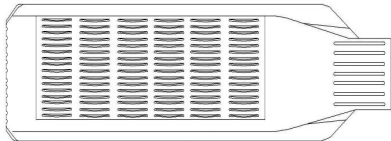

Module quantity	L	W	H
1pc	480	355	155
2pcs	560	355	155
3pcs	640	355	155
4pcs	720	355	155
5pcs	800	355	155
6pcs	880	355	155
7pcs	960	355	155
8pcs	1040	355	155
9pcs	1120	355	155
10pcs	1200	355	155

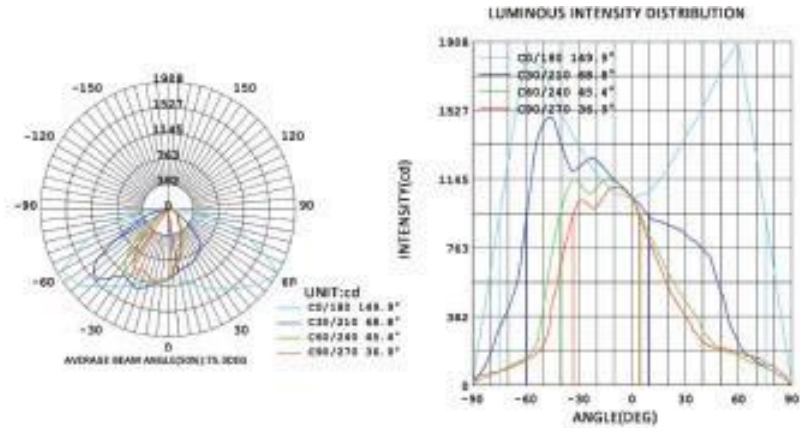


TECHNICAL SPECIFICATION

Product Name	TXLED-06
Max Power	360W
Supply Voltage Range	100-305V AC
Temperature Range	-25℃/+55℃
Light Guiding System	PC lens
Light Source	LUXEON 3030/5050
Color Temperature	3000-6500k
Color Rendering Index	>70RA
Lumen	≥130 lm/w
LED Luminous Efficiency	90%
Lightning Protection	10KV
Service Life	>50000 Hours
Housing Material	Die-cast Aluminum
Housing Color	As Customer's Requirement
Protection Class	IP66
Mounting Diameter Pption	Φ60mm
Suggested Mounting Height	5-12m

LED STREET LIGHTING

 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50℃ -35℃	 50,000h
--	-------------------	--------------------	---	--	---

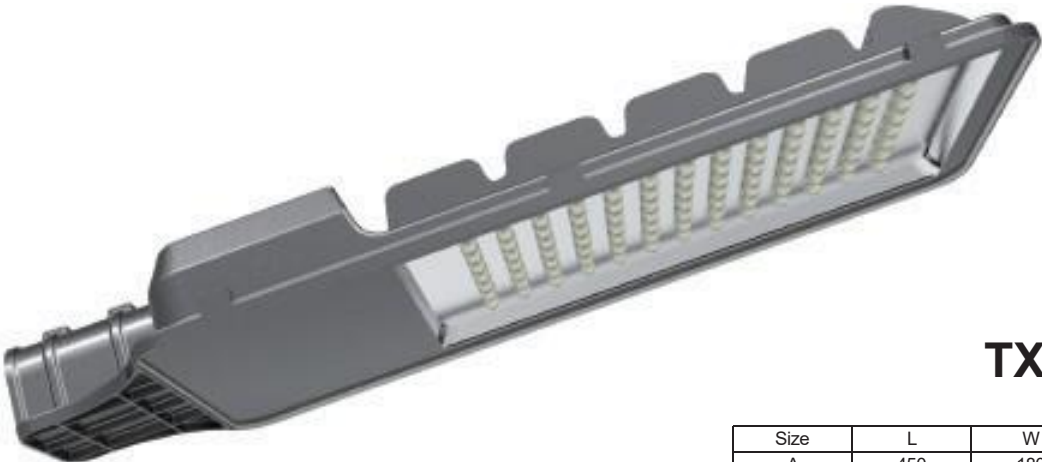


TXLED-05


Size	L	W	H
A	450	180	52
B	550	210	55
C	680	278	80
D	780	278	80
E	975	380	94




TXLED-05(A)




TXLED-05(B)





TXLED-05(C)



TXLED-05(D)



TXLED-05(E)

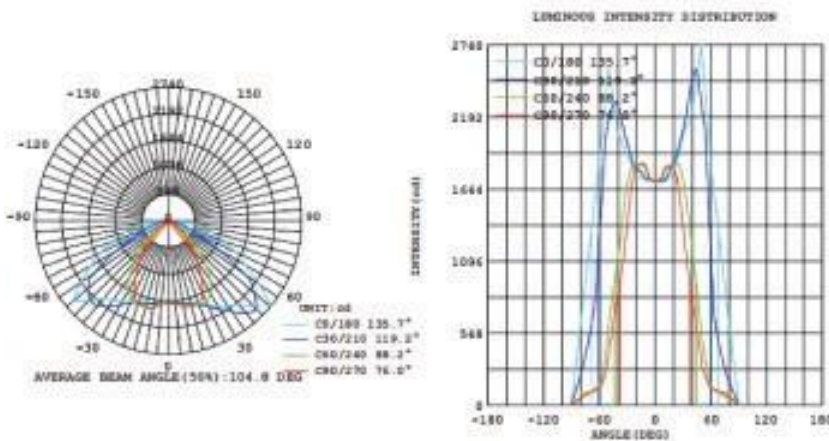

TECHNICAL SPECIFICATION

Product Name	TXLED-05 A/B/C/D/E
Max Power	30W/60W/120W/200W/300W
Supply Voltage Range	100-305V AC
Temperature Range	-25℃/+55℃
Light Guiding System	PC lens
Light Source	LUXEON 3030
Color Temperature	3000-6500K
Color Rendering Index	>70RA
Lumen	160 lm/w
LED Luminous Efficiency	90%
Lightning Protection	10KV
Service Life	>50000 Hours
Housing Material	Die-cast Aluminum
Sealing Material	Silicone Rubber
Cover Material	Tempered Glass
Housing Color	As Customer's Requirement
Protection Class	IP66
Mounting Diameter Option	Φ60mm
Suggested Mounting Height	5-12m

LED STREET LIGHTING

 AC100-305V	CRI >80	PF >0.95	 10%~90%	 +50℃ -35℃	 50,000h
--	-------------------	--------------------	---	--	---



TXLED-103




Model	Max power	Max led chip quantity	Size
TXLED-103A	100w	144pcs	422*320*140mm
TXLED-103B	150w	240pcs	522*320*140mm
TXLED-103C	180w	288pcs	600*320*140mm
TXLED-103D	240w	336pcs	700*320*140mm
TXLED-103E	400w	480pcs	853*320*140mm




TECHNICAL SPECIFICATION

Product Name	TXLED-103 A/B/C/D/E
Max Power	100W/150W/180W/240W/400W
Supply Voltage Range	100-305V AC
Temperature Range	-25℃/+55℃
Light Guiding System	PC lens
Light Source	LUXEON 3030
Color Temperature	3000-6500K
Color Rendering index	>70RA
Lumen	160 lm/w
LED Luminous Efficiency	90%
Lightning Protection	10KV
Service Life	>50000 Hours
Housing Material	Die-cast Aluminum
Sealing Material	Silicone Rubber
Cover Material	Tempered Glass
Housing Color	As Customer's Requirement
Protection Class	IP66
Mounting Diameter Option	Φ60mm
Suggested Mounting Height	5-12m

LED STREET LIGHT POLE DESIGN

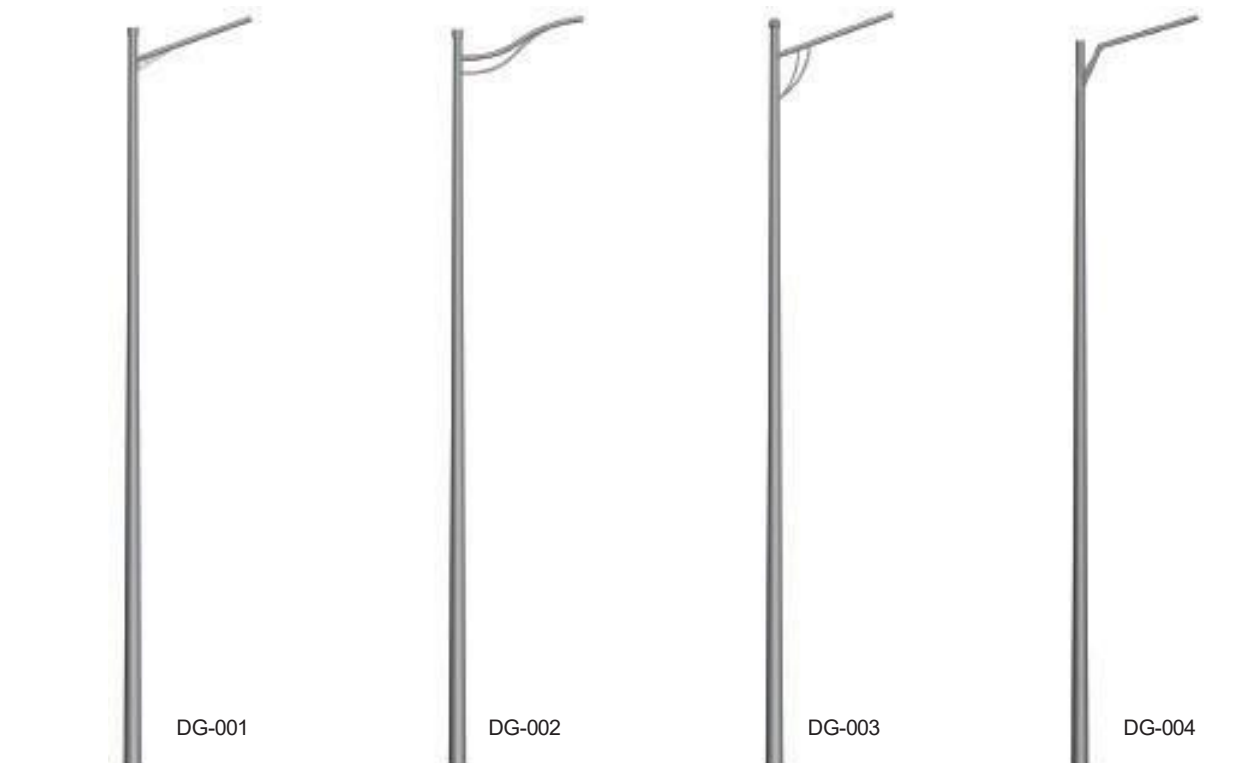

LED STREET LIGHT POLE DESIGN

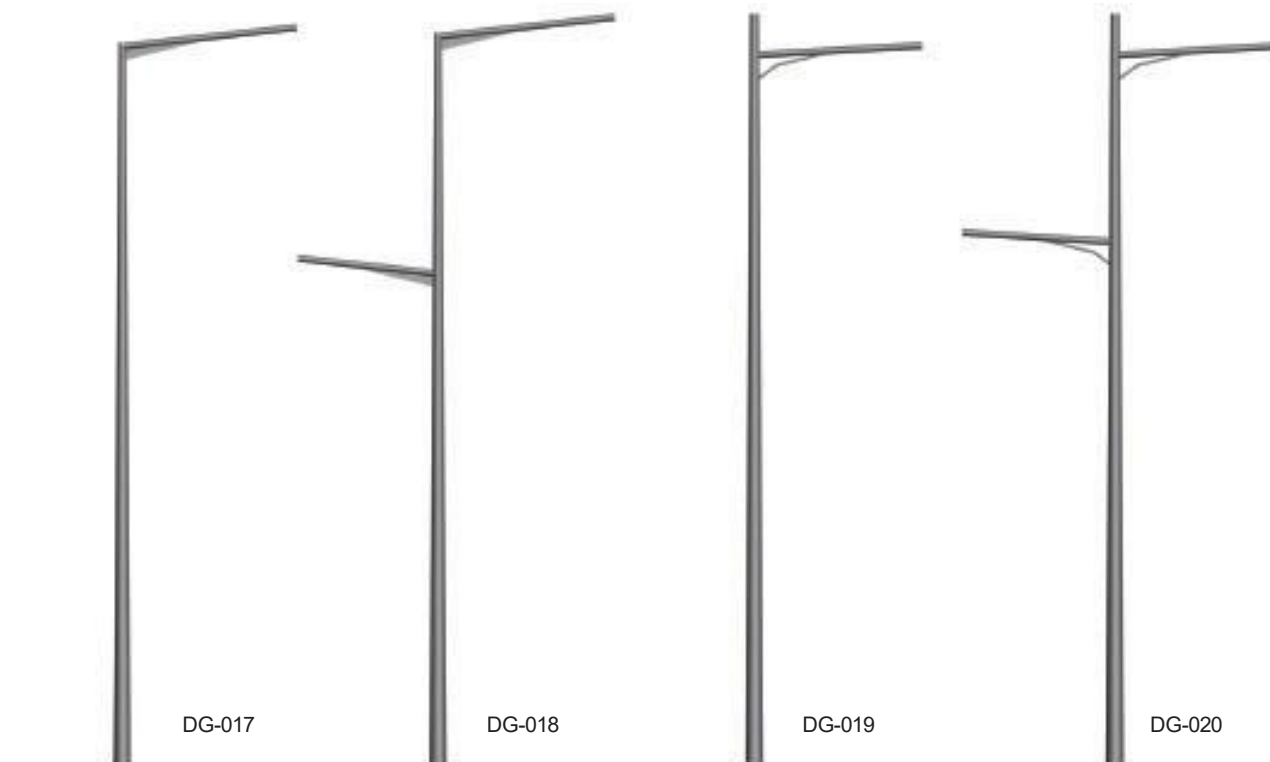

LED FLOOD LIGHT POLE DESIGN

