



Vocare™ IP Based PA System



SPECIFICATIONS


Power Supply	AC100-240V, ≤10W
Protocols	TCP, UDP, ARP, ICMP, IGMP
Network	10/100Mbps
Audio Coding	MP2, MP3, PCM, ADPCM
Audio Sampling	8kHz, 44.1kHz, 16bit, 8kbps-320kbps
S/N	≥90dB, 20Hz-20kHz
Audio Delay	Broadcast delay ≤100ms
Audio Interface	1 line input, 1 line output
Other Interfaces	8 partitions output, 8 short circuit output, 1 controlled power output
Operating Temperature	14° to 122°F / -10° to 50°C
Operating Humidity	≤90%RH
Dimensions	19"×10"×1.7" in / 48.3×25.6×4.4 cm
Weight	7lbs / 3.2kg
Part Number	PA-SYS1

* The latest product information / specification can be found at www.aventurapa.com


KEY FEATURES

- + Rack mounted design
- + Unique 8 partition function
- + Remote partition control
- + 8 channel short circuit outputs
- + Network audio terminal capabilities
- + RJ45 interface

DIMENSIONS

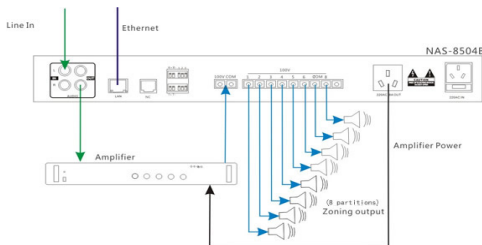

OTHER VOCARE™ PRODUCTS

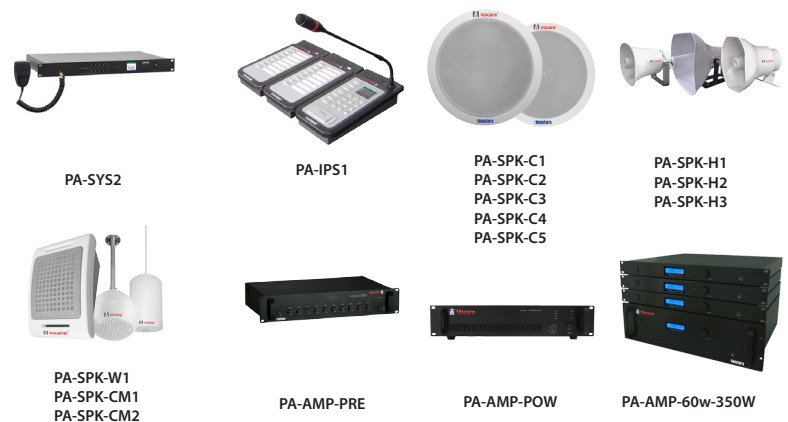

* Data recorded on an SD memory card may be lost or damaged by data access during power-off, mechanical shock, memory card detachment, or other operations. Data loss or damage can also occur when a memory card reaches end of life, which varies according to operational conditions. No guarantee is given against damage (including passive damage).