

# CP04GR-WH/BK/SN

## 4" 3CCT LED Round Gimbal

| Job Information |  |      |
|-----------------|--|------|
| Project Name    |  | Type |
| Location        |  |      |
| Quantity        |  | Date |
| Contact/Name    |  |      |
| Notes           |  |      |

### Body

- Durable Iron body
- White polycarbonate diffuser lens for low glare

### LED Characteristics

- 10-Watt LED Module
- Minimal heat emission
- Up to 800 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

### Dimming

- 10%-100% dimming capability
- Compatible with TRIAC/ELV dimmers

### Environment

- Suitable for damp locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

### Mounting

- Included two springs loaded clips to attach to any ceiling material
- The slim profile allows to be mounted under joists or dock work

### Description

- CP04GR, a 10watt 4-inch 3CCT LED round gimbal is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamline design. Suitable for damp location and use under soffits.

### Beam Spread

- 38 degree beam spread

### LED Driver

- Extruded iron junction box with integrated 210mA dimmable driver included
- LVLE output LED driver with 100-125V AC input; included 12inch cable from the driver to fixture.

### Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring


### Operating Temperature

- -20 C - 40 C (-4°F - 104°F)



## SPECIFICATION

|                   |                            |                 |                          |
|-------------------|----------------------------|-----------------|--------------------------|
| Application       | Ceiling Recessed Mount     | Energy Star     | YES                      |
| Approved Location | DAMP                       | Input           | 100-125V AC, 60Hz, 0.09A |
| Beam Angle        | 38                         | LM 79           | YES                      |
| CCT               | 3000K/4000K/5000K          | LM 80           | YES                      |
| Certification     | cETLus                     | Lumens          | Up to 800                |
| Class II          | YES                        | Lumens per Watt | 69.17                    |
| Color             | White/Black/Brushed Nickel | Power Factor    | >0.90                    |
| CRI               | 80+                        | Projected Life  | 5 Years                  |
| Dimming           | YES                        | Wattage         | 10 Watt                  |
| Dimming Tech      | TRIAC/ELV                  | Cut-Size        | 4 1/4"                   |

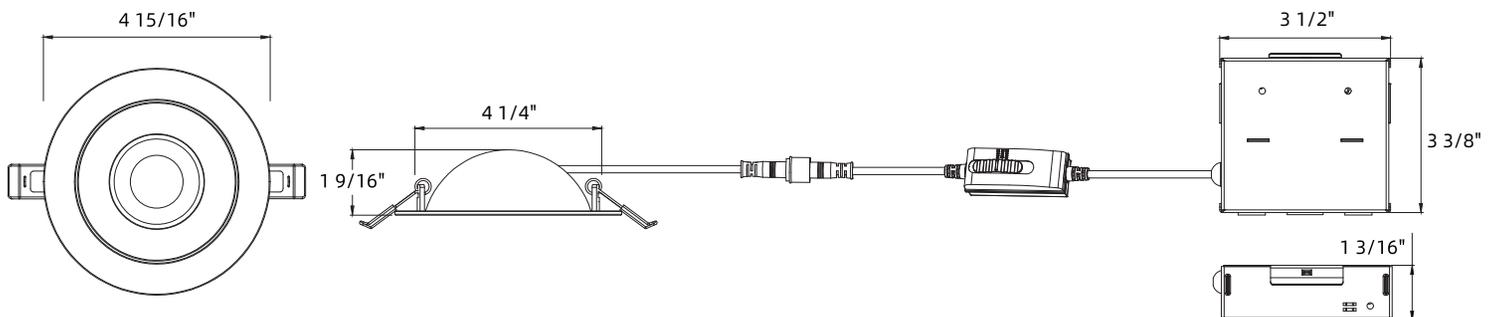

NVC International Inc

T: 647-350-8898  
C: 647-887-3682

E: info@nvcled.ca  
W: www.nvcled.ca