


DR40SF-WH/BK/SN

4inch LED Square Ultra Slim Recess downlight(Air tight)

| Job Information | | |
|-----------------|--|------|
| Project Name | | Type |
| Location | | |
| Quantity | | Date |
| Contact/ Name | | |
| Notes | | |

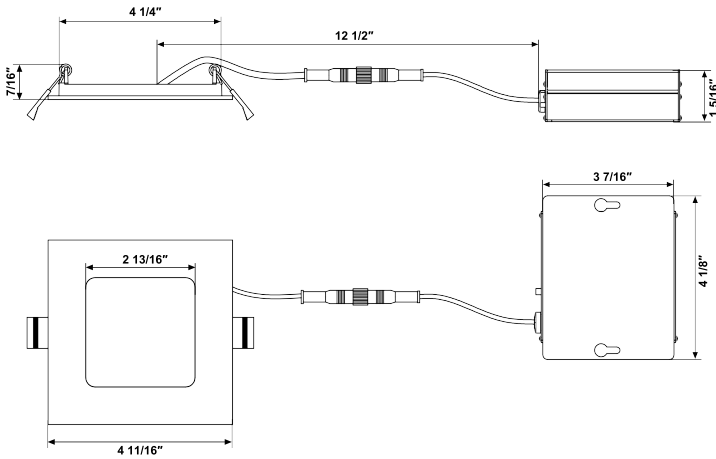

Dimming

- 10%-100% dimming capability
- Compatible with industry TRIAC/ELV dimmers (contact factory for listing of compatible dimmers)

Environment

- Suitable for damp locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

Mounting

- Included two springs loaded clips to attach to any ceiling material
- The slim profile allows to be mounted under joists or dock work
- Easier installation with 4 1/4" round back

Description

- DR40SF, a 12 watt 4-inch All CCT slim profile square flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for damp location and use in soffits.

Beam Spread

- 110 degree beam spread

LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
- includes a 12" cable from driver to fixture

Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring

Operating Temperature

- -20°C - 40°C (-4°F - 104°F)

Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

LED Characteristics

- 12-Watt LED Module
- Minimal heat emission
- Up to 800 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

SPECIFICATION

| Application | Ceiling Recess Mount | Energy Star | YES |
|-------------------|----------------------------|-----------------|--------------------------|
| Approved Location | Damp | Input | 100-125V AC, 60Hz, 0.09A |
| Beam Angle | 110 | LM 79 | YES |
| CTT | 3000K, 4000K, 5000K in one | LM 80 | YES |
| Certification | cETLus | Lumens | 800 |
| Class II | YES | Lumens per Watt | 66.67 |
| Color | White/Black/Brushed Nickel | Power Factor | >0.95 |
| CRI | 80+ | Projected Life | 5 Years |
| Dimming | YES | Wattage | 12 Watt |
| Dimming Tech | TRIAC/ELV | Cut-Size | 4 1/4" |

