


# DRFP5524-4K/5K

2x4 LED Wide Voltage Panel Light

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Name		
Notes		

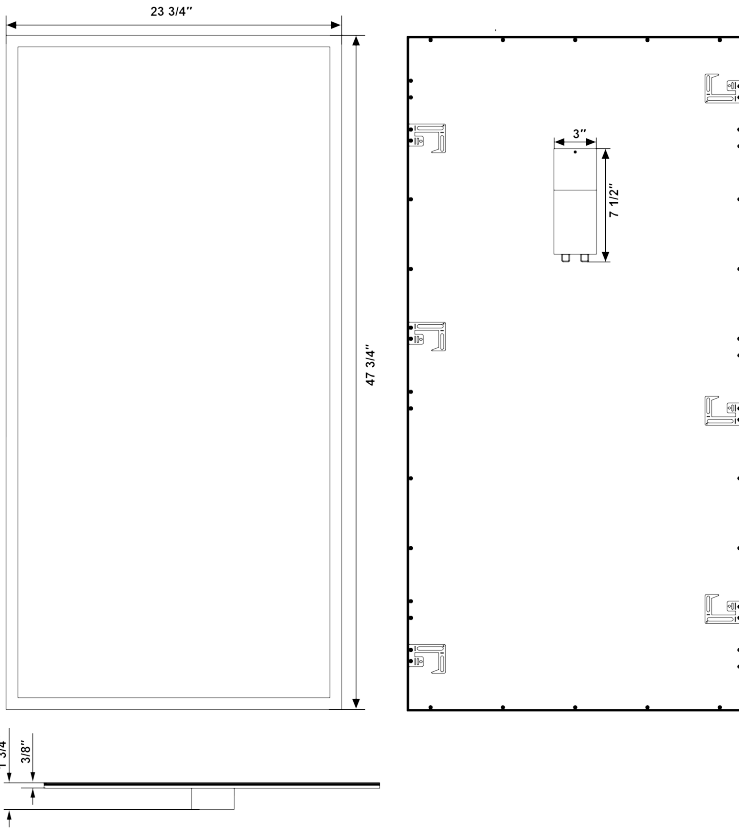

## Dimming

100%-10% dimming capability. This fixture is compatible with industry standard 0-10V dimmer.

## LED Characteristics

Bright LED modules that maintains uniform intensity producing up to 5,300 lumens\*; with a typical CRI of 80+. Available in 4000K or 5000 K colour temperature.e

## Description

The LED panel lights are designed to provide an optimal and modern alternative from traditional troffers. Elegantly designed for uniform light across the entire panel with low glare and shadows. Suitable for use in commercial and residential applications

## LED Driver

DawnRay proprietary driver technology available in 120-277V and 347V, 50/60Hz input. Driver power factor is 0.95 min with less than 20% THD. cULus listed Class 2 Class P driver enclosed with four 1/2" trade knockouts suitable for branch wiring (2 in and 2 out) #12 AWG.

## Mounting

Easy mounting in T-bar ceilings with standard dimensions of 2x2.

## Warranty

5 years warranty.

## Operating Temperature

-20°C - 40°C (-4°F - 104°F)

## SPECIFICATION

Application	Drop-Ceiling/Recessed/Surface	DLC	YES
Approved Location	Damp	Input	100-347V AC, 60Hz, 0.09A
Beam Angle	120	LM 79	YES
CTT	4000K/5000K	LM 80	YES
Certification	cETLus	Lumens	5,300
Class II	YES	Lumen Maintenance Factor	70%
Color	White	Power Factor	>0.95
CRI	80+	Projected Life	>50,000 hrs
Dimming	YES	Wattage	50 Watt
Dimming Tech	0-10V	Efficacy(Lm/W)	110Lm/W

