


# DR40RF-WH/BK/SN

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Name		
Notes		

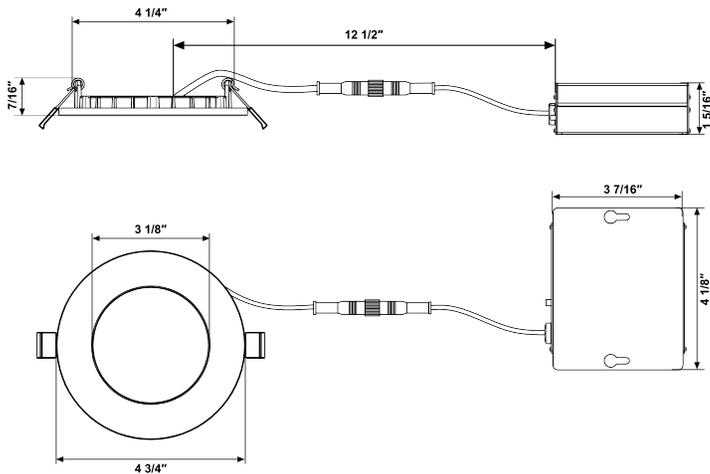

## Dimming

- 10%-100% dimming capability
- Compatible with industry TRIAC/ELV dimmers (contact factory for listing of compatible dimmers)

## Environment

- Suitable for damp locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

## Mounting

- Included two spring loaded clips to attach to any ceiling material
- The slim profile allows to be mounted under joists or dock work

## Description

- DR40RF, a 12 watt 4-inch All CCT slim profile round flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency and streamlined design. Suitable for damp location and use in soffits.

## Beam Spread

- 110 degree beam spread

## LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
- includes a 12" cable from driver to fixture

## Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring

## Operating Temperature

- -20°C - 40°C (-4°F - 104°F)

## Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

## LED Characteristics

- 12-Watt LED Module
- Minimal heat emission
- Up to 750 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

## SPECIFICATION

Application	Ceiling Recess Mount	Energy Star	YES
Approved Location	Damp	Input	100-125V AC, 60Hz, 0.09A
Beam Angle	110	LM 79	YES
CTT	3000K, 4000K, 5000K in one	LM 80	YES
Certification	cETLus	Lumens	750
Class II	YES	Lumens per Watt	62.5
Color	White/Black/Brushed Nickel	Power Factor	>0.95
CRI	80+	Projected Life	5 Years
Dimming	YES	Wattage	12 Watt
Dimming Tech	TRIAC/ELV	Cut-Size	4-1/4"


 NVC International Inc.  
 3833 Midland Ave Unit 21  
 Scarborough M1V 5L6

Cell: 647-887-3682 Email: info@nvcled.ca  
 Tel: 647-350-8898 Website: www.nvcled.ca

