





SALES@SP1FITTINGS.COM

SP1FITTINGS.COM

ELECTROFUSION 90° ELBOWS

IPS • SDR11 • Dimensions in millimetres and inches

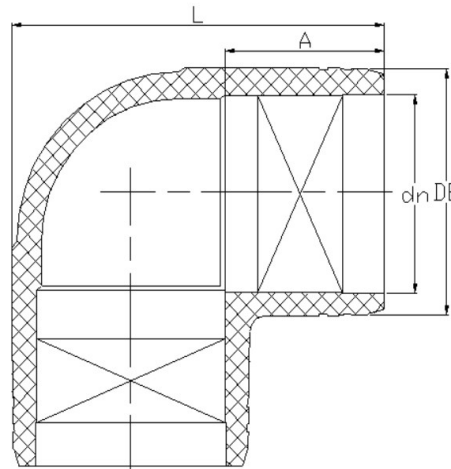

Nominal Size (IPS)	WEIGHT (kg/lbs.)	A (mm/inch)	L (mm/inch)	DE (mm/inch)	Part Number
1" × 90°	0.074 kg 0.16 lb.	39 mm 1.535"	78 mm 3.071"	42 mm 1.654"	EF9001011
2" × 90°	0.291 kg 0.64 lb.	51 mm 2.008"	124 mm 4.882"	76 mm 2.992"	EF9002011
3" × 90°	0.714 kg 1.57 lb.	65 mm 2.559"	168 mm 6.614"	108 mm 4.252"	EF9003011
4" × 90°	1.350 kg 2.98 lb.	73 mm 2.874"	205 mm 8.071"	138 mm 5.433"	EF9004011
6" × 90°	4.000 kg 8.82 lb.	93 mm 3.661"	288 mm 11.339"	206 mm 8.110"	EF9006011
8" × 90°	8.033 kg 17.71 lb.	105 mm 4.134"	353 mm 13.898"	265 mm 10.433"	EF9008011

- Pop-up fusion indicators for a successful weld
- Molded and manufactured in accordance and to meet and exceed PE3608, PE4710, and PE100 Resin Specifications - AWWA F714, F1055, D2513, D3035, D3350, C901/906, NSF/ANSI61 standards and specifications
- Rated for water/gas at 200psi at 73.40°F (23°C) with a minimum 50-year design life, depending on application.
- Also available in Metric Sizes by special order