

Digital Dental Intraoral X-ray Sensor

# PortView



The PortView are CMOS area image sensors developed for X-ray imaging.

CMOS area image sensors

USB interface type

Monitoring photodiode

Waterproof

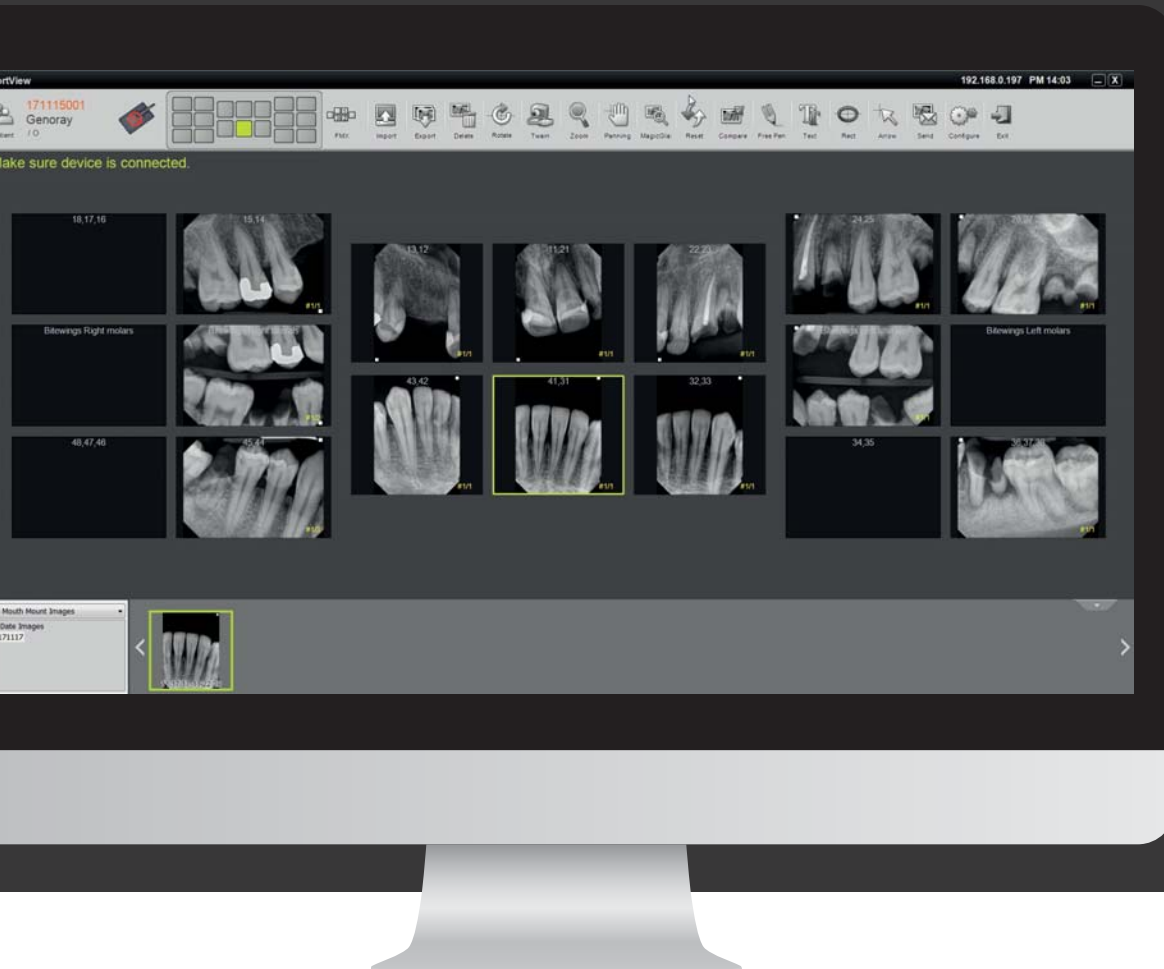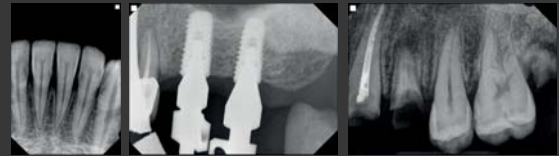


# PortView

The PortView are CMOS area image sensors developed for X-ray imaging.



## CMOS area image sensors for X-ray imaging (USB interface type)

The PortView are CMOS area image sensors developed for X-ray imaging. These image sensors have 1.5 mega pixels (1,000 x 1,500) with a pixel size of 20x20 um and a monitoring photodiode for monitoring and detecting X-ray irradiation. FOP (fiber optic plate) used as the input window ensures high image quality and long sensor life even under exposure to X-rays. The PortView supports USE 2.0. Two types are available with different scintillators used. The PortView is designed to be dust and water proof, equivalent of IP67

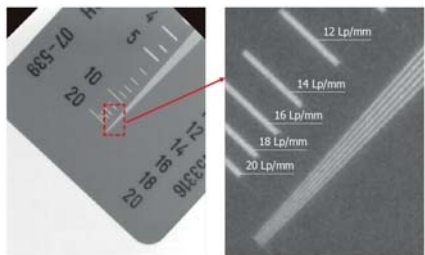

SPECIFICATIONS	SIZE 1	SIZE 2
Image size (HxV)	26 x 34mm	20 x 30mm
Number of total pixels (HxV)	1,300 x 1,706 pixels	1,000 x 1,506 pixels
Number of effective pixels (HxV)	1,300 x 1,700 pixels	1,000 x 1,500 pixels
Number of light-shielded pixels	Upper part : 756,758,760 pixel Lower part : 1,300 x 3 pixel	Upper part : 766,768,770 pixel Lower part : 1,000 x 3 pixel
Pixel Size	20x20 um	
Pixel pitch (HxV)	20 um	
Scintillator type	CsI(Tl)	
Interface	USB 2.0	

## Features

- Pixel size : 20x20 um
- High resolution : 20 Lp/mm typ
- Dynamic range : 57 dB (size1) / 75 dB (size2)
- USB 2.0 interface
- Waterproof : equivalent of IP67

## \* Monitoring photodiode

The monitoring photodiode is arranged along the entire circumference of the effective pixel area and this will monitor dose rates. when you get an image, if the output of the monitoring photodiode gets higher than a certain threshold, you can get an image automatically.

