


## 4.1-Tactical Quick Guide

### Moving the brake up and down the rope


- set the friction mode to 50kg. (1)
- move the neutral button down. (2)
- Press the handle inn. (3)
- Hold the handle in while moving the rope through the device.

TIP! When moving the brake up the rope, point the top of the brake towards the rope for easier movement.

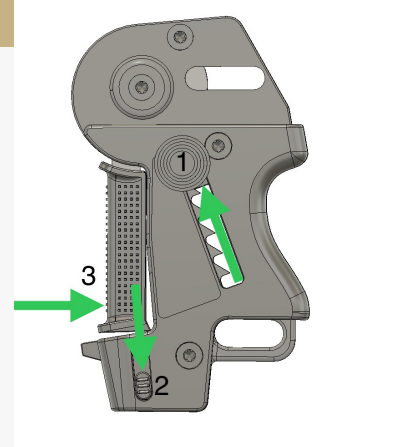

### Edge transition

- Set friction mode to 50kg.
- Use your hand on the braking side of the rope in combination with the brake handle to transition into position.

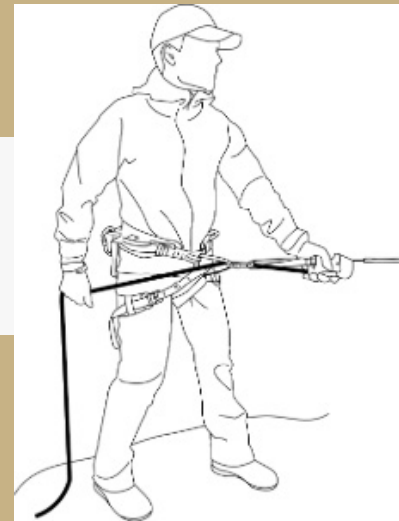

### Rappelling

When the operator is in position and has bodyweight on the system:

- set the friction mode to the desired setting.  
(When using PETZL Asap as a backup for training purpose, set the friction mode -10/-20kg lighter than the body weight)
- The friction mode can be adjusted any time during the rappel while descending at speed or at stand still.
- The use of friction mode is optional but gives the operator superior handle characteristics and speed control.
- Use 2 fingers on the handle to control the speed of the decent.

