




PERMANENT LINEAR SHRINKAGE

OF THERMAL TECH & TEMP INSULATION

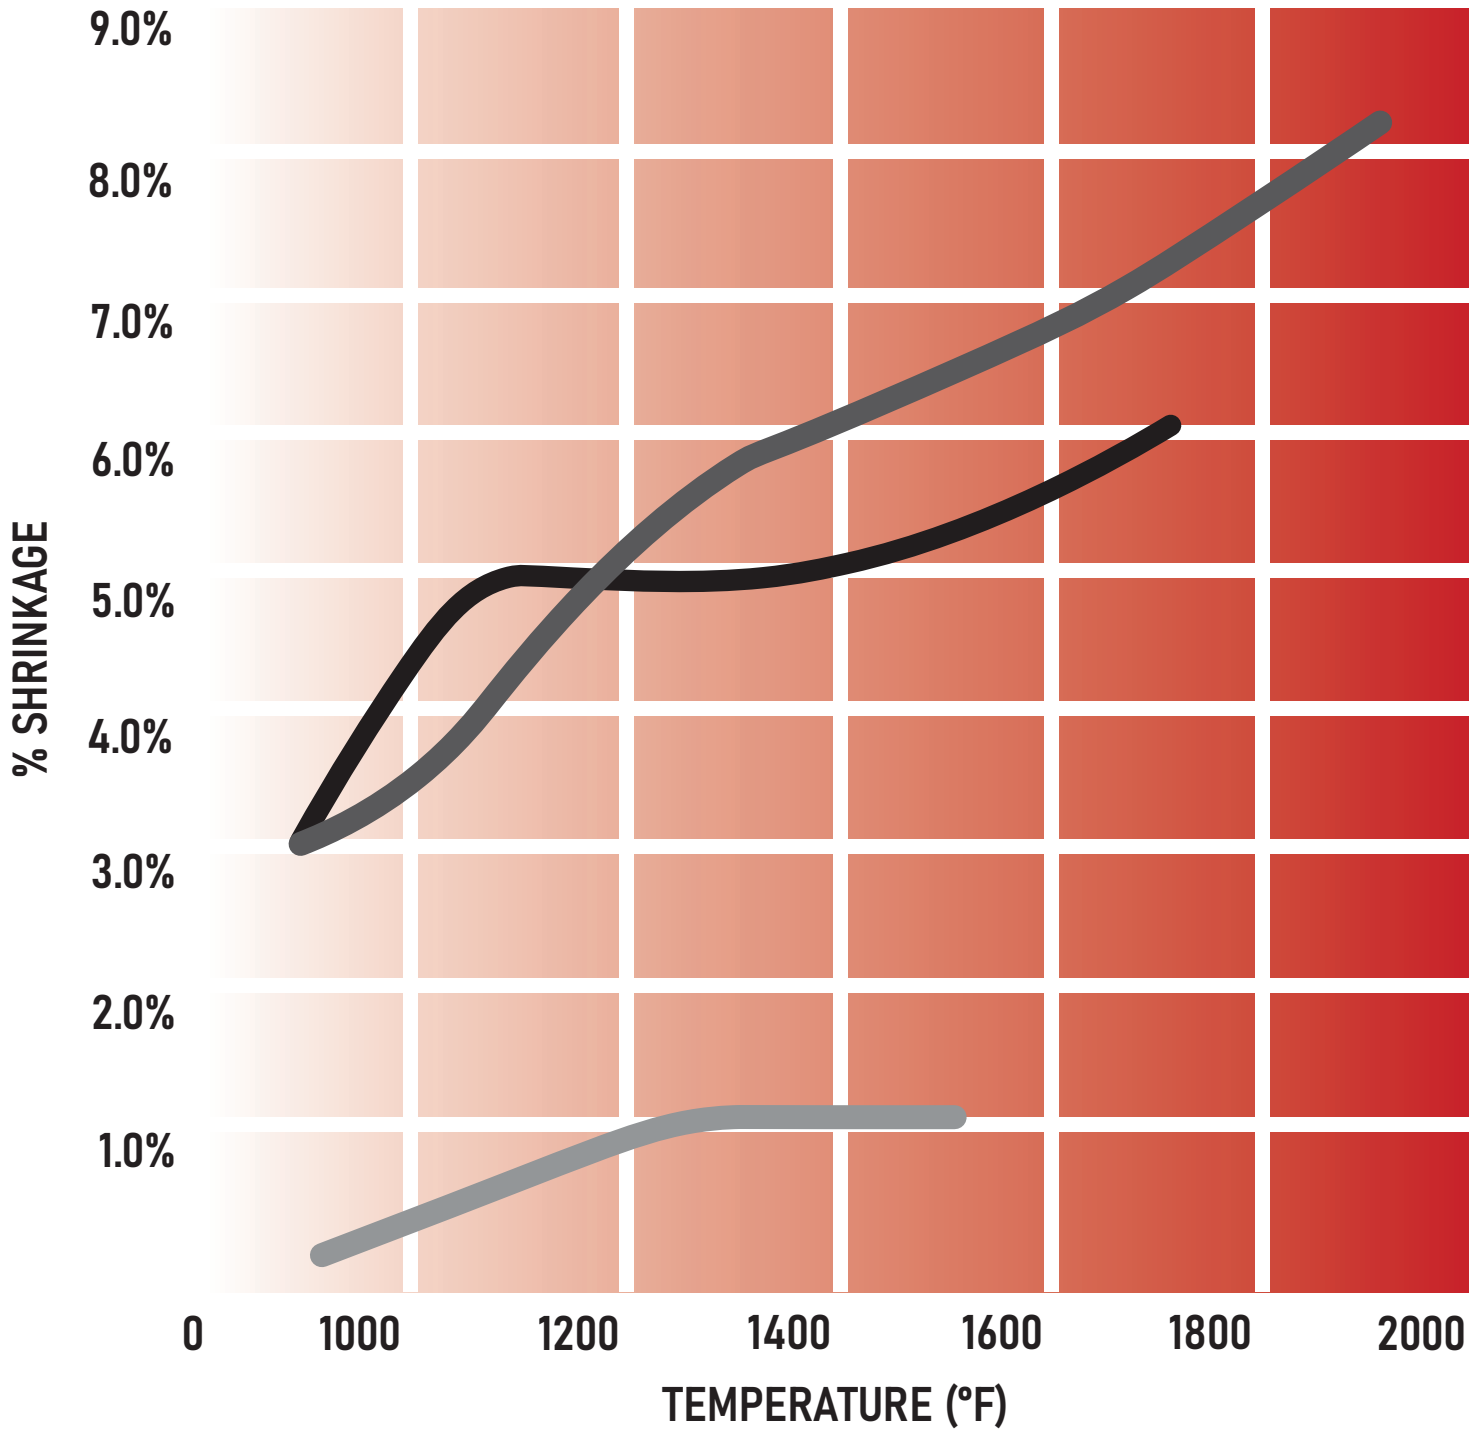

- **E-GLASS NEEDED MAT:** A CONTINUOUS FILAMENT FIBER BLANKET, RECOMMENDED FOR 1500 °F MAX
- **THERMASIL NEEDED MAT:** 100 AMORPHOUS SILICA FIBER BLANKET, RECOMMENDED FOR 1800 °F +
- **SOLUBLE FIBERS:** A BLEND OF BASALT AND AMORPHOUS SILICA FIBER BLANKET, RECOMMENDED FOR 1800 °F MAX