


BEAMLINE



LIGHT YOUR WORLD

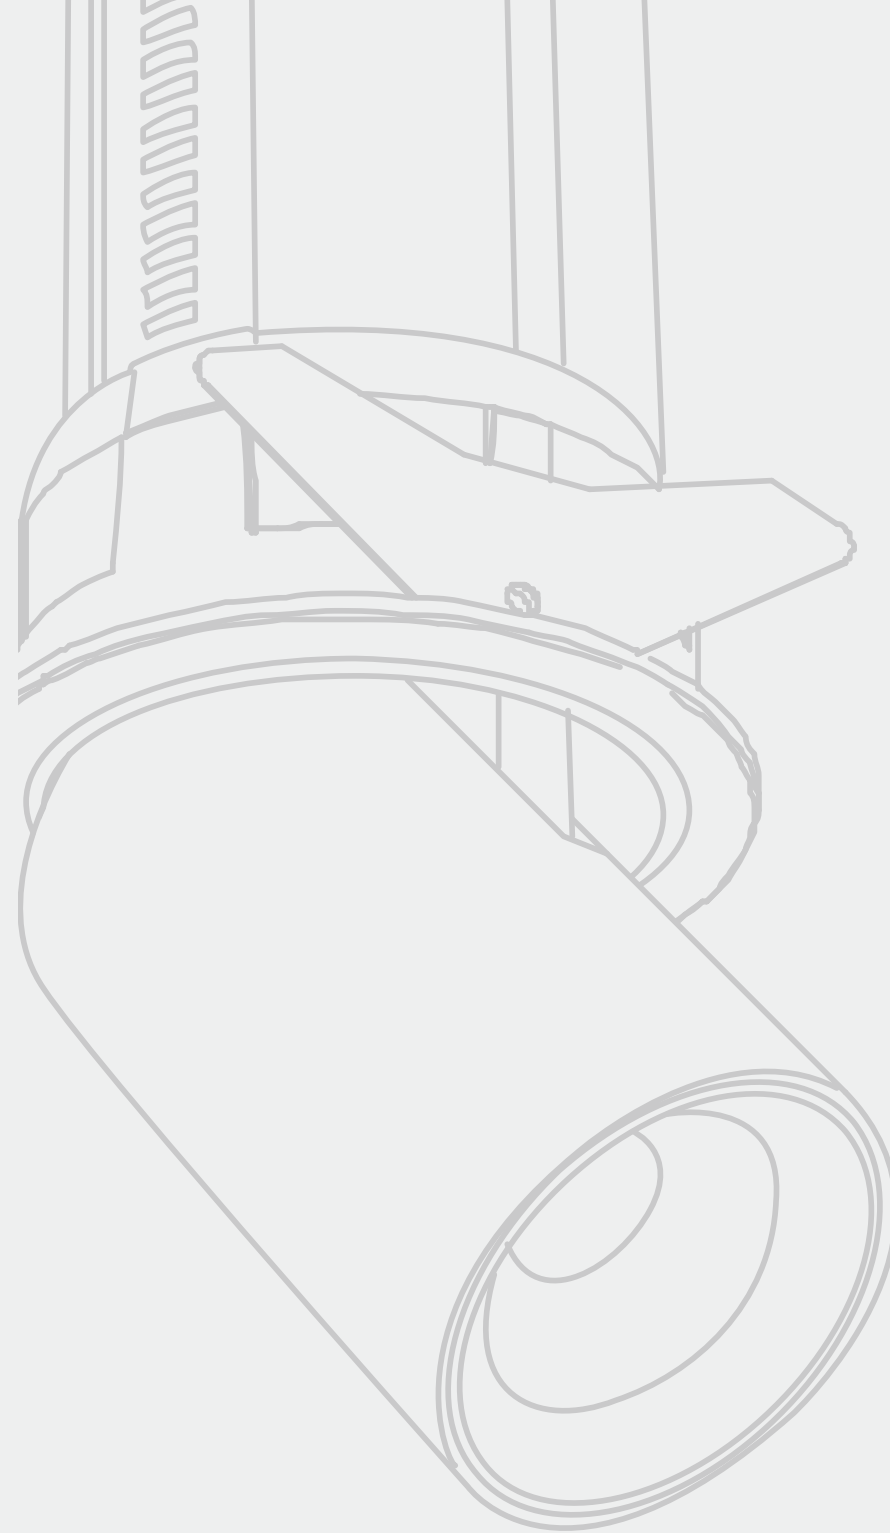

WELCOME
TO
OUR
WORLD

Beam Line Light Fitting Trading L.L.C was established in 2025 we are an innovative enterprise specializing in the *Supply* of die-cast led indoor lights. our products include indoor LED downlights, LED ceiling lights, LED wall washers, LED track lights, etc., products widely used in airport terminals, high-speed railway stations, high-end commercial real estate, villa clubs, high-end hotels, museums, exhibition spaces and other fields.

From the beginning of *Beam Line* establishment, *it* has been recognized by the industry for its integrity,strength and high-quality product quality,and continues to develop and innovate to meet people's higher demand for light environment.



PRODUCT OVERVIEW



01-24 COB Waterproof wall washer




24-40 WANS SERIES COB PENCUCI DINDING




41-48 WANIE SERIES COB LAMPU PEREGANGAN




49-58 WANEL SERIES COB LAMPU MATA BANTENG

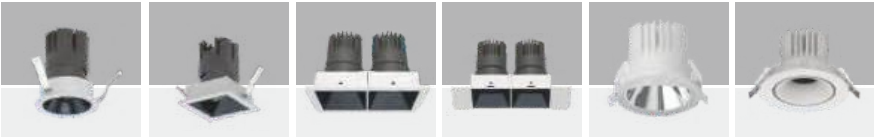

63 Hotel focus 64 Hotel focus 65 Hotel focus 66 Hotel focus 68 COB polarized downlight 68 COB spotlight

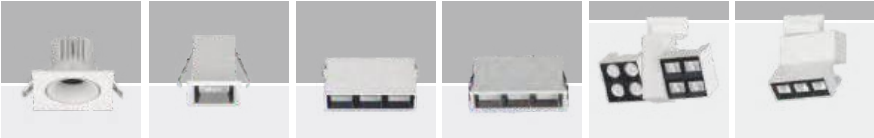

70 Grille light 72 Embedded line light 73 Trimless Linear Light 74 Embedded line light 75 Linear guide lights 76 Linear guide lights

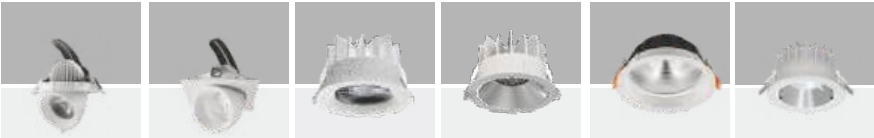

77 Elephant Trunk Light 78 Grille light 79 Recessed Anti-glare Downlight 81 Recessed Anti-glare Downlight 82 Recessed Anti-glare Downlight 83 Recessed Anti-glare Downlight



84 Recessed Anti-glare Downlight 85 Anti-glare Surface Mounted Downlight 86 Anti-glare Surface Mounted Downlight 88 Anti-glare Surface Mounted Downlight 90 Waterproof surface mounted downlight 92 Waterproof wall light



93 Track Light 94 Focusing track light series 95 Polarized rail light series

specially designed for high end hotel,club,villa & Residence,



COB Waterproof wall washer

Versatile design

Different installation ways, clear installation manual




Modular design

tools-free installation and maintenance and other details



Unique Style

hape,optics,module,painting details

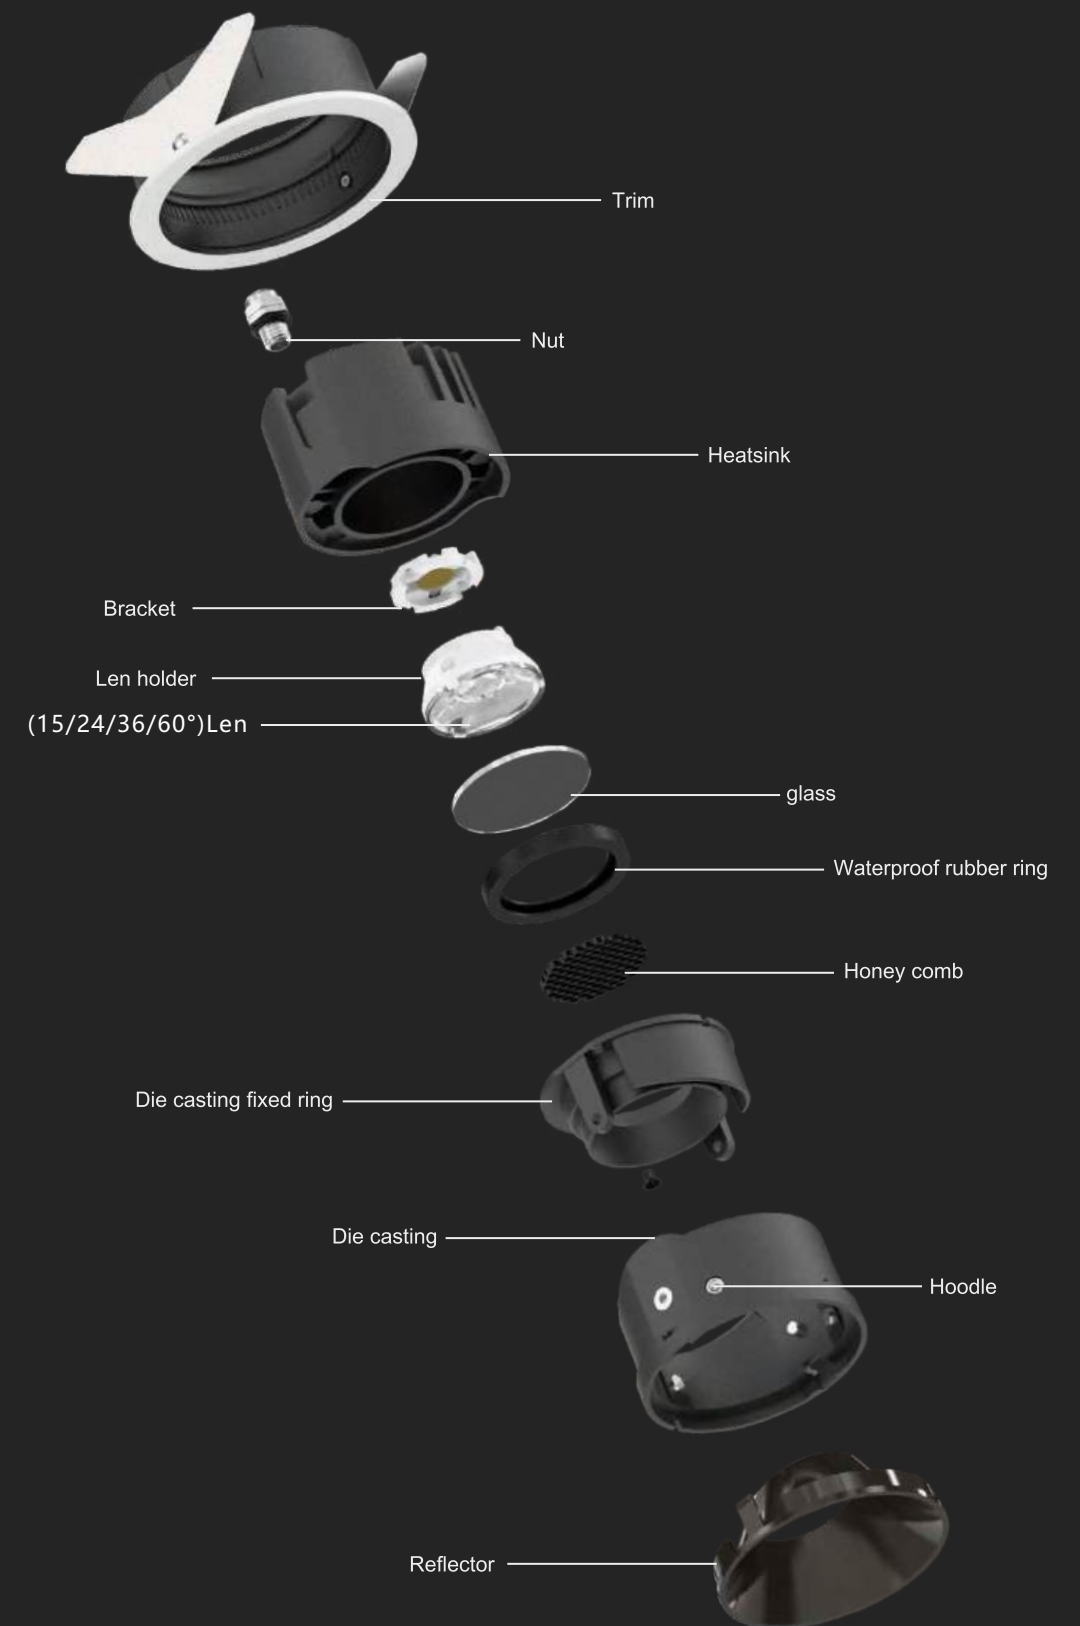




Two styles


The conventional model is small and dainty, suitable for engineering retrofitting

High-style small size high power, the application of more scope

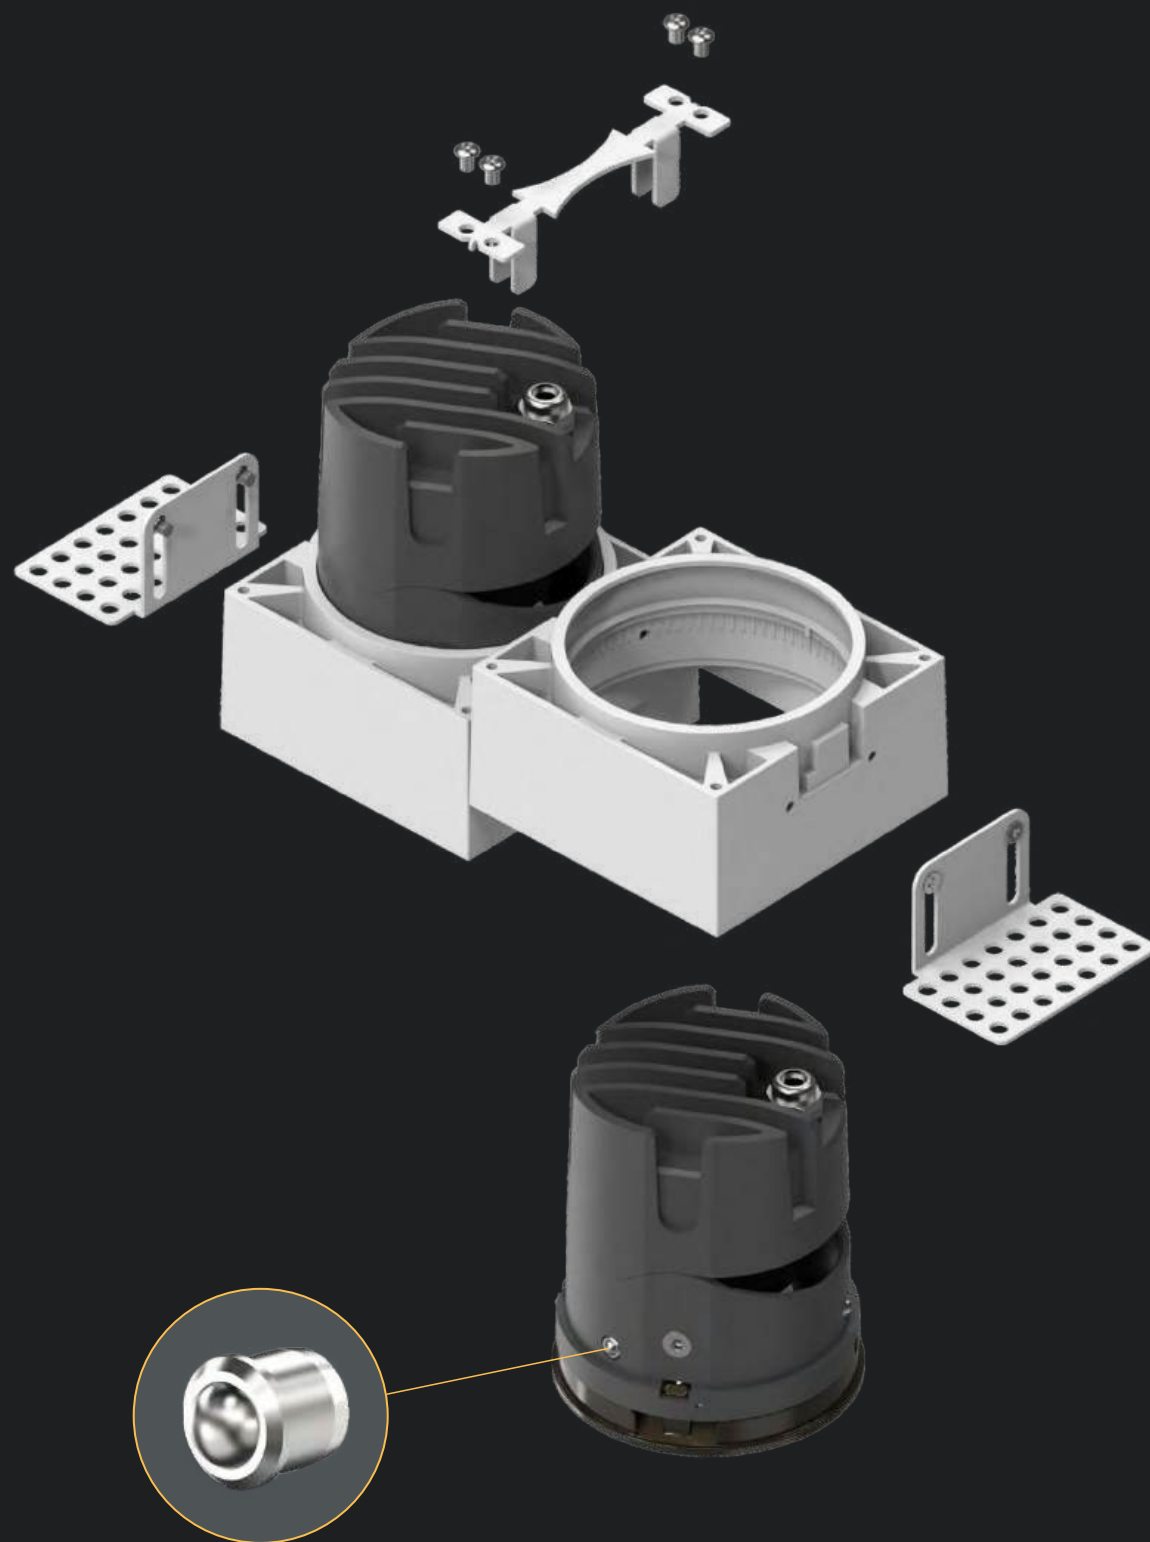


Structural design of marbles? Button module

With hoodle design, easily to remove module for replacement

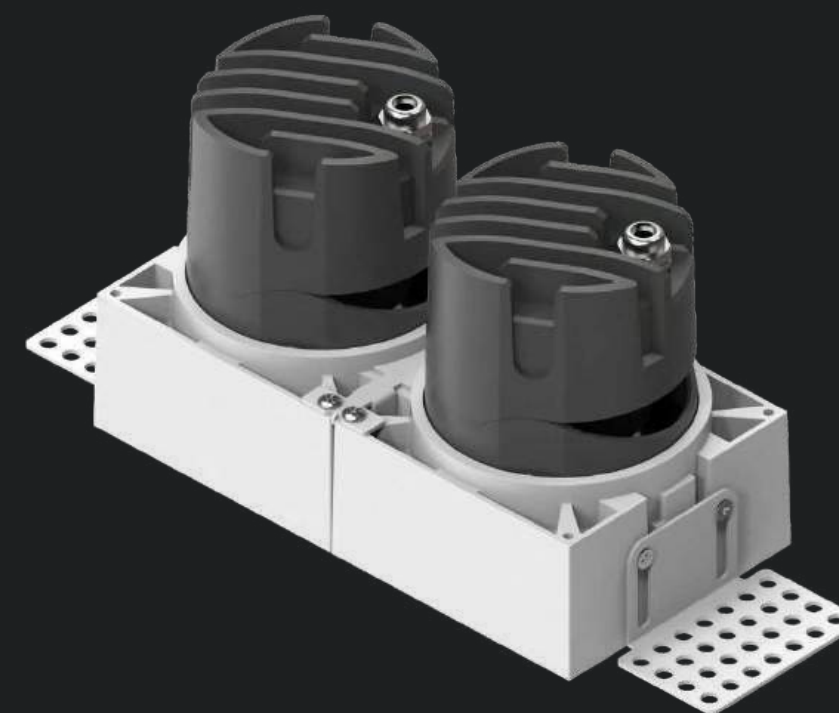

Changeable combination application

The flexible product combination can fulfill the different requirements in different function areas of the hotel in maximum

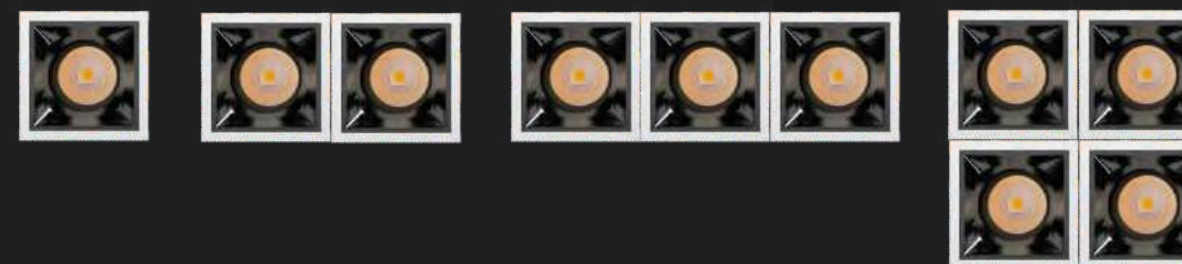



The interior of the lamp body is fully sealed waterproof structure design


Multiple waterproof design, widely used in shower room, kitchen\$






FBS-WF323

Beam Angle 15/24/36/60°
Size $\Phi 62 \times 70$
Power 7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG323

Beam Angle 15/24/36/60°
Size $\Phi 62 \times 85$
Power 10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF324

Beam Angle 15/24/36/60°
Size $\Phi 84 \times 80$
Power 12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG324

Beam Angle 15/24/36/60°
Size $\Phi 84 \times 110$
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF325

Beam Angle 15/24/36/60°
Size $\Phi 105 \times 110$
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG325

Beam Angle 15/24/36/60°
Size $\Phi 105 \times 130$
Power 30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF323-1

Beam Angle 15/24/36/60°
Size 64*64*78
Power 7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF324-1

Beam Angle 15/24/36/60°
Size 85*85*91
Power 12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF325-1

Beam Angle 15/24/36/60°
Size 105*105*126
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG323-1

Beam Angle 15/24/36/60°
Size 64*64*93
Power 10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG324-1

Beam Angle 15/24/36/60°
Size 85*85*121
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG325-1

Beam Angle 15/24/36/60°
Size 105*105*146
Power 30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-C-WF323

Beam Angle 15/24/36/60°
Size 130*69*75
Power 2*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-C-WG323

Beam Angle 15/24/36/60°
Size 130*69*90
Power 2*10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-C-WF324

Beam Angle 15/24/36/60°
Size 180*91*91
Power 2*12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-C-WG324

Beam Angle 15/24/36/60°
Size 180*91*121
Power 2*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-C-WF325

Beam Angle 15/24/36/60°
Size 224*110*122
Power 2*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-C-WG325


Beam Angle 15/24/36/60°
Size 224*110*142
Power 2*30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40






FBS-T-WF323

Beam Angle	15/24/36/60°
Size	140*79*75
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG323

Beam Angle	15/24/36/60°
Size	140*79*90
Power	2*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WF324

Beam Angle	15/24/36/60°
Size	194*104*91
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG324

Beam Angle	15/24/36/60°
Size	194*104*121
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WF325

Beam Angle	15/24/36/60°
Size	239*125*122
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG325

Beam Angle	15/24/36/60°
Size	239*125*142
Power	2*30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF323 Boundless

Beam Angle	15/24/36/60°
Size	75*70
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF324 Boundless

Beam Angle	15/24/36/60°
Size	95*80
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF325 Boundless

Beam Angle	15/24/36/60°
Size	115*110
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG323 Boundless

Beam Angle	15/24/36/60°
Size	75*85
Power	10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG324 Boundless

Beam Angle	15/24/36/60°
Size	95*110
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG325 Boundless

Beam Angle	15/24/36/60°
Size	115*130
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF323-1 Boundless

Beam Angle	15/24/36/60°
Size	54*54*78
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG323-1 Boundless

Beam Angle	15/24/36/60°
Size	54*54*93
Power	10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF324-1 Boundless

Beam Angle	15/24/36/60°
Size	74*74*91
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG324-1 Boundless

Beam Angle	15/24/36/60°
Size	74*74*121
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF325-1 Boundless

Beam Angle	15/24/36/60°
Size	94*94*126
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-WG325-1 Boundless


Beam Angle	15/24/36/60°
Size	94*94*146
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-WF323 Boundless

Model	
Size	116*55*75
Power	2*7W
CCT	
Input volt.	
CRI	
IP Rating	




FBS-C-WG323 Boundless

Beam Angle	15/24/36/60°
Size	116*55*90
Power	2*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-WF324 Boundless

Beam Angle	15/24/36/60°
Size	163*74*91
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-WG324 Boundless

Beam Angle	15/24/36/60°
Size	163*74*121
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-WF325 Boundless

Beam Angle	15/24/36/60°
Size	207*93*122
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-WG325 Boundless

Beam Angle	15/24/36/60°
Size	207*93*142
Power	2*30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WF323 Boundless

Beam Angle	15/24/36/60°
Size	126*65*70
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG323 Boundless

Beam Angle	15/24/36/60°
Size	126*65*90
Power	2*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WF324 Boundless

Beam Angle	15/24/36/60°
Size	177*87*91
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG324 Boundless

Beam Angle	15/24/36/60°
Size	177*87*121
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WF325 Boundless

Beam Angle	15/24/36/60°
Size	222*108*122
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-WG325 Boundless

Beam Angle	15/24/36/60°
Size	222*108*142
Power	2*30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF323-2

Beam Angle	15/24/36/60°
Size	117*64*78
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG323-2

Beam Angle	15/24/36/60°
Size	117*64*93
Power	2*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF324-2

Beam Angle	15/24/36/60°
Size	158*84*91
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG324-2

Beam Angle	15/24/36/60°
Size	158*84*121
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF325-2

Beam Angle	15/24/36/60°
Size	198*105*126
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-WG325-2


Beam Angle	15/24/36/60°
Size	198*105*146
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-WF323-3

Beam Angle 15/24/36/60°
Size 171*64*78
Power 3*7W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-WG323-3

Beam Angle 15/24/36/60°
Size 171*64*93
Power 3*10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF324-3

Beam Angle 15/24/36/60°
Size 232*85*91
Power 3*12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG324-3

Beam Angle 15/24/36/60°
Size 232*85*121
Power 3*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF325-3

Beam Angle 15/24/36/60°
Size 292*105*126
Power 3*20W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-WG325-3

Beam Angle 15/24/36/60°
Size 292*105*146
Power 3*30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF323-4

Beam Angle 15/24/36/60°
Size 117*117*78
Power 4*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF324-4

Beam Angle 15/24/36/60°
Size 158*158*91
Power 4*12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF325-4

Beam Angle 15/24/36/60°
Size 198*198*126
Power 4*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG323-4

Beam Angle 15/24/36/60°
Size 117*117*93
Power 4*10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG324-4

Beam Angle 15/24/36/60°
Size 158*158*121
Power 4*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG325-4

Beam Angle 15/24/36/60°
Size 198*198*146
Power 4*30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF323-2 Boundless

Beam Angle 15/24/36/60°
Size 108*54*78
Power 2*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF324-2 Boundless

Beam Angle 15/24/36/60°
Size 147*74*91
Power 2*12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WF325-2 Boundless

Beam Angle 15/24/36/60°
Size 187*94*126
Power 2*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG323-2 Boundless

Beam Angle 15/24/36/60°
Size 180*54*93
Power 2*10W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-WG324-2 Boundless

Beam Angle 15/24/36/60°
Size 147*74*121
Power 2*20W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40



FBS-WG325-2 Boundless


Beam Angle 15/24/36/60°
Size 187*94*146
Power 2*30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40






FBS-WF323-3 Boundless

Beam Angle	15/24/36/60°
Size	162*54*78
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG323-3 Boundless

Beam Angle	15/24/36/60°
Size	162*54*93
Power	3*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF323-4 Boundless

Beam Angle	15/24/36/60°
Size	108*108*78
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG323-4 Boundless

Beam Angle	15/24/36/60°
Size	108*108*93
Power	4*10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF324-3 Boundless

Beam Angle	15/24/36/60°
Size	221*74*91
Power	3*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG324-3 Boundless

Beam Angle	15/24/36/60°
Size	211*74*121
Power	3*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF324-4 Boundless

Beam Angle	15/24/36/60°
Size	147*147*91
Power	4*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG324-4 Boundless

Beam Angle	15/24/36/60°
Size	147*147*121
Power	4*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF325-3 Boundless

Beam Angle	15/24/36/60°
Size	281*94*126
Power	3*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WG325-3 Boundless

Beam Angle	15/24/36/60°
Size	281*94*146
Power	3*30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-WF325-4 Boundless

Beam Angle	15/24/36/60°
Size	187*187*126
Power	4*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-WG325-4 Boundless


Beam Angle	15/24/36/60°
Size	187*187*146
Power	4*30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




VANZ SERIES COB PENCUCI DINDING






More Details

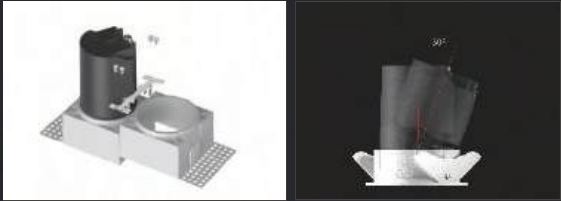


Product exploded view

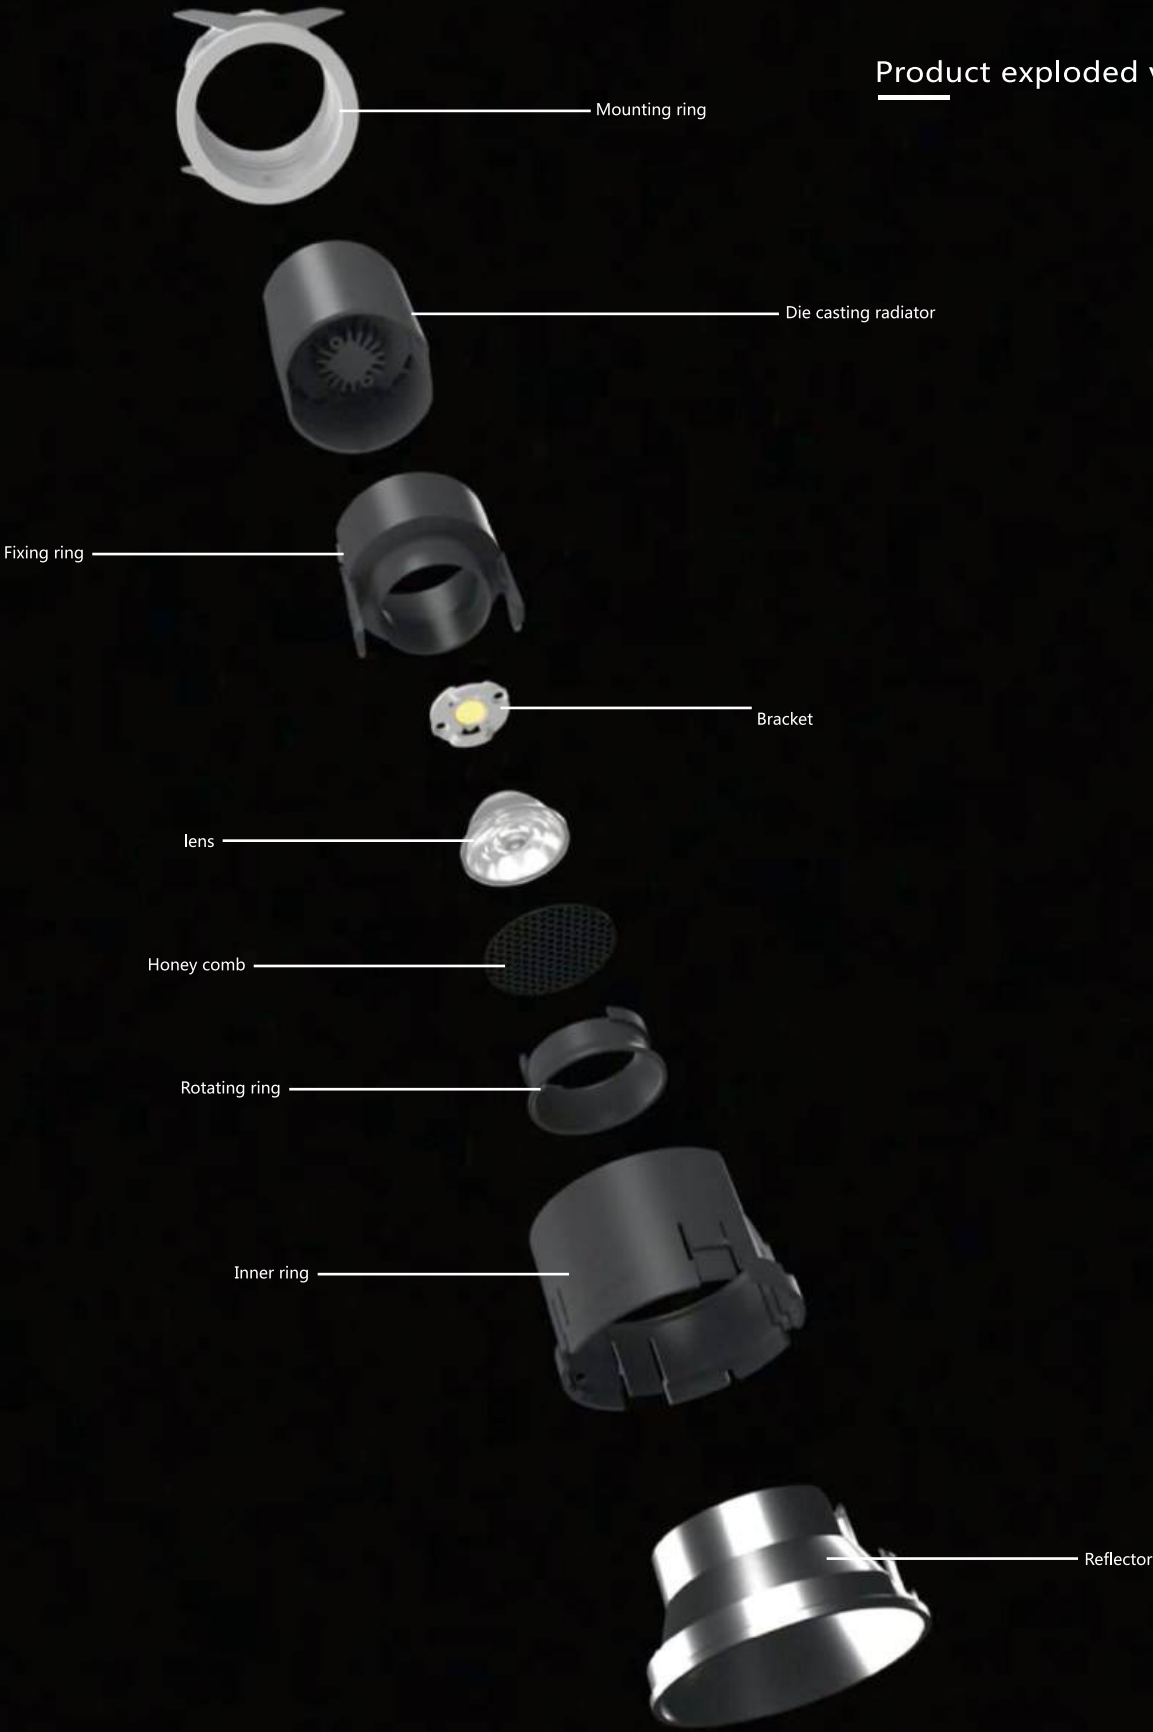

Vandecus Seri keluarga

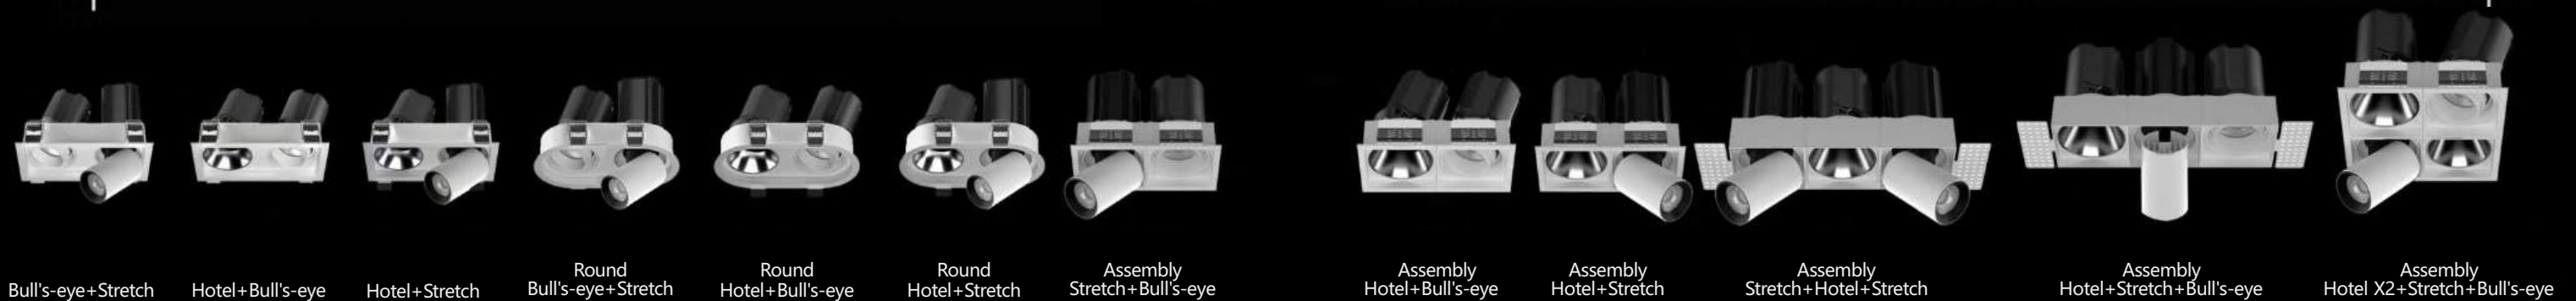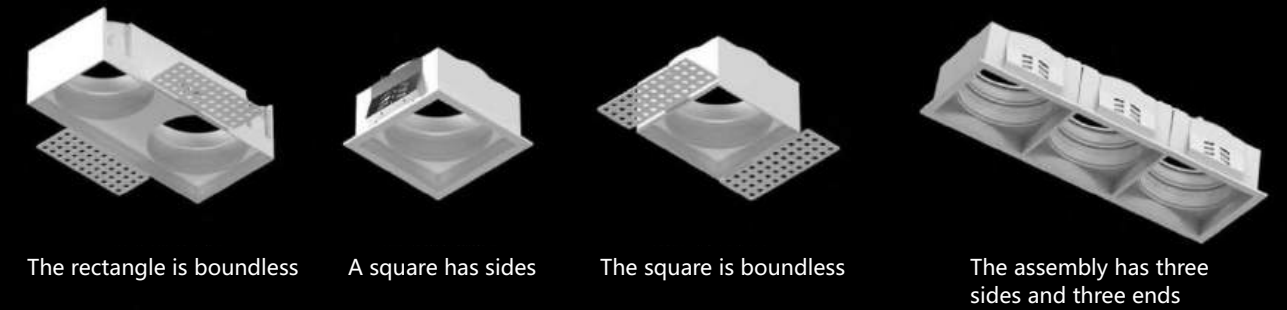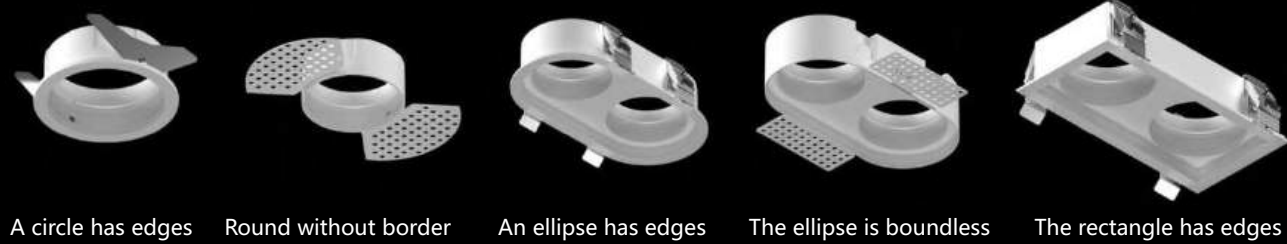

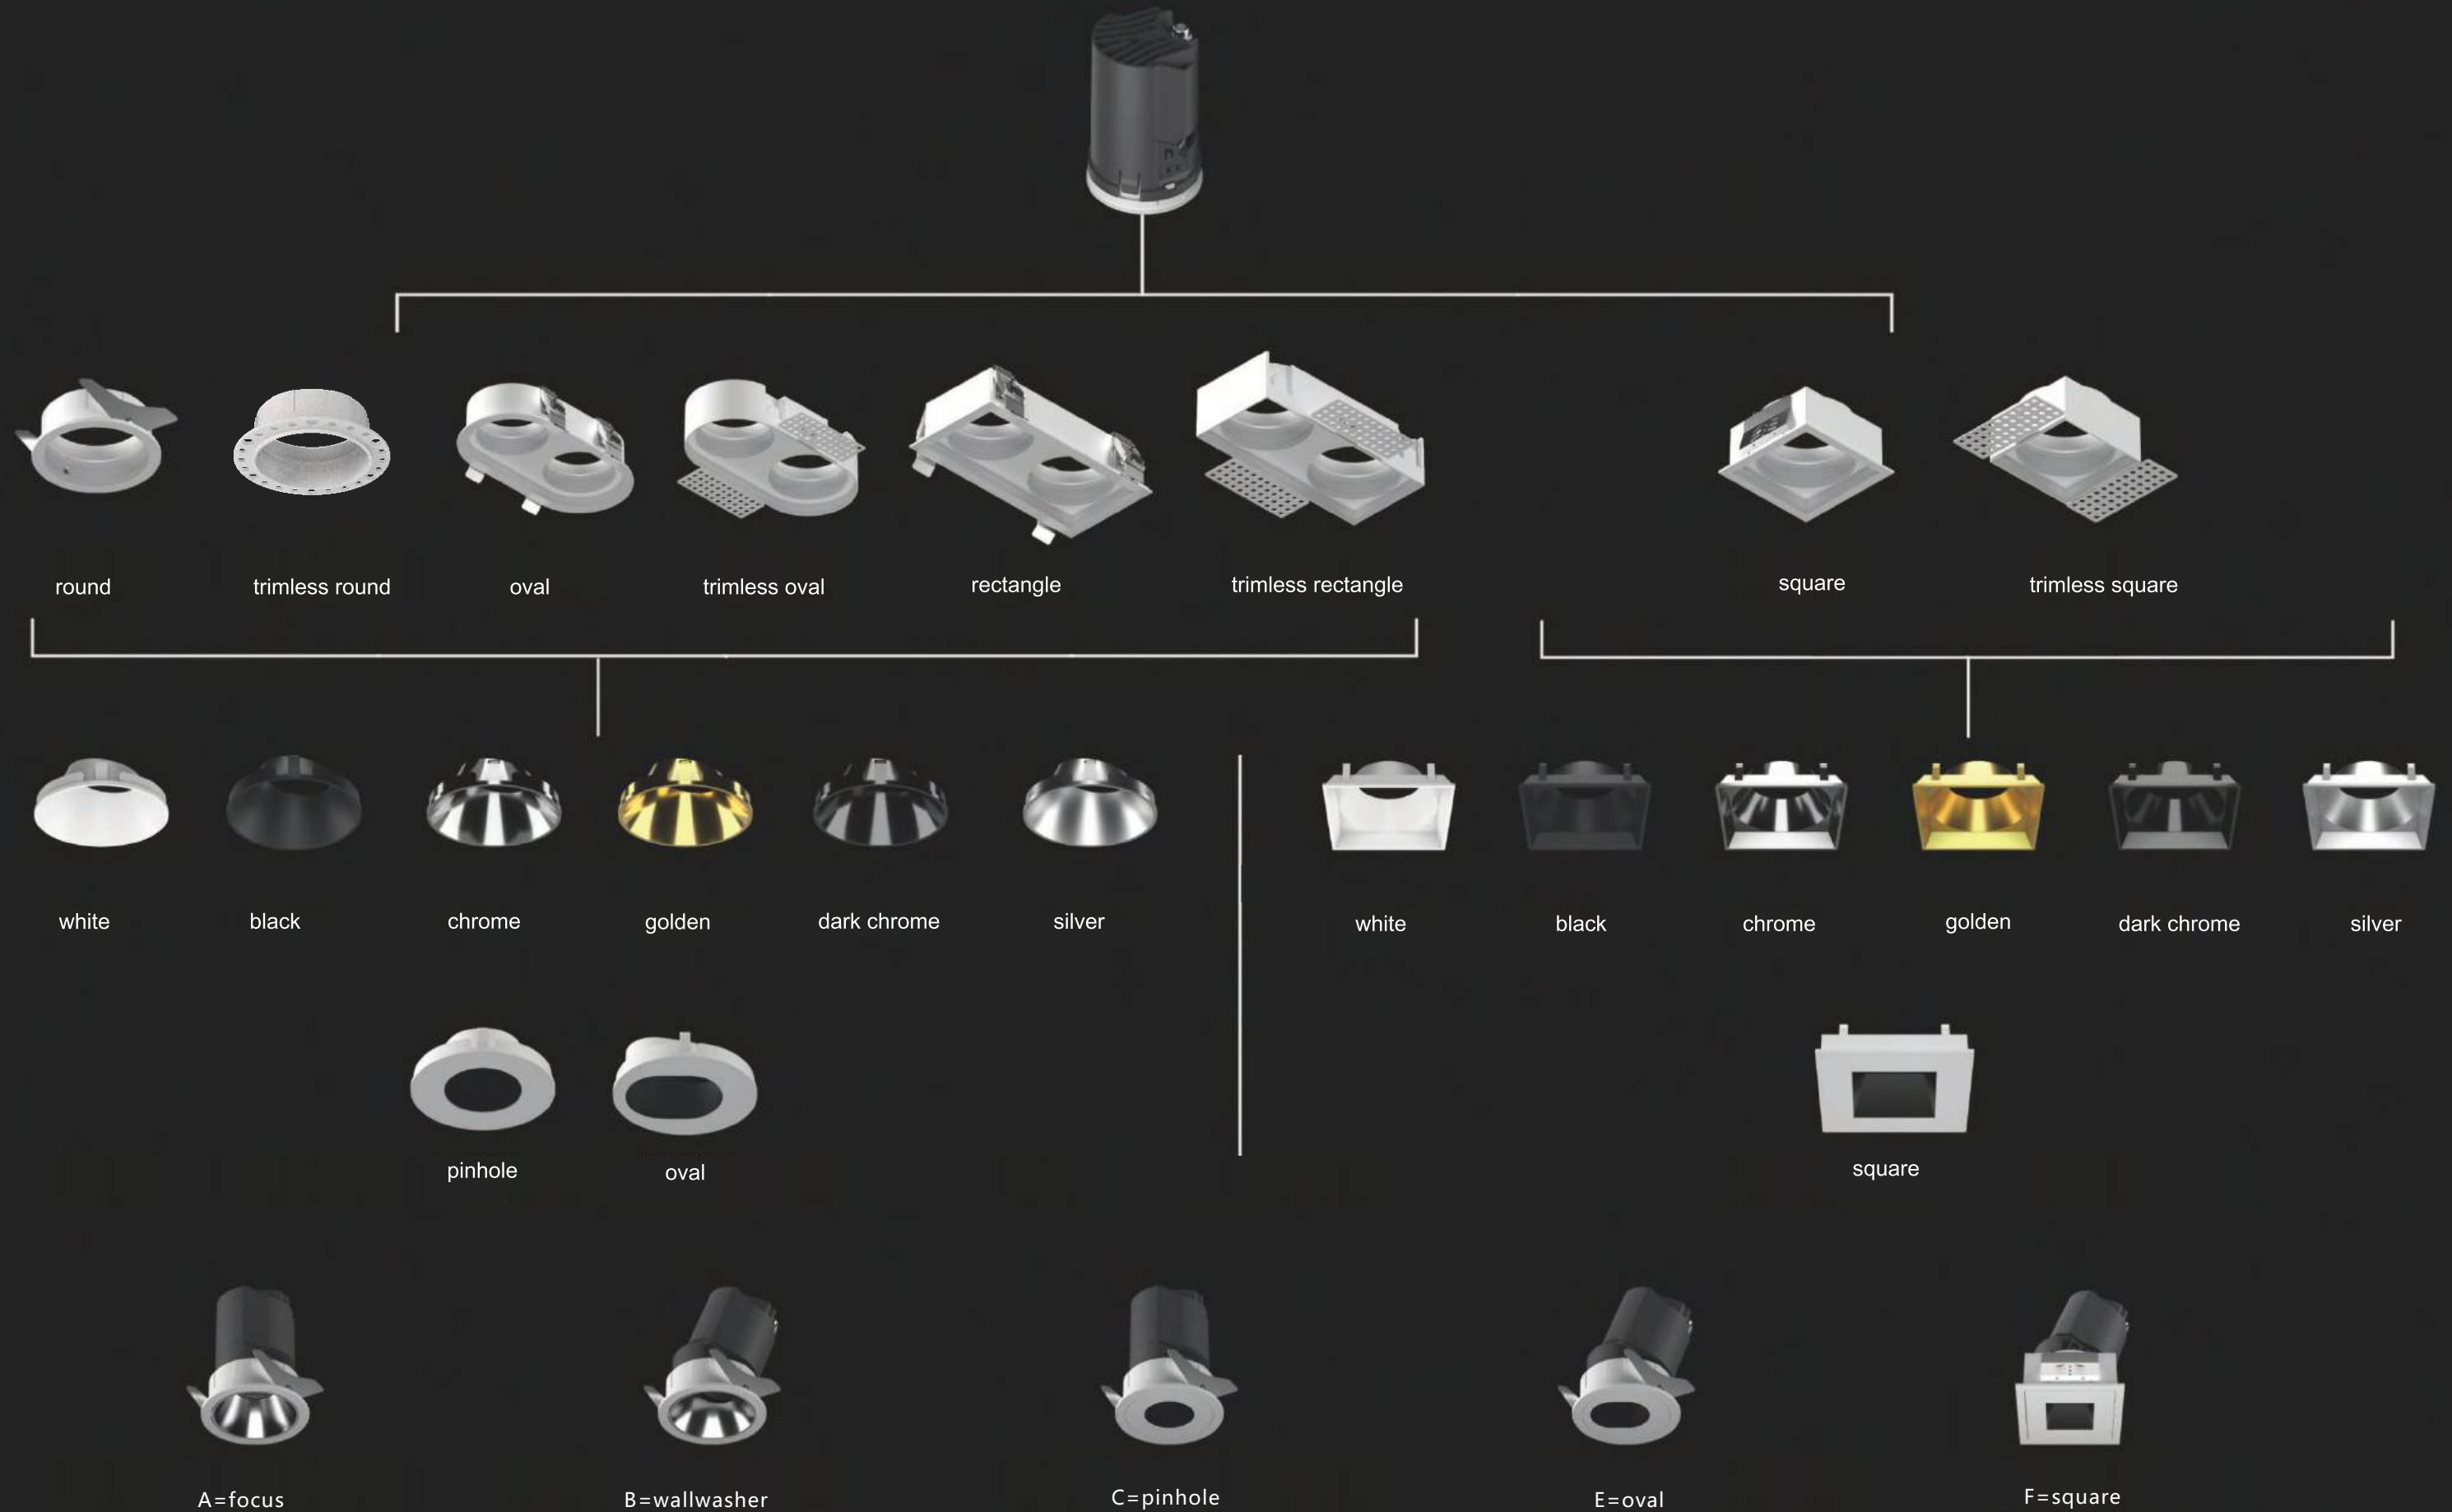




FBS-W323

Beam Angle 15/24/38/60°


Size	Φ 61.6
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W323

Beam Angle 15/24/38/60°


Size	Φ 139.5*78.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W323 Boundless

Beam Angle 15/24/38/60°


Size	Φ 75
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W323 Boundless

Beam Angle 15/24/38/60°


Size	Φ 125.5*64.6
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W324

Beam Angle 15/24/38/60°


Size	Φ 84
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W324

Beam Angle 15/24/38/60°


Size	Φ 193.3*104.3
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W324 Boundless

Beam Angle 15/24/38/60°


Size	Φ 95
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W324 Boundless

Beam Angle 15/24/38/60°


Size	Φ 176.9*87.4
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W325

Beam Angle 15/24/38/60°


Size	Φ 105
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W325

Beam Angle 15/24/38/60°


Size	Φ 238.5*124.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W325 Boundless

Beam Angle 15/24/38/60°


Size	Φ 115
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-W325 Boundless

Beam Angle 15/24/38/60°


Size	Φ 221.5*107.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W323-1

Beam Angle	15/24/38/60°
Size	63.5*63.5
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-W323

Beam Angle	15/24/38/60°
Size	129.5*68.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-1 Boundless

Beam Angle	15/24/38/60°
Size	53.8*53.8
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-W323 Boundless

Beam Angle	15/24/38/60°
Size	115.5*54.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-1

Beam Angle	15/24/38/60°
Size	84.5*84.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-W324

Beam Angle	15/24/38/60°
Size	180*90.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-1 Boundless

Beam Angle	15/24/38/60°
Size	73.5*73.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-W324 Boundless

Beam Angle	15/24/38/60°
Size	163*73.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-1

Beam Angle	15/24/38/60°
Size	104.5*104.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-C-W325

Beam Angle	15/24/38/60°
Size	223.5*109.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-1 Boundless

Beam Angle	15/24/38/60°
Size	93.5*93.5
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-C-W325 Boundless

Beam Angle	15/24/38/60°
Size	207.4*93.4
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




According to the lighting effect, face ring can choose a variety of styles of light effect each face ring has its own unique light effect




FBS-W323-2

Beam Angle	15/23/38°
Size	117.3*63.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-2 Boundless

Beam Angle	15/23/38°
Size	107.6*53.8
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-3

Beam Angle	15/23/38°
Size	171.1*63.5
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-3 Boundless

Beam Angle	15/23/38°
Size	161.5*53.8
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-4

Beam Angle	15/23/38°
Size	117.3*117.3
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-4 Boundless

Beam Angle	15/23/38°
Size	107.6*107.6
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-2

Beam Angle	15/23/38°
Size	158*84.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-2 Boundless

Beam Angle	15/23/38°
Size	147*73.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-3

Beam Angle	15/23/38°
Size	231.5*84.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-3 Boundless

Beam Angle	15/23/38°
Size	220.5*73.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-4

Beam Angle	15/23/38°
Size	158*158
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-4 Boundless

Beam Angle	15/23/38°
Size	147*147
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-2

Beam Angle	15/23/38°
Size	198*104.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-2 Boundless

Beam Angle	15/23/38°
Size	187.2*93.6
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-3

Beam Angle	15/23/38°
Size	293.5*104.5
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-3 Boundless

Beam Angle	15/23/38°
Size	280.8*93.6
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-4

Beam Angle	15/23/38°
Size	198*198
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W325-4 Boundless

Beam Angle	15/23/38°
Size	187.2*187.2
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40








FBS-W323-1A

Beam Angle 15/24/36/60°

Size	63.5*63.5
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W323-1A Boundless

Beam Angle 15/24/36/60°

Size	53.8*53.8
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W324-1A

Beam Angle 15/24/36/60°

Size	84*84
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W324-1A Boundless

Beam Angle 15/24/36/60°

Size	73.5*73.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W325-1A

Beam Angle 15/24/36/60°

Size	104.5*104.5
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40








FBS-W325-1A Boundless

Beam Angle 15/24/36/60°

Size	93.6*93.6
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




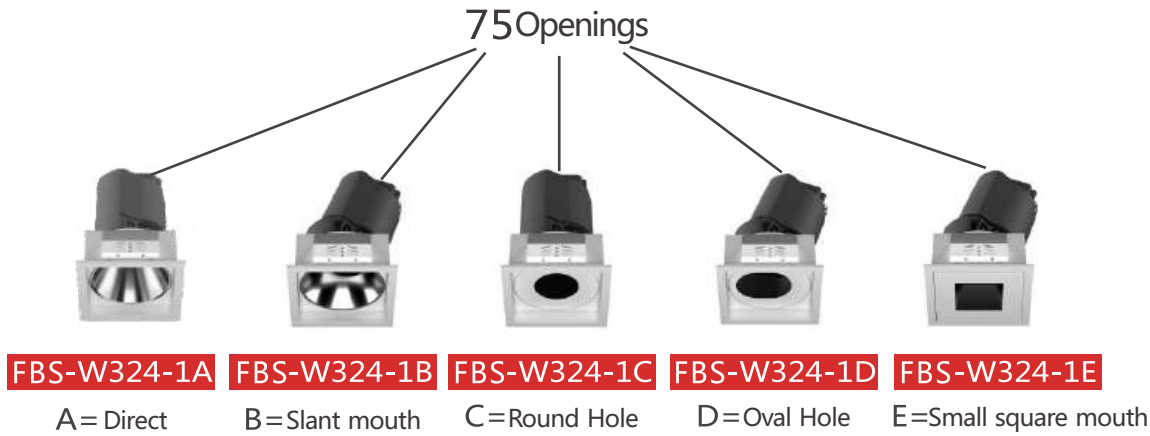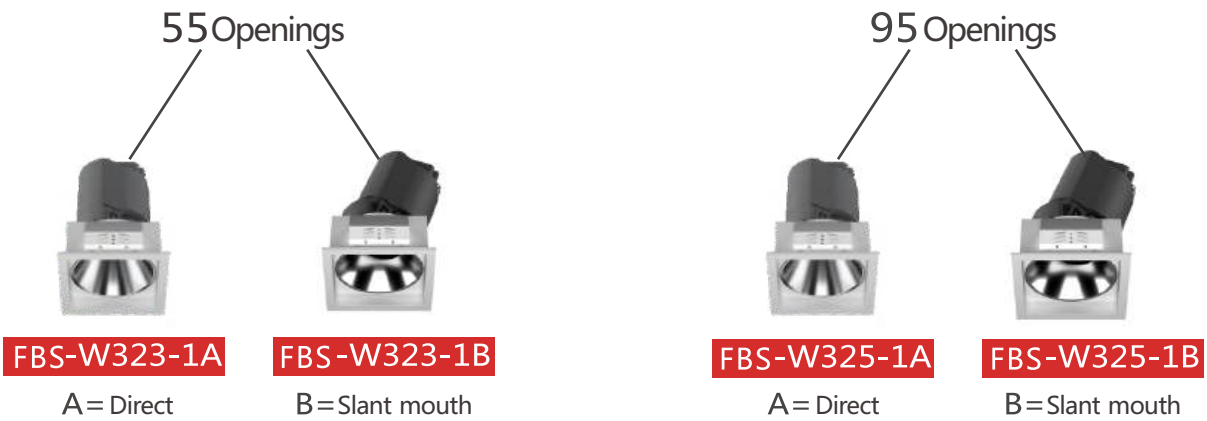




FBS-W323-2A

Beam Angle	15/24/38/60°
Size	117.5*63.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-2A Boundless

Beam Angle	15/24/38/60°
Size	107.6*53.8
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-3A

Beam Angle	15/24/38/60°
Size	171*63.5
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-3A Boundless

Beam Angle	15/24/38/60°
Size	161.5*53.8
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-4A

Beam Angle	15/24/38/60°
Size	117.5*117.5
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W323-4A Boundless

Beam Angle	15/24/38/60°
Size	107.6*107.6
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-2A

Beam Angle	15/24/38/60°
Size	158*84.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-2A Boundless

Beam Angle	15/24/38/60°
Size	147*73.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-3A

Beam Angle	15/24/38/60°
Size	231.5*84.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-3A Boundless

Beam Angle	15/24/38/60°
Size	220.5*73.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-4A

Beam Angle	15/24/38/60°
Size	158*158
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W324-4A Boundless

Beam Angle	15/24/38/60°
Size	147*147
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-2A

Beam Angle	15/24/38/60°
Size	198*104.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-2A Boundless

Beam Angle	15/24/38/60°
Size	187.2*93.6
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-3A

Beam Angle	15/24/38/60°
Size	293*104.5
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-3A Boundless

Beam Angle	15/24/38/60°
Size	280.8*93.6
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-4A

Beam Angle	15/24/38/60°
Size	198*198
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W325-4A Boundless


Beam Angle	15/24/38/60°
Size	187.2*187.2
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




VANIE SERIES COB LAMPU PEREGANGAN

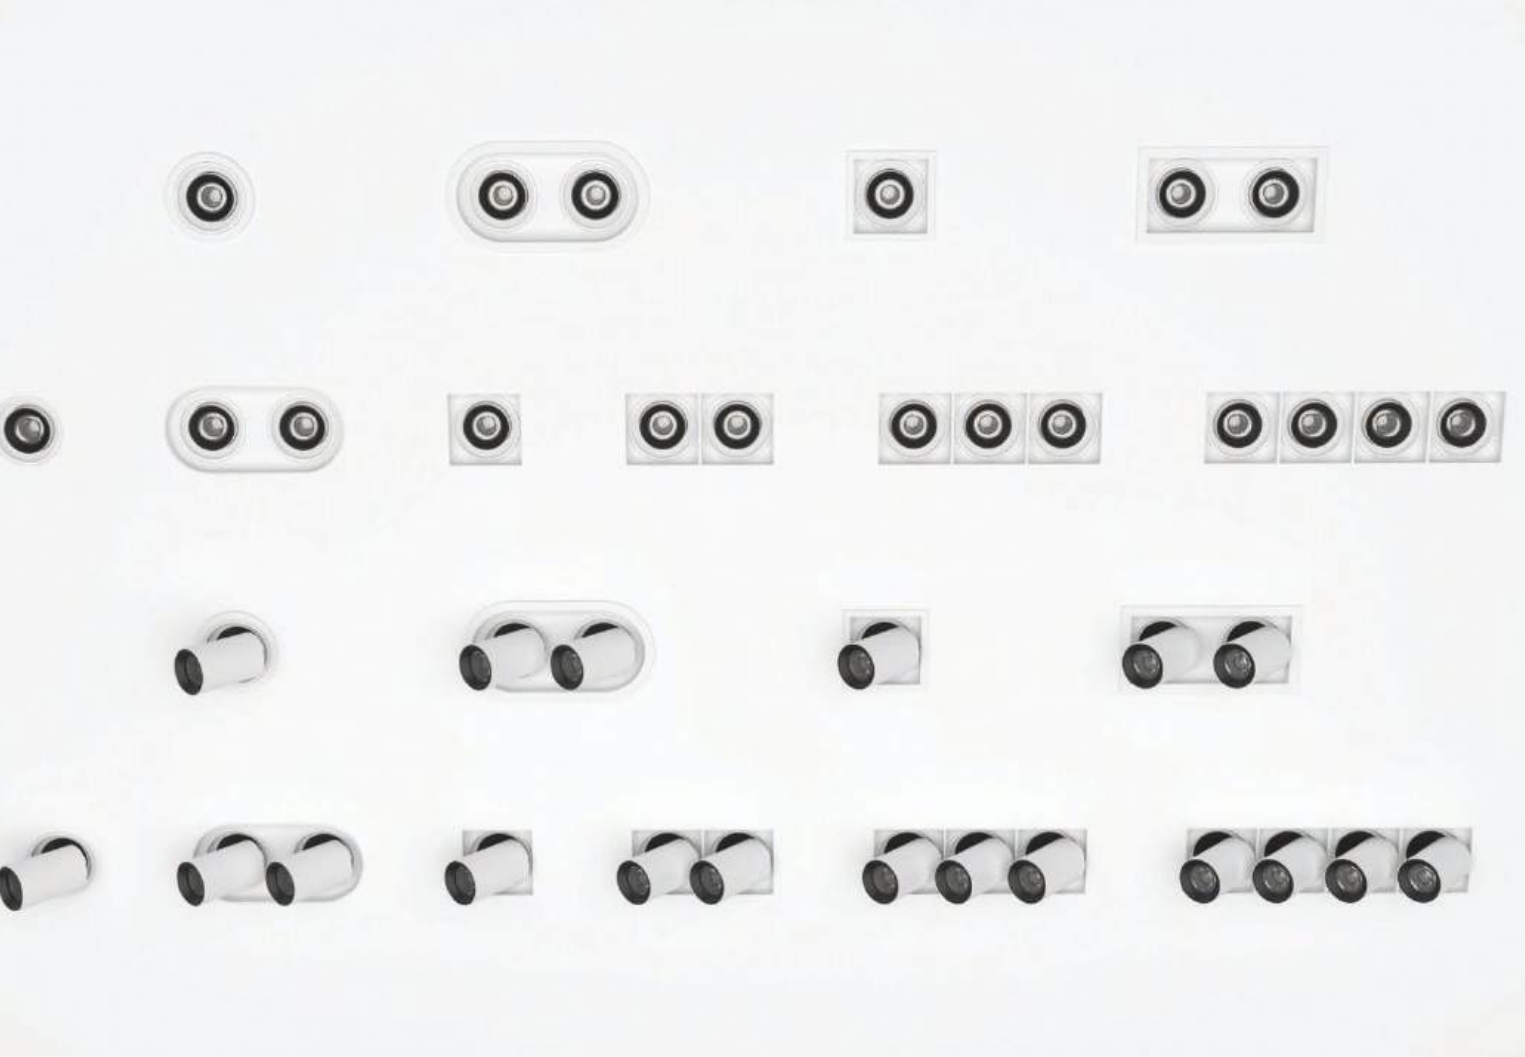

More Details

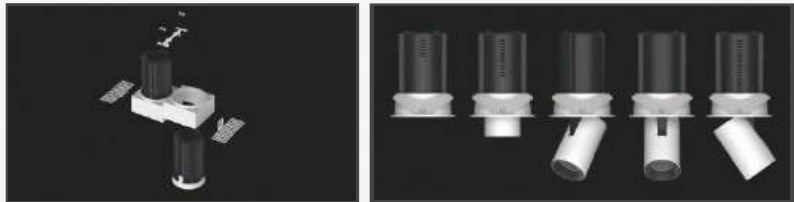


Product exploded view

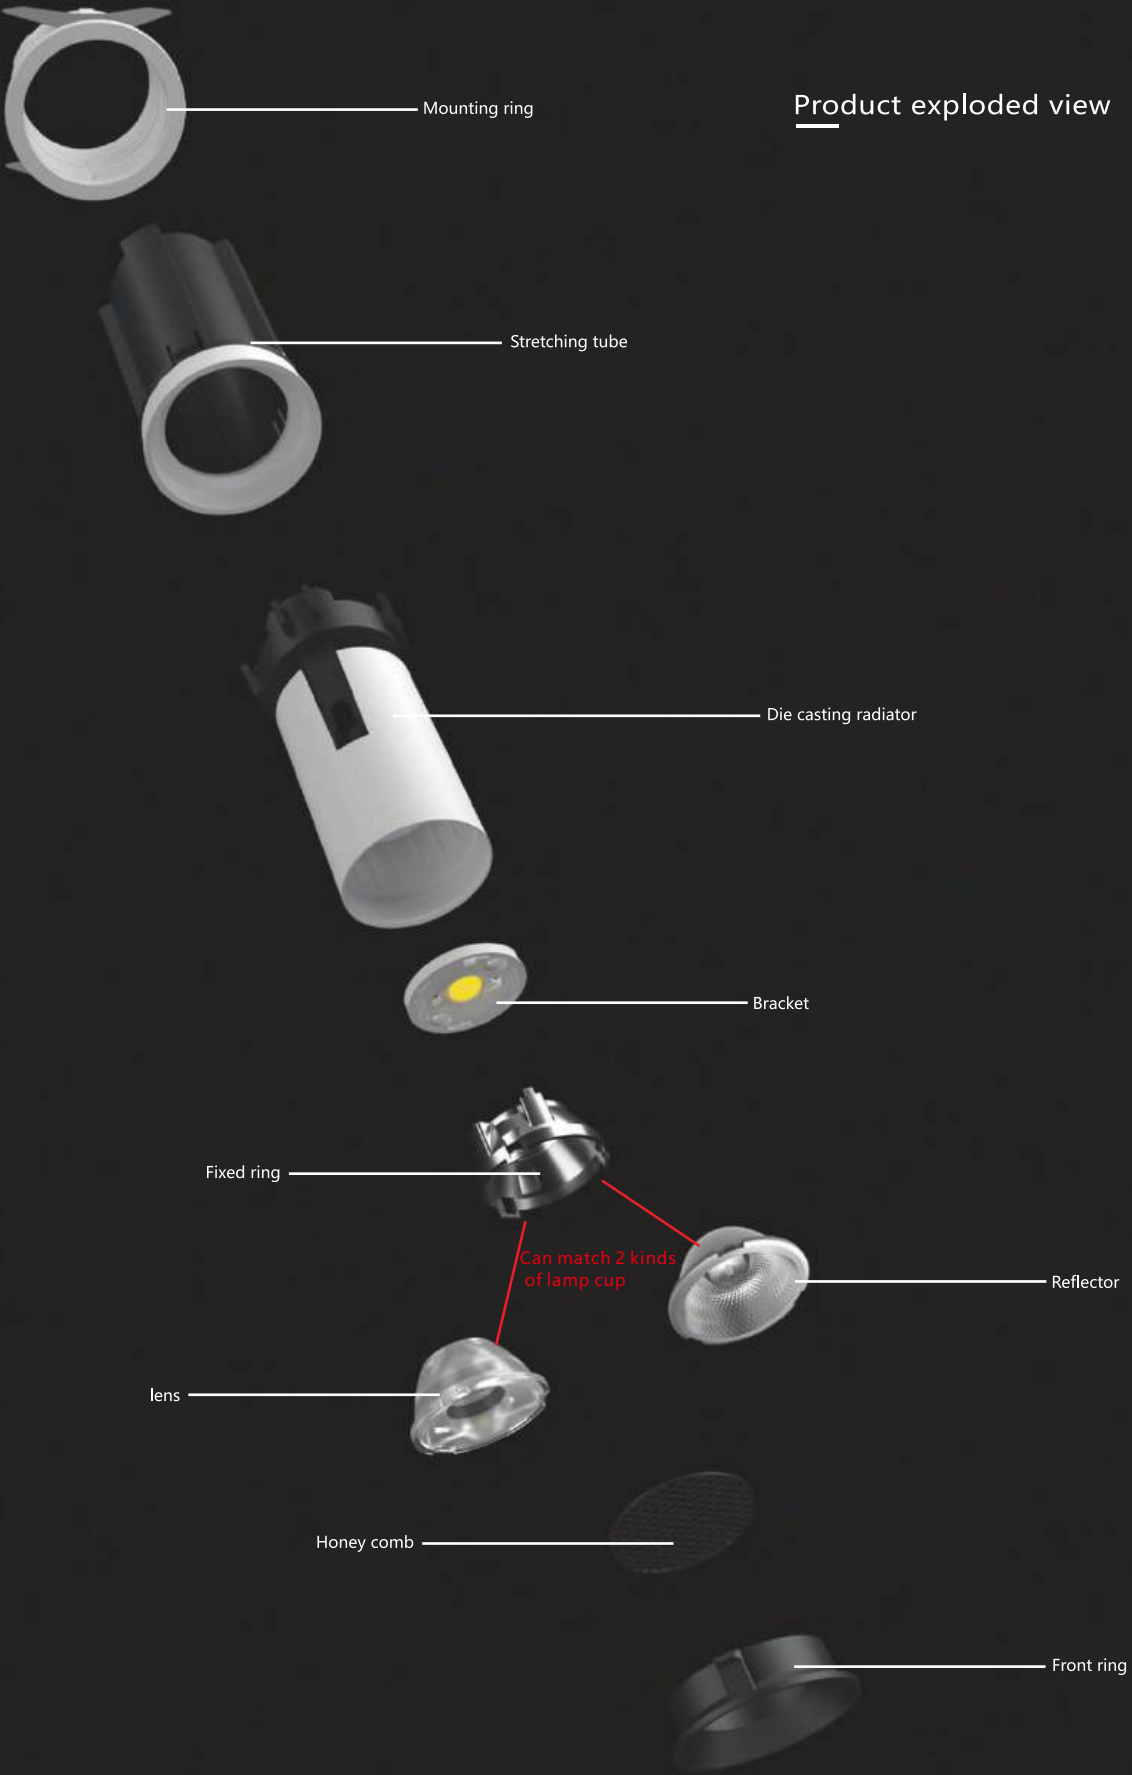




FBS-V323

Beam Angle	10/15/24/38/50°
Size	Φ61.6
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-V323

Beam Angle	10/15/24/38/50°
Size	Φ193.5*78.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323 Boundless

Beam Angle	10/15/24/38/50°
Size	Φ75
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-V323 Boundless

Beam Angle	10/15/24/38/50°
Size	Φ125.5*64.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324

Beam Angle	10/15/24/38/50°
Size	Φ84
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-V324

Beam Angle	10/15/24/38/50°
Size	Φ193.5*104.3
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324 Boundless

Beam Angle	10/15/24/38/50°
Size	Φ95
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T-V324 Boundless

Beam Angle	10/15/24/38/50°
Size	Φ176.9*87.4
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325

Size	Φ105
Power	25W
CCT	
Input volt.	
CRI	
IP Rating	




FBS-T-V325

Beam Angle	10/15/24/38/50°
Size	Φ238.5*124.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325 Boundless


Beam Angle	10/15/24/38/50°
Size	Φ115
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T-V325 Boundless

Beam Angle	10/15/24/38/50°
Size	Φ221.5*107.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




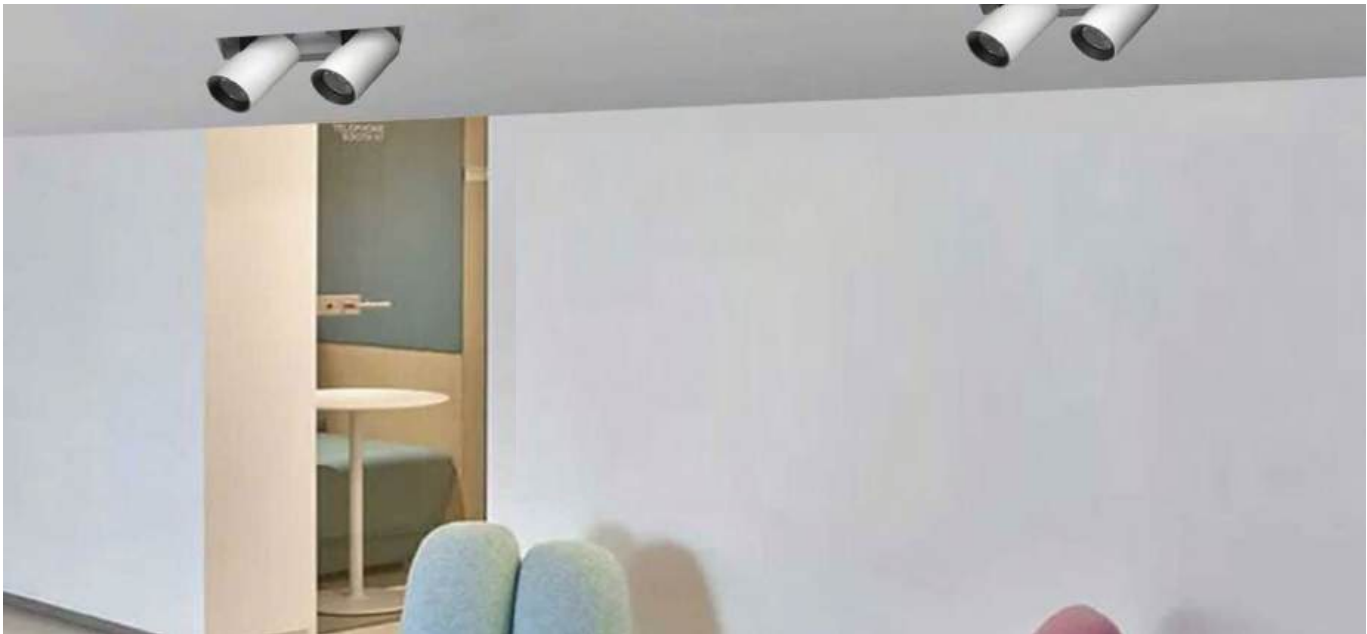



FBS-V323-1


Beam Angle	10/15/24/38/50°
Size	63.5*63.5
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V323


Beam Angle	10/15/24/38/50°
Size	129.5*68.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-V323-1 Boundless


Beam Angle	10/15/24/38/50°
Size	53.8*53.8
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V323 Boundless


Beam Angle	10/15/24/38/50°
Size	115.5*54.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-V324-1


Beam Angle	10/15/24/38/50°
Size	84.5*84.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V324


Beam Angle	10/15/24/38/50°
Size	180*90.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-V324-1 Boundless


Beam Angle	10/15/24/38/50°
Size	73.5*73.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V324 Boundless


Beam Angle	10/15/24/38/50°
Size	163*73.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-V325-1


Beam Angle	10/15/24/38/50°
Size	104.5*104.5
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V325


Beam Angle	10/15/24/38/50°
Size	180*90.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-V325-1 Boundless


Beam Angle	10/15/24/38/50°
Size	93.5*93.5
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-C-V325 Boundless


Beam Angle	10/15/24/38/50°
Size	207.4*93.4
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-V324-2

Beam Angle	10/15/24/38/50°
Size	158*84.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324-2 Boundless

Beam Angle	10/15/24/38/50°
Size	147*73.5
Power	2*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324-3

Beam Angle	10/15/24/38/50°
Size	231.5*84.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324-3 Boundless

Beam Angle	10/15/24/38/50°
Size	220.5*73.5
Power	3*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324-4

Beam Angle	10/15/24/38/50°
Size	158*158
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V324-4 Boundless

Beam Angle	10/15/24/38/50°
Size	147*147
Power	4*15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-2

Beam Angle	10/15/24/38/50°
Size	198*104.5
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-2 Boundless

Beam Angle	10/15/24/38/50°
Size	187.2*93.6
Power	2*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-3

Beam Angle	10/15/24/38/50°
Size	293.5*104.5
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-3 Boundless

Beam Angle	10/15/24/38/50°
Size	280.8*93.6
Power	3*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-4

Beam Angle	10/15/24/38/50°
Size	198*198
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V325-4 Boundless

Beam Angle	10/15/24/38/50°
Size	187.2*187.2
Power	4*25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-2

Beam Angle	10/15/24/38/50°
Size	117.5*63.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-2 Boundless

Beam Angle	10/15/24/38/50°
Size	107.6*53.8
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-3

Beam Angle	10/15/24/38/50°
Size	171*63.5
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-3 Boundless

Beam Angle	10/15/24/38/50°
Size	161.5*53.8
Power	3*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-4

Beam Angle	10/15/24/38/50°
Size	117.5*117.5
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-V323-4 Boundless


Beam Angle	10/15/24/38/50°
Size	107.6*107.6
Power	4*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



VANEL SERIES COB LAMPU MATA BANTENG

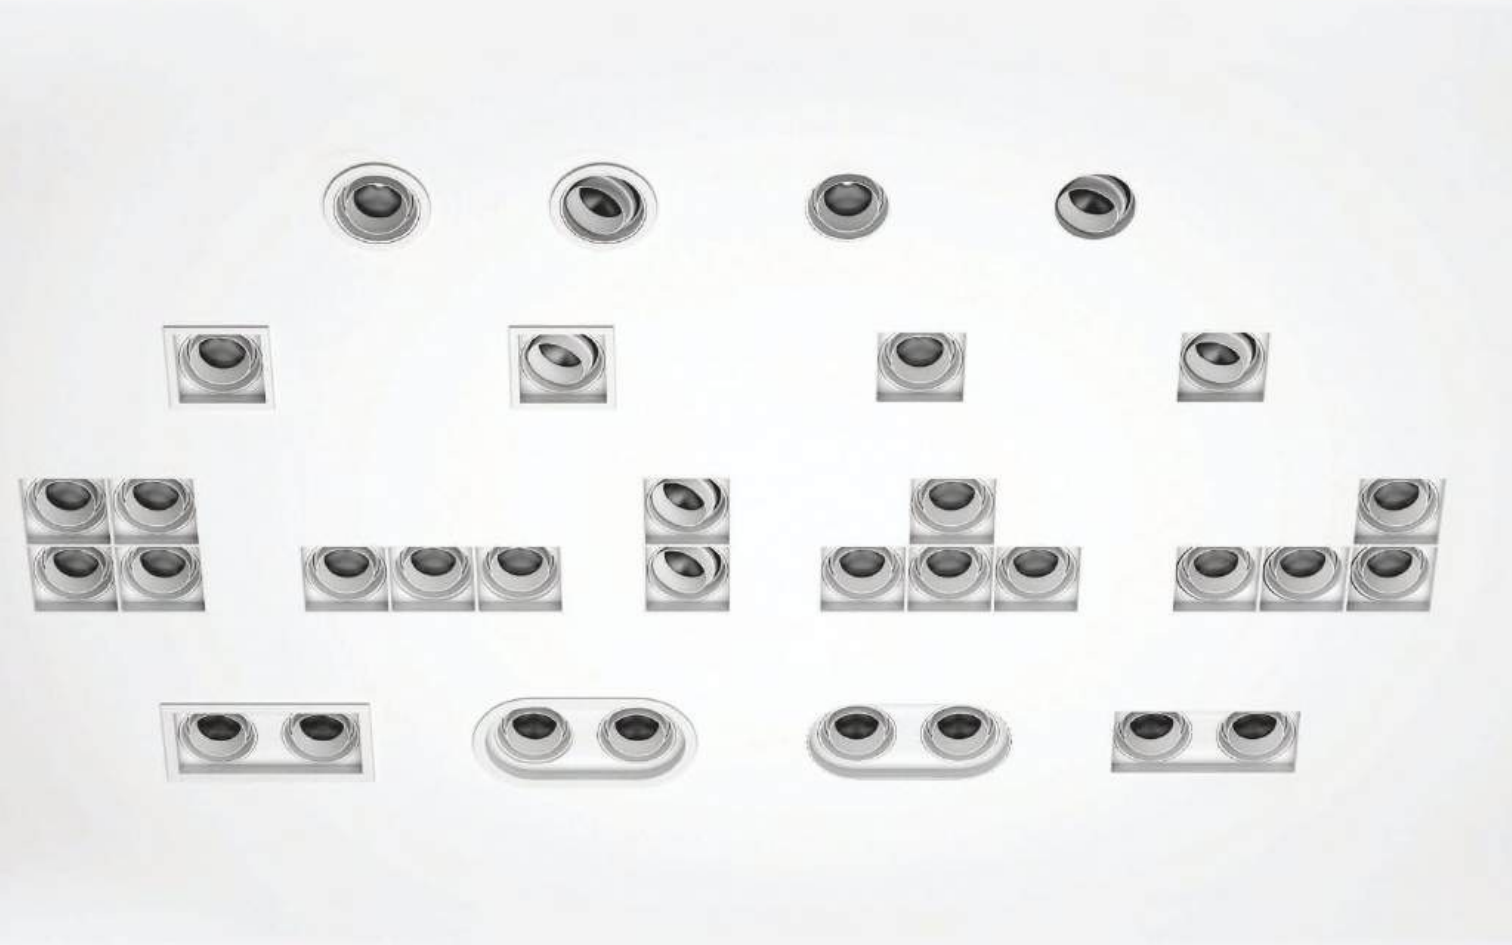



More Details

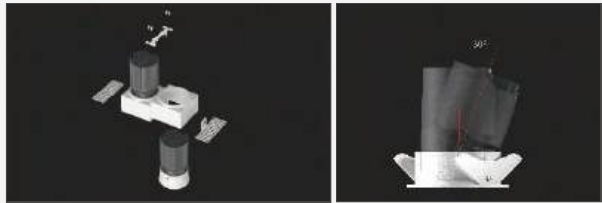

-High end supplier of commercial lighting in the world -

Product exploded view

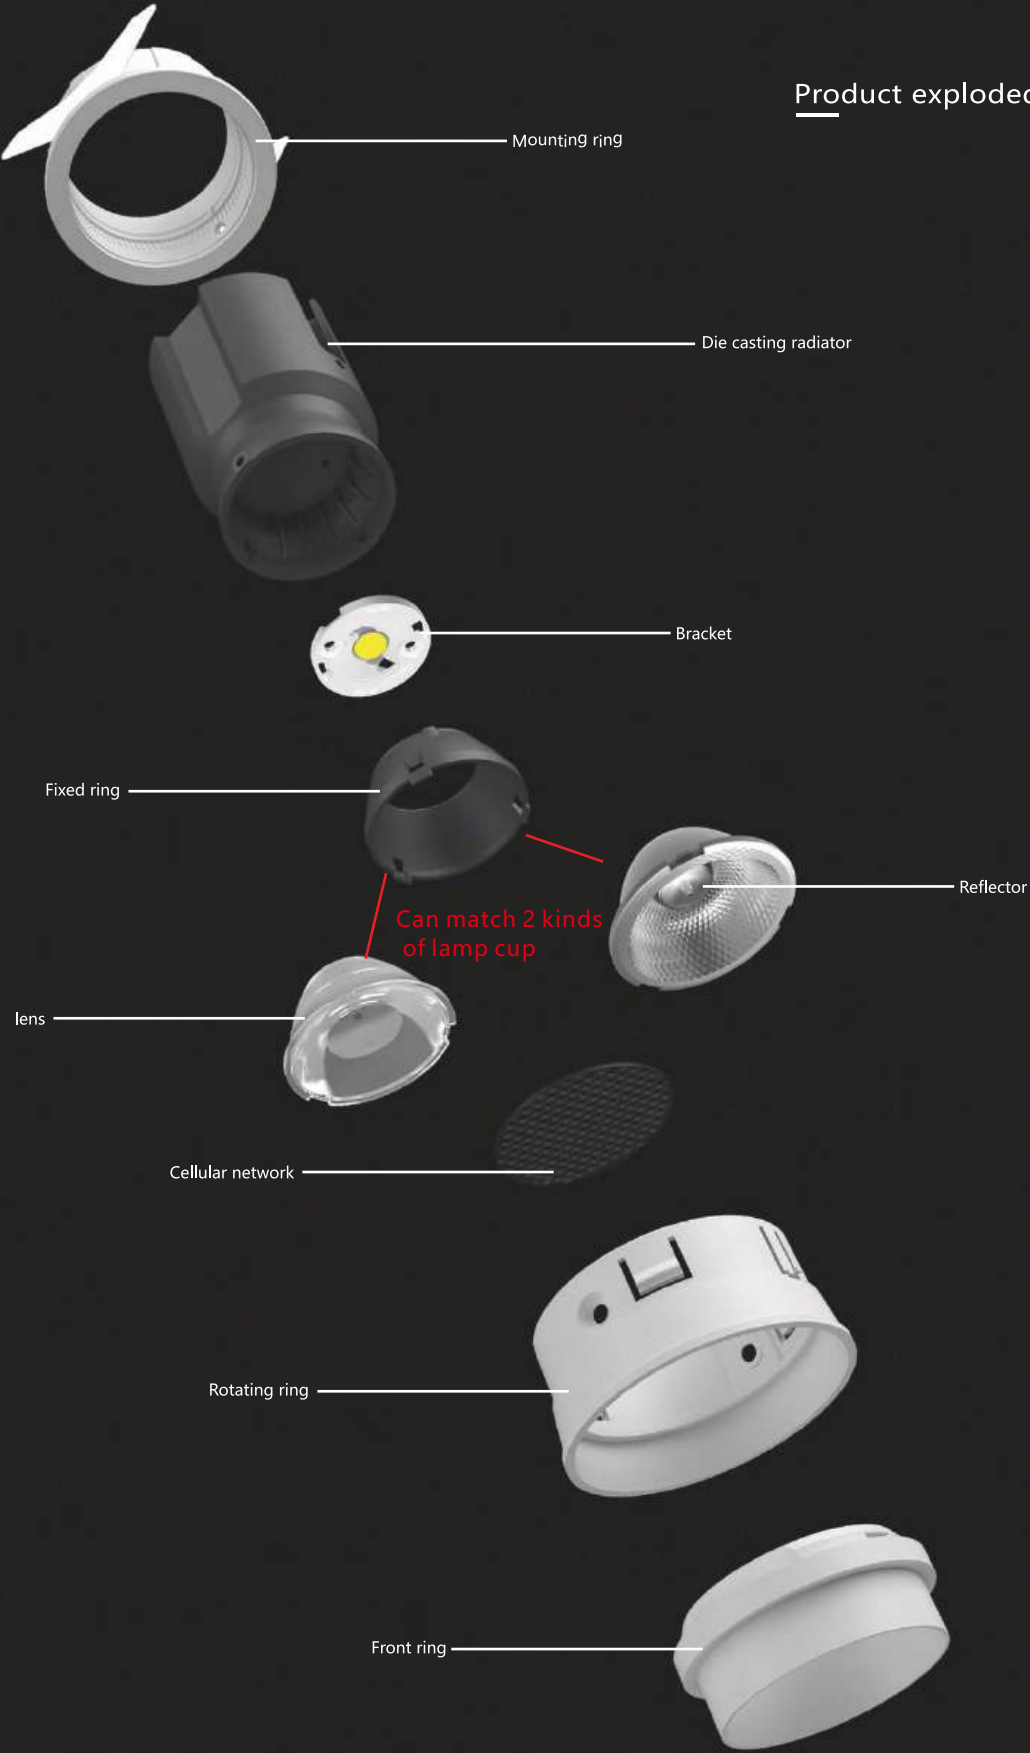

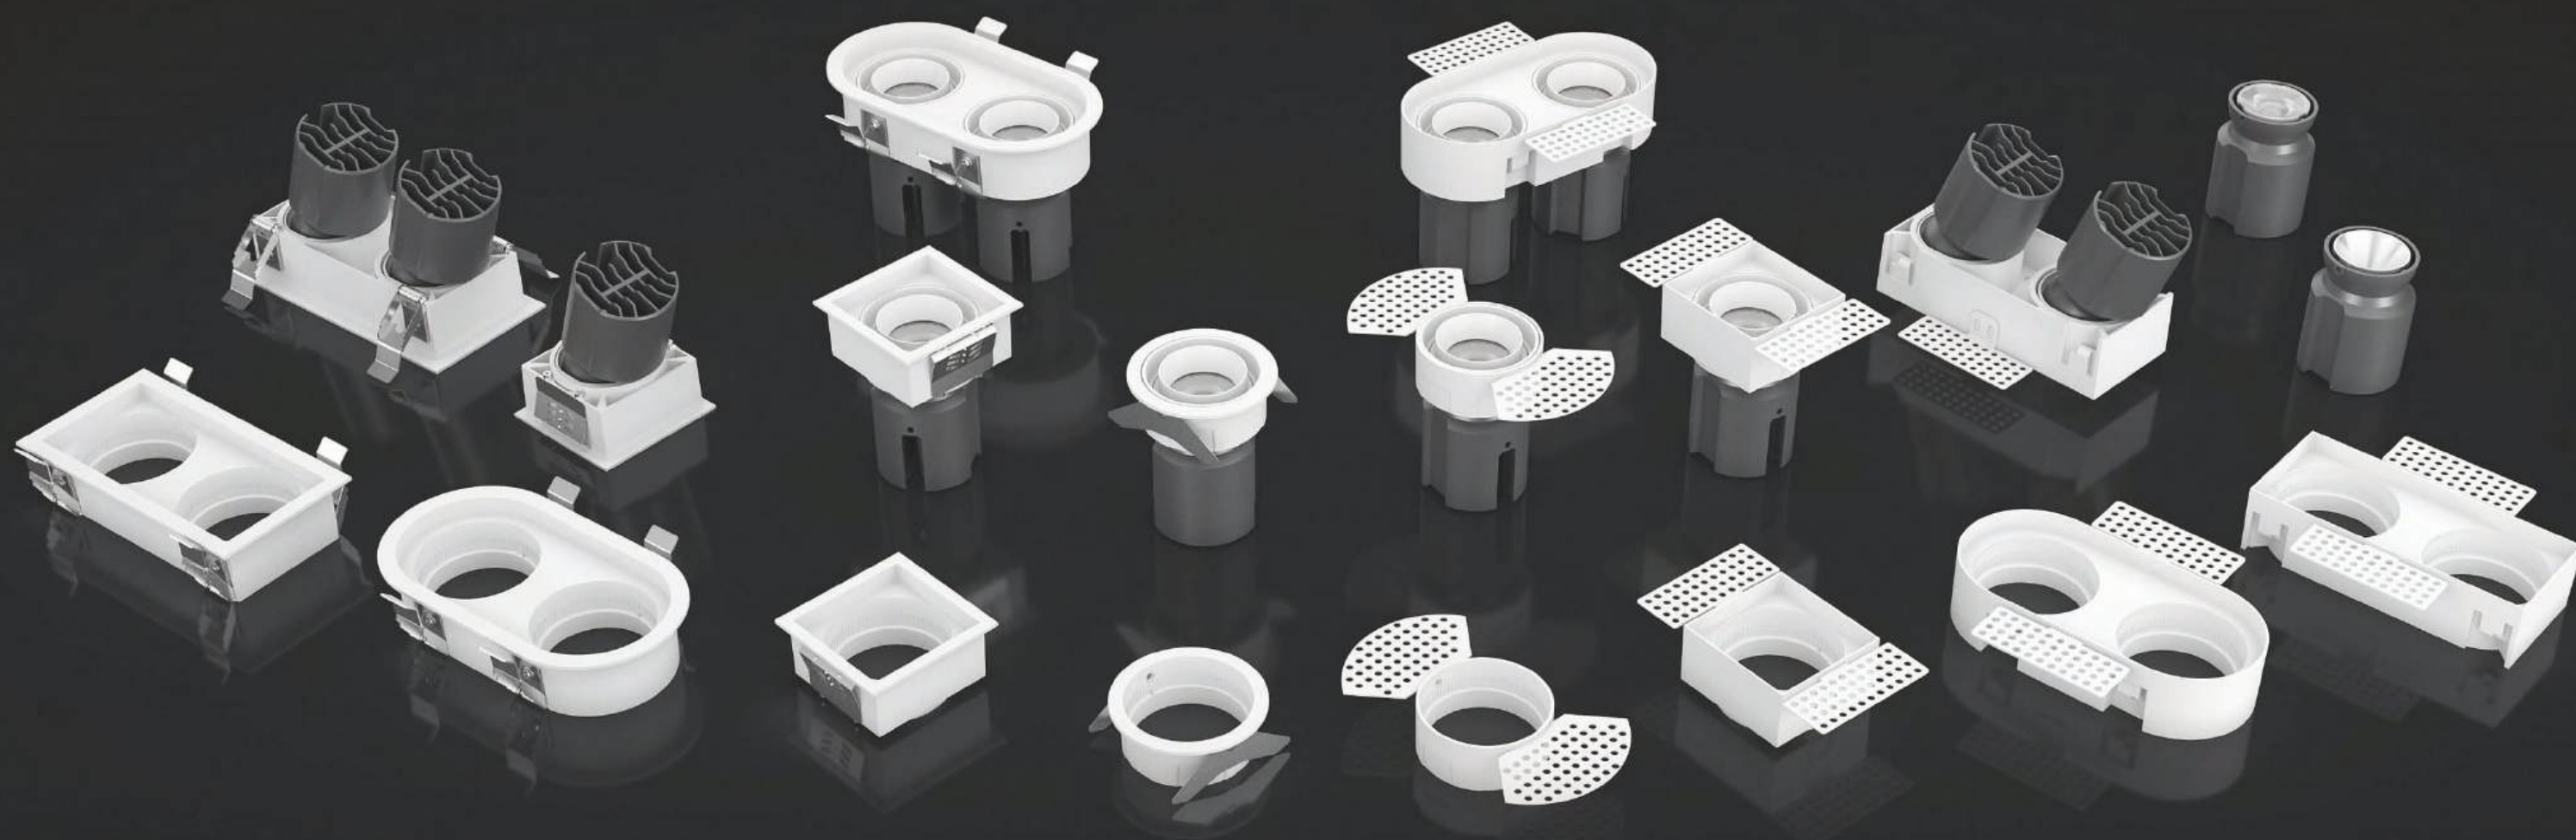



FBS-S323

Beam Angle 10/15/24/38/50°

Size $\Phi 61.6$


Power 7W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S323

Beam Angle 10/15/24/38/50°

Size $\Phi 139.5 \times 78.5$


Power 2*7W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS -S323 边

Beam Angle 10/15/24/38/50°

Size $\Phi 75$


Power 7W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S323 边

Beam Angle 10/15/24/38/50°

Size $\Phi 125.5 \times 64.5$


Power 2*7W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-S324

Beam Angle 10/15/24/38/50°

Size $\Phi 84$


Power 20W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S324

Beam Angle 10/15/24/38/50°

Size $\Phi 193.8 \times 104.3$


Power 2*20W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS -S324 边

Beam Angle 10/15/24/38/50°

Size $\Phi 95$


Power 20W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S324 边

Beam Angle 2200K-6500K

Size $\Phi 176.9 \times 87.4$


Power 2*20W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-S325

Beam Angle 10/15/24/38/50°

Size $\Phi 105$


Power 35W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S325

Beam Angle 10/15/24/38/50°

Size $\Phi 238.5 \times 124.5$


Power 2*35W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS -S325 边

Beam Angle 10/15/24/38/50°

Size $\Phi 115$


Power 35W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40



FBS-T-S325 边

Beam Angle 10/15/24/38/50°

Size $\Phi 221.5 \times 107.5$


Power 2*35W

CCT 2200K-6500K

Input volt. AC100-277V

CRI RA90

IP Rating IP40








FBS-S323-1

Beam Angle 10/15/24/38/50°

Size	63.5*63.5
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S323-1

Beam Angle 10/15/24/38/50°

Size	129.5*68.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S323-1 Boundless

Beam Angle 10/15/24/38/50°

Size	53.8*53.8
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S323-1 Boundless

Beam Angle 10/15/24/38/50°

Size	115.5*54.5
Power	2*7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S324-1

Beam Angle 10/15/24/38/50°

Size	84*84
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S324-1

Beam Angle 10/15/24/38/50°

Size	180*90.5
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S324-1 Boundless

Beam Angle 10/15/24/38/50°

Size	73.5*73.5
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S324-1 Boundless

Beam Angle 10/15/24/38/50°

Size	163*73.5
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S325-1

Beam Angle 10/15/24/38/50°

Size	104.5*104.5
Power	35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S325-1

Beam Angle 10/15/24/38/50°

Size	223.5*109.5
Power	2*35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S325-1 Boundless

Beam Angle 10/15/24/38/50°

Size	93.6*93.6
Power	35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-C-S325-1 Boundless

Beam Angle 10/15/24/38/50°

Size	207.4*93.4
Power	2*35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-S323-2

Beam Angle 10/15/24/38/50°


Size 117.5*63.5
Power 2*7W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40



FBS-S323-2 Boundless

Beam Angle 10/15/24/38/50°


Size 107.6*53.8
Power 2*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S323-3

Beam Angle 10/15/24/38/50°


Size 171*63.5
Power 3*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S323-3 Boundless

Beam Angle 10/15/24/38/50°


Size 161.5*53.8
Power 3*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S323-4

Beam Angle 10/15/24/38/50°


Size 117.5*117.5
Power 4*7W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40



FBS-S323-4 Boundless

Beam Angle 10/15/24/38/50°


Size 107.6*107.6
Power 4*7W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S324-2

Beam Angle 10/15/24/38/50°


Size 158*84.5
Power 2*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S324-3

Beam Angle 10/15/24/38/50°


Size 231.5*84.5
Power 3*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S324-4

Beam Angle 10/15/24/38/50°


Size 158*158
Power 4*20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S325-2

Beam Angle 10/15/24/38/50°


Size 198*104.5
Power 2*35W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S325-3

Beam Angle 10/15/24/38/50°


Size 293.5*104.5
Power 3*35W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S325-4


Beam Angle 10/15/24/38/50°

Size 198*198
Power 4*35W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-S324-2 Boundless

Size 147*73.5
Power 2*20W
CCT
Input volt.
CRI
IP Rating




FBS-S324-3 Boundless

Size 220.5*73.5
Power 3*20W
CCT
Input volt.
CRI
IP Rating




FBS-S324-4 Boundless

Size 147*147
Power 4*20W
CCT
Input volt.
CRI
IP Rating



FBS-S325-2 Boundless


Size 187.2*93.5
Power 2*25W
CCT
Input volt.
CRI
IP Rating



FBS-S325-3 Boundless

Beam Angle 10/15/24/38/50°


Size 280.8*93.5
Power 3*25W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



FBS-S325-4 Boundless

Beam Angle 10/15/24/38/50°


Size 187.2*187.2
Power 4*25W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



HOTEL SPOTLIGHT SERIES




More Details

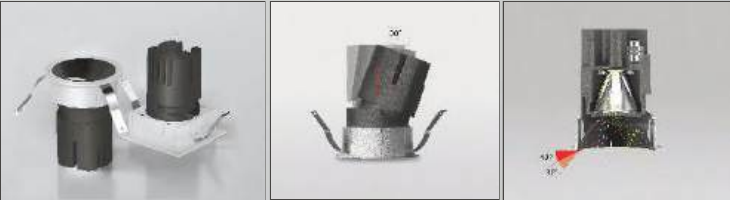


Product exploded view



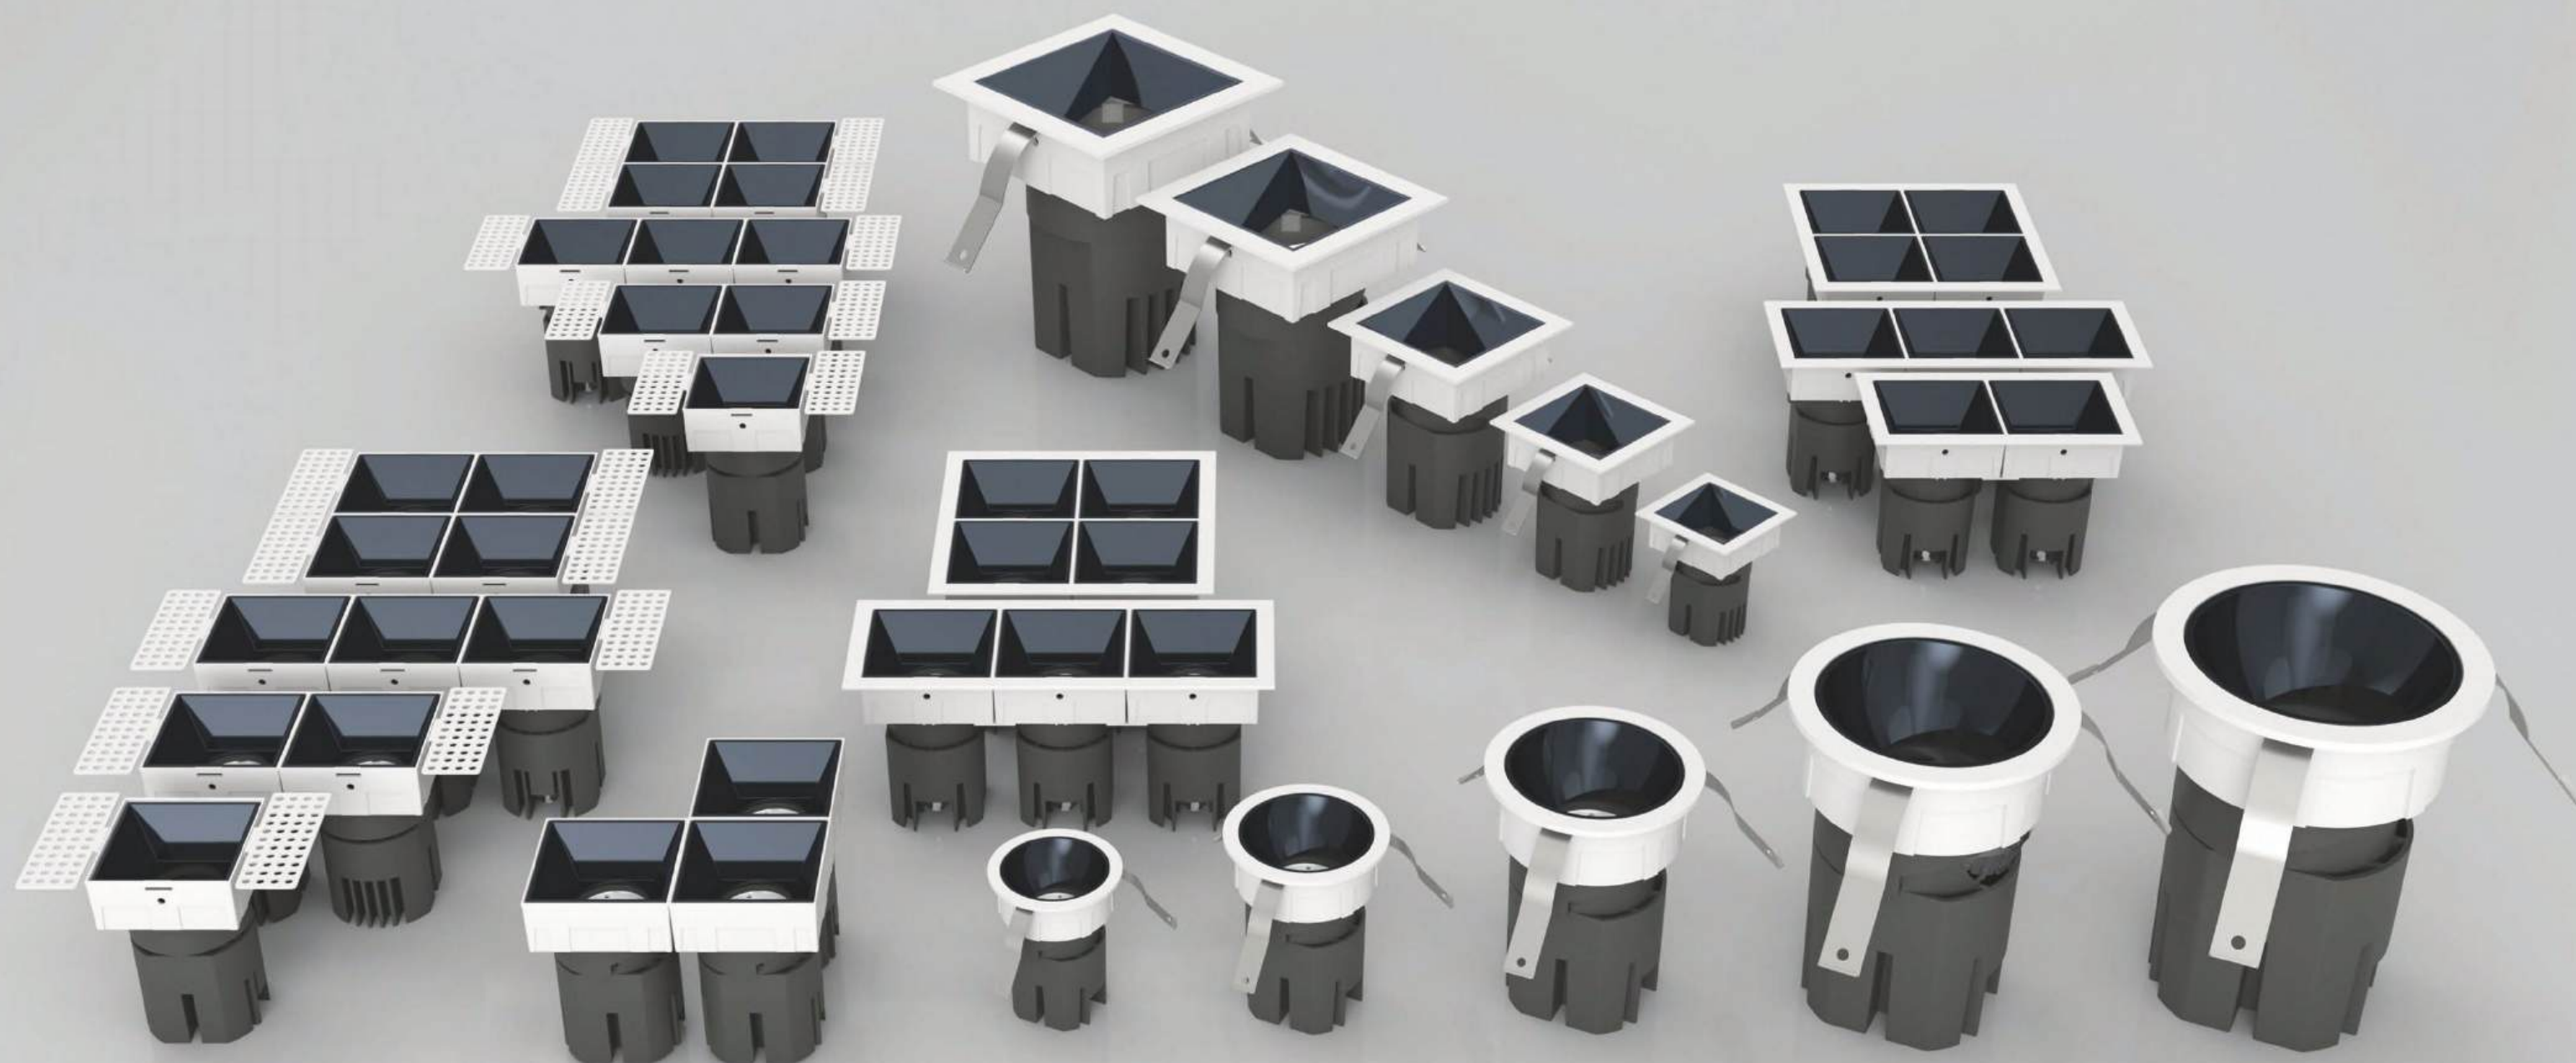




Multi-color reflector is optional to meet the needs of different occasions

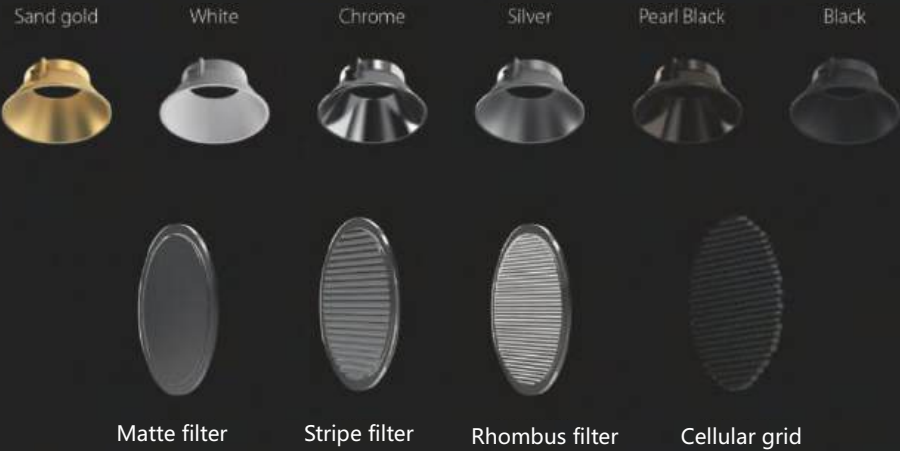



FBS-W313


Beam Angle	15/24/38°
Size	Φ68
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	
IP Rating	





FBS-W316


Beam Angle	15/24/38°
Size	Φ142
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	AC100-277V
IP Rating	IP40






FBS-W313-1


Beam Angle	15/24/38°
Size	68*68
Power	7W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-W316-1


Beam Angle	15/24/38°
Size	142*142
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	
IP Rating	





FBS-W314


Beam Angle	15/24/38°
Size	Φ84
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W317


Beam Angle	15/24/38°
Size	Φ165
Power	40W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W314-1


Beam Angle	15/24/38°
Size	88*88
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-W317-1


Beam Angle	15/24/38°
Size	165*165
Power	40W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





FBS-W315


Beam Angle	15/24/38°
Size	Φ110
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-W315-1

Beam Angle	15/24/38°
Size	110*110
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



According to the lighting effect, face ring can choose a variety of styles of light effect each face ring has its own unique light effect

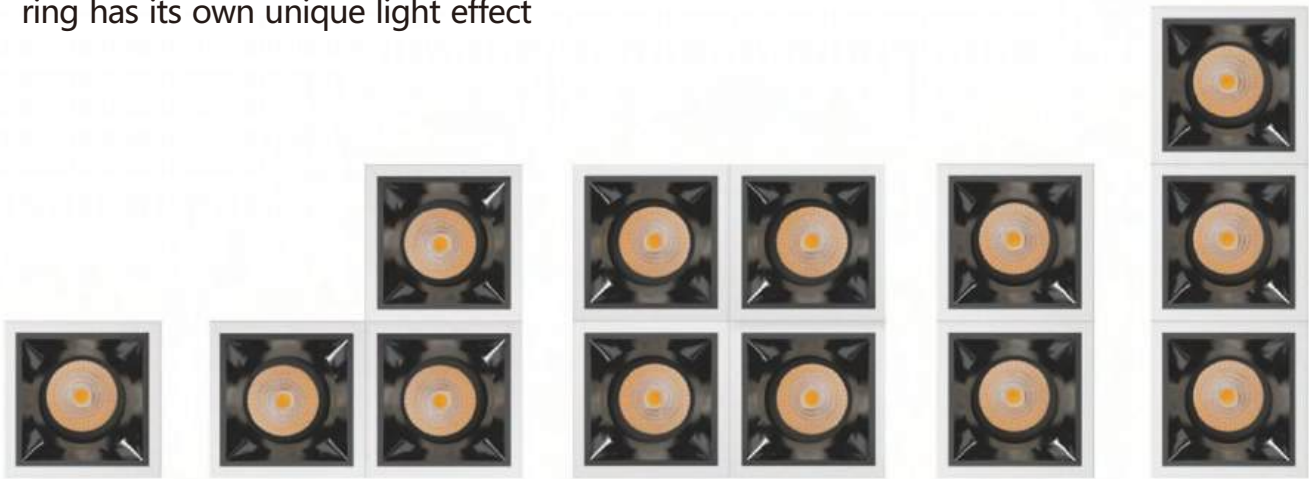

FBS-W314-2

Beam Angle	15/23/38°
Size	159*87
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W315-2

Beam Angle	15/23/38°
Size	220*110
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W314-2 Boundless

Beam Angle	15/23/38°
Size	159*87
Power	2*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W315-2 Boundless

Beam Angle	15/23/38°
Size	210*110
Power	2*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W314-3

Beam Angle	15/23/38°
Size	230*87
Power	3*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W315-3

Beam Angle	15/23/38°
Size	292*110
Power	3*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W314-3 Boundless

Beam Angle	15/23/38°
Size	230*87
Power	3*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W315-3 Boundless

Beam Angle	15/23/38°
Size	292*110
Power	3*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W314-4

Beam Angle	15/23/38°
Size	159*159
Power	4*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W315-4

Beam Angle	15/23/38°
Size	202*202
Power	4*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-W314-4 Boundless

Beam Angle	15/23/38°
Size	159*159
Power	4*12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-W315-4 Boundless

Beam Angle	15/23/38°
Size	202*202
Power	4*20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40

COB POLARIZED DOWNLIGHT SERIES




More Details

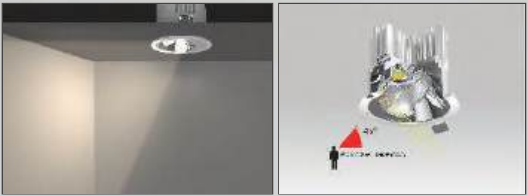


FBS-T251

Beam Angle	15/23/38°
Size	Φ85
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-T3011

Beam Angle	15/23/38°
Size	Φ108
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-T4011

Beam Angle	15/23/38°
Size	Φ135
Power	35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



AUNTI-GLARE COB SPOT LIGHT

LED GRILLE LIGHT




More Details




Beam angle:15/23/38/60°




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-T2511A	85	12W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T3011A	108	20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T4011A	135	35W	2200K-6500K	AC100-277V	RA90	IP40




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-T3011B	138	20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T4011B	165	35W	2200K-6500K	AC100-277V	RA90	IP40




More Details

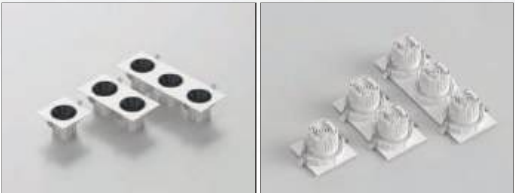


Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-T2511A-1	115x115	12W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T3011A-1	138x138	20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T4011A-1	163x163	35W	2200K-6500K	AC100-277V	RA90	IP40



Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-T2511A-2	230x115	2x12W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T3011A-2	278x138	2x20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T4011A-2	330x163	2x35W	2200K-6500K	AC100-277V	RA90	IP40




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-T2511A-3	350x115	3x12W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T3011A-3	400x125	3x20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-T4011A-3	490x163	3x35W	2200K-6500K	AC100-277V	RA90	IP40




EMBEDDED LINEAR LAMP SERIES



More Details

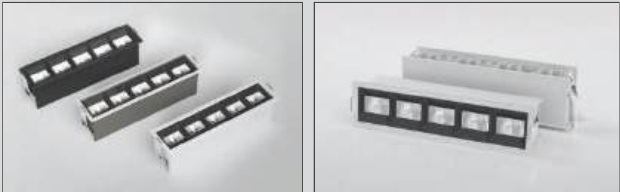

Optical accessories Customizable




custmize the angle,liht effect,and shape accordding to the needs of light and shadow

-High end supplier of commercial lighting in the world -




FBS-XTD-1

Beam Angle on the left
Size 51.5*51.5
Power 4W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-10

Beam Angle on the left
Size 393*51.5
Power 40W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-3

Beam Angle on the left
Size 127*51.5
Power 12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-4

Beam Angle on the left
Size 90*90
Power 16W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-5

Beam Angle on the left
Size 203*51.5
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-9

Beam Angle on the left
Size 128*128
Power 36W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40



Borderless Line Light Series

Optical accessories Customizable

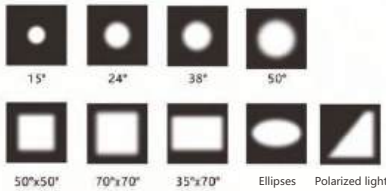


customize the angle,liht effect,and shape accordng to the needs of light and shadow

EMBEDDED LINEAR LAMP SERIES




FBS-XTD-3A

Beam Angle on the left
Size 127*51.5
Power 12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-3C

Beam Angle on the left
Size 138*62
Power 12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-3C-2

Beam Angle on the left
Size 138*146
Power 2*12W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-5A

Beam Angle on the left
Size 203*51.5
Power 20W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-4A

Beam Angle on the left
Size 90*90
Power 16W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-5C

Beam Angle on the left
Size 215*62
Power 20W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-5C-2

Beam Angle on the left
Size 215*146
Power 2*20W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-10A

Beam Angle on the left
Size 393*51.5
Power 40W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-9A

Beam Angle on the left
Size 128*128
Power 36W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS-XTD-10C

Beam Angle on the left
Size 405*62
Power 40W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40



FBS-XTD-10C-2


Beam Angle on the left
Size 405*146
Power 2*40W
CCT 2200K-6500K
Input volt.AC100-277V
CRI RA90
IP Rating IP40



LINEAR GUIDE LIGHT SERIES




Optical accessories Customizable

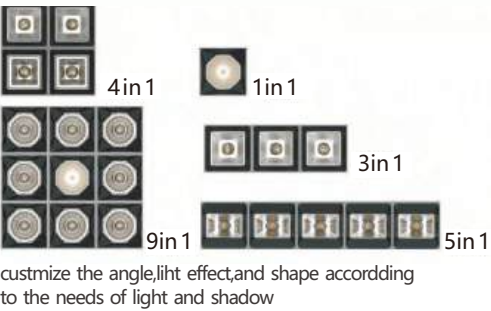


FBS-XTD-4T-2

Beam Angle on the right	
Size	205
Power	2*16W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-XTD-9T

Beam Angle on the right	
Size	160
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-XTD-4T

Beam Angle on the right	
Size	120
Power	16W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-XTD-5T

Beam Angle on the top	
Size	193
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-XTD-3T


Beam Angle on the top	
Size	118
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



LINEAR GUIDE LIGHT SERIES

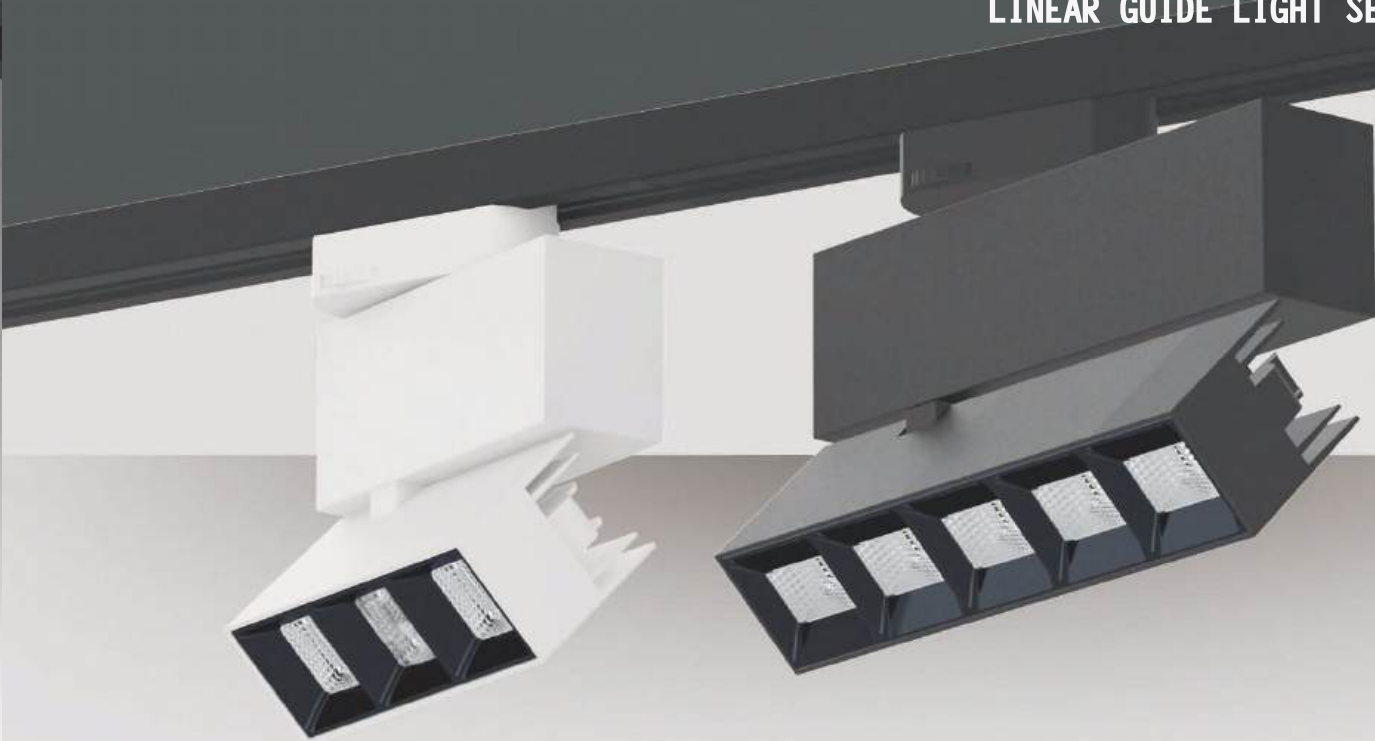

Optical accessories Customizable

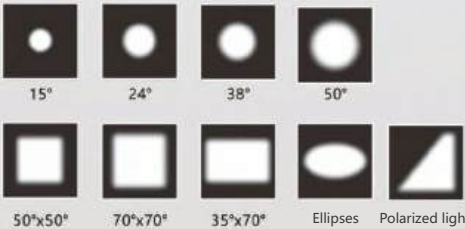

custmize the angle,liht effect,and shape accordng to the needs of light and shadow


ELEPHANT TRUNK LIGHT SERIES

GRILLE LIGHT SERIES




FBS -J19

Beam Angle 15 , 23, 38°
Size $\Phi 90$
Power 9W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS -J22

Beam Angle 15 , 23, 38°
Size $\Phi 165$
Power 40W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS -J23

Beam Angle 15 , 23, 38°
Size $\Phi 190$
Power 50W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS -J20

Beam Angle 15 , 23, 38°
Size $\Phi 114$
Power 16W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




FBS -J21


Beam Angle 15 , 23, 38°
Size $\Phi 138$
Power 30W
CCT 2200K-6500K
Input volt. AC100-277V
CRI RA90
IP Rating IP40




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-20-1	115x115	15W	2200K-6500K	AC100-277V	RA90	IP40
FBS-21-1	138x138	25W	2200K-6500K	AC100-277V	RA90	IP40
FBS-22-1	163x63	35W	2200K-6500K	AC100-277V	RA90	IP40



Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-20-2	230x115	2*15W	2200K-6500K	AC100-277V	RA90	IP40
FBS-21-2	278x138	2*5W	2200K-6500K	AC100-277V	RA90	IP40
FBS-22-2	330x163	2*35W	2200K-6500K	AC100-277V	RA90	IP40



Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-20-3	350x115	3*15W	2200K-6500K	AC100-277V	RA90	IP40
FBS-21-3	417x138	3*5W	2200K-6500K	AC100-277V	RA90	IP40
FBS-22-3	495x163	3*35W	2200K-6500K	AC100-277V	RA90	IP40



RECESSED DOWNLIGHT SERIES




More Details




FBS-2501P

Beam Angle	45°
Size	Φ85
Power	12W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-5001P

Beam Angle	45°
Size	Φ150
Power	35W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-3001P

Beam Angle	45°
Size	Φ105
Power	18W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-6001P

Beam Angle	45°
Size	Φ191
Power	45W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-4001P

Beam Angle	45°
Size	Φ131
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-8001P

Beam Angle	45°
Size	Φ215
Power	60W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40





RECESSED DOWNLIGHT SERIES




More Details



Beam Angle:15,24,36,55°



Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-2501H	80	12W	2200K-6500K	AC100-277V	RA90	Ip65
FBS-3001H	105	18W	2200K-6500K	AC100-277V	RA90	Ip65
FBS-4001H	131	30W	2200K-6500K	AC100-277V	RA90	Ip65
FBS-5001H	150	35W	2200K-6500K	AC100-277V	RA90	Ip65
FBS-6001H	191	45W	2200K-6500K	AC100-277V	RA90	Ip65
FBS-8001H	215	60W	2200K-6500K	AC100-277V	RA90	Ip65



RECESSED DOWNLIGHT SERIES



Optical accessories Customizable



COB Light source



SMD Light source

Light source optional COB SMD


Light body type optional round square




3001G-1系列

3001G-2系列



3001G-3系列




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
3001G-1	Φ110	7W	2200K-6500K	AC100-277V	RA90	IP40
4001G-1	Φ140	10W	2200K-6500K	AC100-277V	RA90	IP40
5001G-1	Φ170	18W	2200K-6500K	AC100-277V	RA90	IP40
6001G-1	Φ190	24W	2200K-6500K	AC100-277V	RA90	IP40
8001G-1	Φ230	30W	2200K-6500K	AC100-277V	RA90	IP40
10001G-1	Φ260	35W	2200K-6500K	AC100-277V	RA90	IP40




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
3001G-2	Φ110	7W	2200K-6500K	AC100-277V	RA90	IP40
4001G-2	Φ140	10W	2200K-6500K	AC100-277V	RA90	IP40
5001G-2	Φ170	18W	2200K-6500K	AC100-277V	RA90	IP40
6001G-2	Φ190	24W	2200K-6500K	AC100-277V	RA90	IP40
8001G-2	Φ230	30W	2200K-6500K	AC100-277V	RA90	IP40
10001G-2	Φ260	35W	2200K-6500K	AC100-277V	RA90	IP40



Model	Size	Power	CCT	Input volt.	CRI	IP Rating
3001G-3	Φ110	7W	2200K-6500K	AC100-277V	RA90	IP40
4001G-3	Φ140	10W	2200K-6500K	AC100-277V	RA90	IP40
5001G-3	Φ170	18W	2200K-6500K	AC100-277V	RA90	IP40
6001G-3	Φ190	24W	2200K-6500K	AC100-277V	RA90	IP40
8001G-3	Φ230	30W	2200K-6500K	AC100-277V	RA90	IP40
10001G-3	Φ260	35W	2200K-6500K	AC100-277V	RA90	IP40




RECESSED DOWNLIGHT SERIES

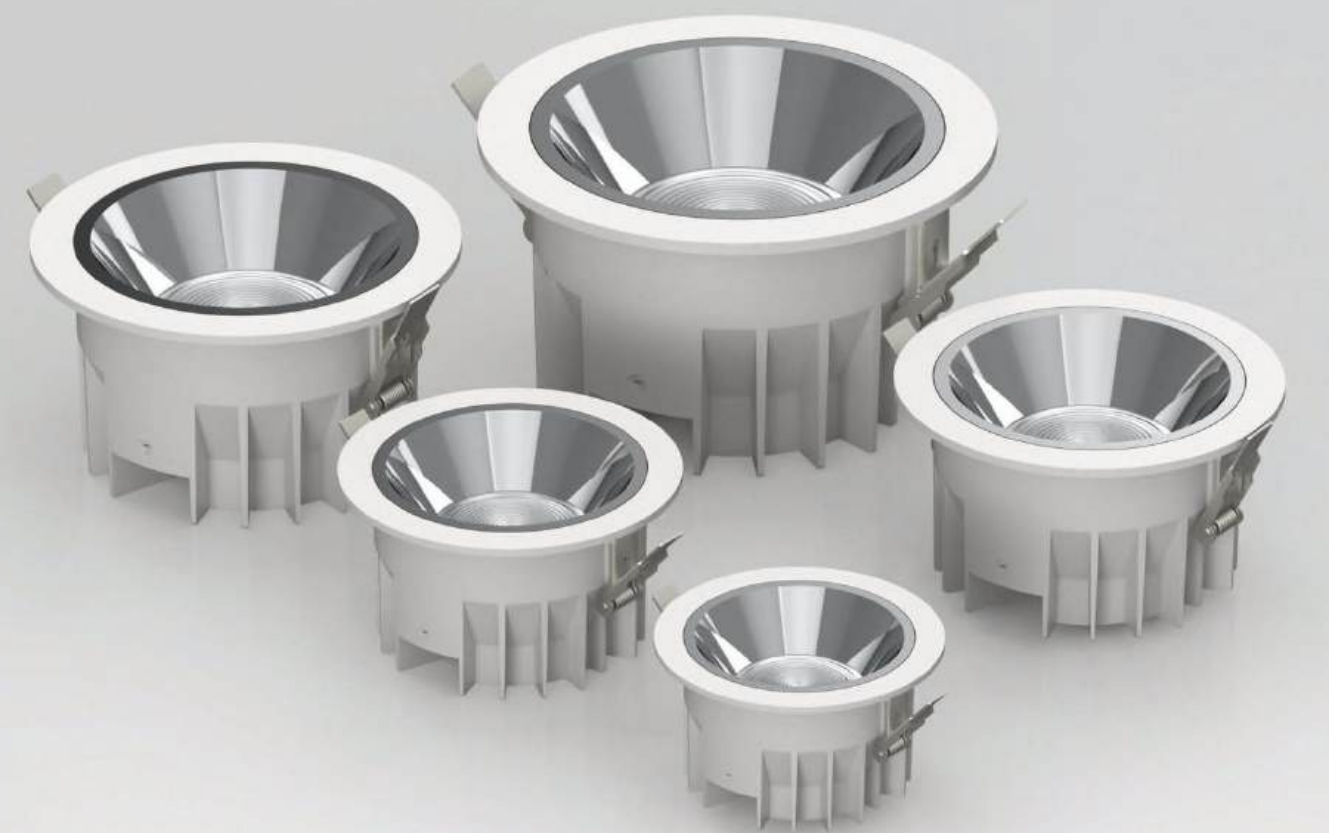


More Details




Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-3001E	Φ110	10W	2200K-6500K	AC100-277V	RA90	IP40
FBS-4001E	Φ140	20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-5001E	Φ170	30W	2200K-6500K	AC100-277V	RA90	IP40
FBS-6001E	Φ190	40W	2200K-6500K	AC100-277V	RA90	IP40
FBS-8001E	Φ230	50W	2200K-6500K	AC100-277V	RA90	IP40




RECESSED DOWNLIGHT SERIES

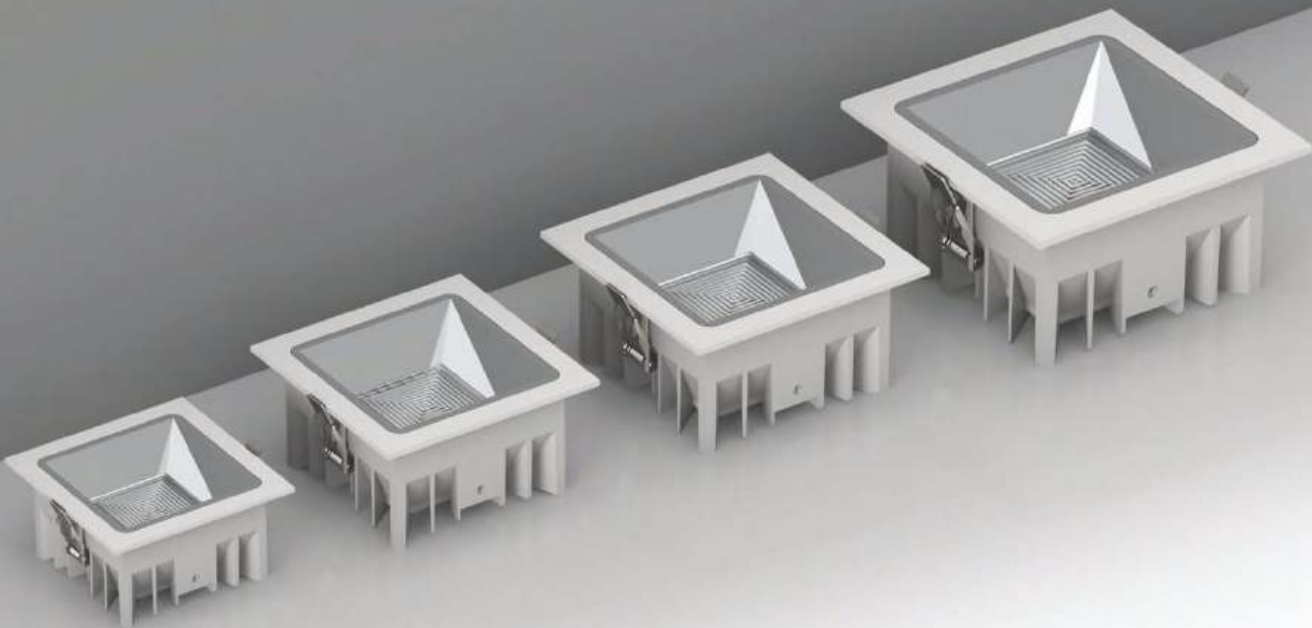

More Details

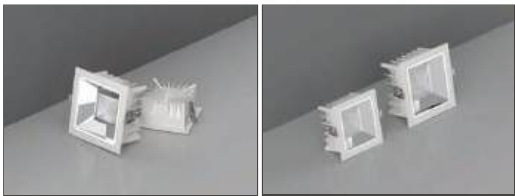

Model	Size	Power	CCT	Input volt.	CRI	IP Rating
FBS-3001F	115x115	10W	2200K-6500K	AC100-277V	RA90	IP40
FBS-4001F	140x140	20W	2200K-6500K	AC100-277V	RA90	IP40
FBS-5001F	160x160	30W	2200K-6500K	AC100-277V	RA90	IP40
FBS-6001F	195x195	40W	2200K-6500K	AC100-277V	RA90	IP40



SURFACE MOUNTED DOWNLIGHT

SURFACE MOUNTED DOWNLIGHT



Optical accessories Customizable
灯具配件 / Lighting Accessories 可定制



	FBS-2005L Beam Angle 20/45° Size $\Phi 90$ Power 9W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-5001L Beam Angle 20/45° Size $\Phi 170$ Power 36W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-3001L-1 Beam Angle 20/45° Size $\Phi 110 \times 110$ Power 20W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40

	FBS-3001L Beam Angle 20/45° Size $\Phi 110$ Power 15W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-6001L Beam Angle 20/45° Size $\Phi 195$ Power 45W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-4001L-1 Beam Angle 20/45° Size $\Phi 130 \times 130$ Power 30W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40

	FBS-4001L Beam Angle 20/45° Size $\Phi 132$ Power 24W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-2005L-1 Beam Angle 20/45° Size $\Phi 90 \times 90$ Power 9W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-5001L-1 Beam Angle 20/45° Size $\Phi 160 \times 160$ Power 40W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40

	FBS-2005R Beam Angle 60° Size $\Phi 90$ Power 9W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-5001R Beam Angle 60° Size $\Phi 170$ Power 36W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-3001T Beam Angle 60° Size $\Phi 110 \times 110$ Power 20W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40

	FBS-3001R Beam Angle 60° Size $\Phi 110$ Power 15W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-6001R Beam Angle 60° Size $\Phi 195$ Power 45W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-4001T Beam Angle 60° Size $\Phi 130 \times 130$ Power 30W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40

	FBS-4001R Beam Angle 60° Size $\Phi 132$ Power 24W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-2005T Beam Angle 60° Size $\Phi 90 \times 90$ Power 9W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40
	FBS-5001T Beam Angle 60° Size $\Phi 160 \times 160$ Power 40W CCT 2200K-6500K Input volt.AC100-277V CRI RA90 IP Rating IP40







SURFACE MOUNTED DOWNLIGHT



More Details




-High end supplier of commercial lighting in the world -

	FBS-2501K Beam Angle 20/40/60° Size $\Phi 72$ Power 10W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 		FBS-8001K Beam Angle 20/40/60° Size $\Phi 195$ Power 50W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 
	FBS-3001K Beam Angle 20/40/60° Size $\Phi 90$ Power 15W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 		FBS-2501K-1 Beam Angle 20/40/60° Size $\Phi 72$ Power 12W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 
	FBS-4001K Beam Angle 20/40/60° Size $\Phi 111$ Power 25W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 		FBS-3001K-1 Beam Angle 20/40/60° Size $\Phi 90$ Power 20W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 
	FBS-5001K Beam Angle 20/40/60° Size $\Phi 130$ Power 30W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 		FBS-4001K-1 Beam Angle 20/40/60° Size $\Phi 111$ Power 30W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 
	FBS-6001K Beam Angle 20/40/60° Size $\Phi 170$ Power 40W CCT 2200K-6500K Input volt. AC100-277V CRI RA90 IP Rating IP40 		

WATERPROOF SURFACE MOUNTED DOWNLIGHT



More Details






FBS-2501M-A

Beam Angle 20/40°

Size	Φ75
Power	10W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-4001M

Beam Angle 20/40°

Size	Φ115
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-2501M

Beam Angle 20/40°

Size	Φ75
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-5001M

Beam Angle 20/40°

Size	Φ140
Power	40-50W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-3001M-A

Beam Angle 20/40°

Size	Φ95
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-6001M

Beam Angle 20/40°

Size	Φ170
Power	50-60W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-3001M

Beam Angle 20/40°

Size	Φ95
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40






FBS-8001M

Beam Angle 20/40°

Size	Φ205
Power	60-1000W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



WATERPROOF WALL LAMP SERIES




-High end supplier of commercial lighting in the world -




FBS-2501M-B

Beam Angle	20/40°
Size	Φ75
Power	15W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40




FBS-4001B

Beam Angle	20/40°
Size	Φ115
Power	30W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



FBS-3001B

Beam Angle	20/40°
Size	Φ95
Power	20W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



TRACK LIGHT SERIES

FOCUSING TRACK LIGHT SERIES

Great contribution of the year

Guide rail series

Personalized light distribution, business first choice

Optical accessories Customizable



Reflective cups are available in gold, silver, black and white



Illumination angle can be matched with 15° 24° 38° SQUARE OVAL

15°-60°
Twist & Zoom

Heart-shaped Endless possibilities


With a new geometric lattice design concept of infinite splicing

Carrying 9 kinds of optical light distribution to meet the needs of various space light environment, for you to create a unique charm of the space
Bring you unparalleled imagination and value




FBS-918

Beam Angle	15/24/36°
Size	Φ71
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40

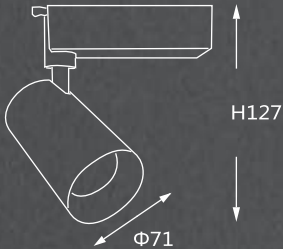

FBS-919

Beam Angle	15/24/36°
Size	Φ71
Power	25W
CCT	2200K-6500K
Input volt.	AC100-277V
CRI	RA90
IP Rating	IP40



POLARIZED RAIL LIGHT SERIES

Application effect

More Details




Beam Angle 15/23/38/60°




FBS-T915

Size $\Phi 72$ Input volt.AC100-277V
Power 7W CRI Ra 90
CCT 2200K-6500K IP Rating IP40




FBS-T916

Size $\Phi 92$ Input volt.AC100-277V
Power 25W CRI Ra 90
CCT 2200K-6500K IP Rating IP40




FBS-T917

Beam Angle 15/23/38/60° Input volt.AC100-277V
Size $\Phi 92$ CRI Ra 90
Power 25W IP Rating IP40
CCT




FBS-T915

Size $\Phi 72$ Input volt.AC100-277V
Power 15W CRI Ra 90
CCT 2200K-6500K IP Rating IP40



FBS-T916

Size $\Phi 92$ Input volt.AC100-277V
Power 25W CRI Ra 90
CCT 2200K-6500K IP Rating IP40



FBS-T917

Beam Angle 15/23/38/60° Input volt.AC100-277V
Size $\Phi 114$ CRI Ra 90
Power 40W IP Rating IP40
CCT 2200K-6500K

