



FXL SERIES

Linear LED Grow Lights - Dimmable



(FXL 600W featured)



(FXL 320W featured)

From hydroponic lettuces to ornamental flowers, Edisun has powerful greenhouse solutions that deliver the spectrum and intensity you need to drive yield and profit.

CONTACT US TODAY!

info@cm.lighting

1-877-826-5444



SPECIFICATIONS

CONTACT US TODAY!

info@cm.lighting

1-877-826-5444

FXL SERIES

Linear LED Grow Lights - Dimmable

GENERAL SPECIFICATIONS

VOLTAGE: AC 100-277V, 50/60Hz

BEAM ANGLE: 120°

BODY TEMP: ≤122°F

WATERPROOF: IP66 rating

POWER FACTOR: >0.97

OPERATING TEMP: -4 ~ +122°F

DIMMABLE: to 10%

RECOMMENDED MOUNTING HEIGHT: ≥12" Above Canopy

FXL - 320



INPUT POWER: 320W

LIGHT SOURCE: Lumileds 3030

DIMS: L24" x W2.9" x H3.7"

PPF: 850 umol/s (@277V)

EFFICACY: 2.63 umol/J (@277V)

WEIGHT: 11 lbs

FXL - 600



INPUT POWER: 600W


LIGHT SOURCE: Lumileds 3030

DIMS: L47" x W2.9" x H3.7"

PPF: 1608 umol/s (@277V)

EFFICACY: 2.65 umol/J (@277V)

WEIGHT: 19.4 lbs

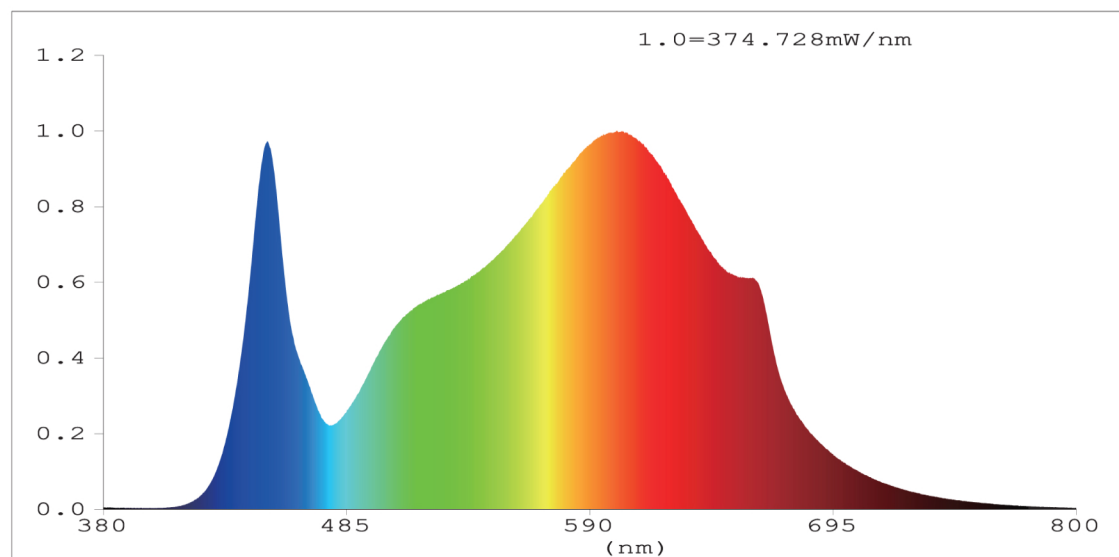

**ETL, DLC, IP66
listed with
50,000 hours
lifespan and
a 5-year
warranty**