


FLORCOAT 801

2 component, solvent free epoxy, coloured, gloss.

SYSTEM BUILD UP

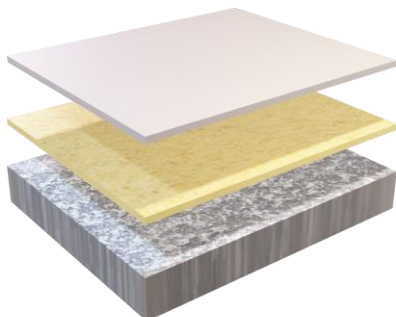

- Top Coat : Florcoat 801
- Primer : Florprime 180
- Substrate : Concrete, cementitious crete, magnesite creed, other moisture sensitive substrate.

FEATURES

- **Chemical resistant** – to most solvents, petroleum oils and commercial cleaning agents.
- **High solids** – high dry film thickness, durable.
- **Low VOC** – low odour, low pollution.
- **Solvent free** – nontoxic, environmentally friendly.
- **Easy application** – roller or spray can be used for fast installation.
- **High water vapor permeability** - Does not develop blisters in situations exposed to hydrostatic pressure.
- **Good adhesion** to concrete and other topping materials.

APPLICATION AREAS

- **Florcoat 801** is a two component, water-based epoxy coating which specifically formulated for application as a protective coating on various surfaces, including concrete, brick, block work, steel, timber, and laminates.
- It is particularly recommended for use in areas exposed to conditions like water condensation, high-pressure water cleaning, and vehicular traffic. Additionally, it is a suitable choice for wall coatings in pharmaceutical and food manufacturing environments.

PHYSICAL PROPERTIES

Product type	2 component, water-based epoxy
Color	Flortech standard
Finish	Gloss
Solid contents, mixed	74 %
Density, mixed	1.35 g/cm ³ @ 25 °C
Viscosity, mixed	1100 - 1700 cps 25 °C

PERFORMANCE DATA

Adhesive strength	> 1.5 N/mm ² , DIN ISO 4624
-------------------	--

PACKAGING

Components	Part A	Part B
TOTAL : 22 kg	17.8 kg	4.2 kg

APPLICATION GUIDE

Mixing ratio (by weight)	Part A : Part B 4.24 : 1	
Working time	Approximately 20-25 minutes @ 20 – 25 °C	
Application temperature	10 – 30 min °C (min 3 °C above dew point)	
Material consumption	0.25 – 0.30 kg/m ² on smooth surface 0.40 – 0.60 kg/m ² on broadcasted surface	
Following coating	Within 24 hours @ 25 °C	
Curing time	@ 25 °C	
	Foot traffic	After 6 – 8 hours
	Light traffic	After 3 days
	Exposure to chemicals	After 7 days

SUBSTRATE REQUIREMENT & PREPARATION

- Concrete substrate must be clean, free of laitance and contaminants and have tensile strength of 1.5 N/mm² minimum.
- Concrete should be dry and no ponded water.
- To achieve the ideal mechanical interlock, prepare the substrate by either captive shot blasting or diamond grinding to enhance the appropriate surface profile.
- Address any imperfections, including cracks and holes, by using an epoxy patching compound like **Florprime 110** where needed.
- Eliminate surface laitance, contaminants, coatings, curing compounds, and any weak or loose materials.

APPLICATION METHOD

- Prior to starting the application, ensure that the material temperature aligns with on-site conditions. The relative humidity should not exceed 85 %.
- Blend component A (resin) for 1-2 minutes. Pour the contents of component B (hardener) into component A. Use an appropriate mixer at a speed of 500 rpm to prevent excessive air from being introduced into the mixture. Continue mixing for 2 minutes.
- Spread the material onto the surface using a squeegee, and then follow up with back rolling using a short-nap roller in crisscross manner.

APPLICATION METHOD

- It is recommended to dilute with 3 % of water before use.
- Avoid applying the material too thickly and prevent any puddling. Provide adequate ventilation to keep relative humidity below 85 % during both application and curing, as excessive humidity can impede evaporation and negatively impact the curing process.

OVERCOATING

- The second coat can be applied within 24 hours without the need for grinding.
- However, if more than 24 hours elapse, light grinding is necessary before applying the overcoat.

STORAGE & SHELF LIFE

Shelf Life	12 months in closed original container.
Storage	Dry, well-ventilated space and avoid direct sunlight @ 10 – 30 °C.

DISCLAIMER

Although the information provided here is accurate and reflects our best knowledge and experience, please note that we do not provide any warranty, express or implied, regarding the recommendations made by us, our representatives, or distributors. This is because the conditions of product use and the level of professional competence required for its application are beyond our control.