



DIRECT CONNECT Series

Easier Automation from Flo-Tite



DM2000
API-607-7 Fire Safe
1/2"-4"



Optional
30° & 60° V-Ball
Control Valve
Available in:

- Flanged End
- 2 pc
- 3 pc

Model:

- DM-F15
- DMV-110
- DMV-2000




DM110
1/2"-3"

Design Features:

- Body: CF8M, 316SS
- Direct Mount - ISO 5211 Provides precise shaft alignment & eliminates the need for brackets and couplings
- Improved Seat Material - Extends cycle life and reduces torque
- Blowout-proof stem
- Anti-Static Device - Standard in all sizes
- Adjustable "Live-Loaded" Stem Seal

Bolted Packing Gland Design Provides Easy Adjustment of Stem Packing Even when "Direct Mounting" of Actuator is used.

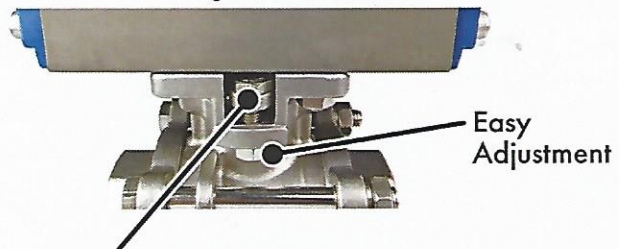

Stem Leak Detection Window Prevents Actuator Damage in the Event of Valve Stem Leakage.



DMMPT200
3-Way
1/2"-3"



DMW150
3/4"-6"



DMF15
1/2"-2"