

High-rise emergency

descending device

Please read carefully before installation.

1. Open the lid and then cover the iron plate. 4 holes are marked, and a drill 11 cm deep hole with a drill bit with a diameter of 14.

2. The expansion screw passes through the hole of the fixed ring, passes through the iron

plate hole of the picture frame, and fixes the picture frame of the fixed ring. At this time, the picture frame is fixed.

3. Use a safety hook to attach the mounting ring to tighten the safety screw.

4. Untie the tie on the steel wire plate, pull the seat belt, and check whether the installation is correct and whether the screws are tight.

Please follow the instructions below when an emergency occurs.


A. Pull down the seat belt, release the seat belt up, put the seat belt under your armpit, then move the seat belt to your chest, lock it tightly, and fall from the window or balcony. The window or balcony can be lowered. The descent speed is between 0.7-1.2 meters per second, and the load is 20-130 kg.

B. This equipment is a reciprocating retarder. After one end reaches the ground in emergency use, the wire rope at the other end is upstairs. Pull down the wire rope, hang it into the wire rope port with a safety hook, hang it into the seat belt, release the safety buckle up, then put the seat belt under the armpit, then lock the safety buckle to the chest, and drop again.


Choose a strong wall before installation.

When the second person wants to fall, be sure to pull out the other end of the wire rope, hang the seat belt and tie it under his armpit, and then fall.

Main component 1 governor, main function of deceleration, material: stainless steel/aluminum, carbon steel 2. 3 seat belts (two big and one small) 3. 4 safety hooks (3 large and one small) 4. Several meters of wire rope (number of meters as required) 5. 4 expansion screws, 6 fixing blocks 7. Gloves 1 pair 8. Picture frame or suitcase (choose one of two)

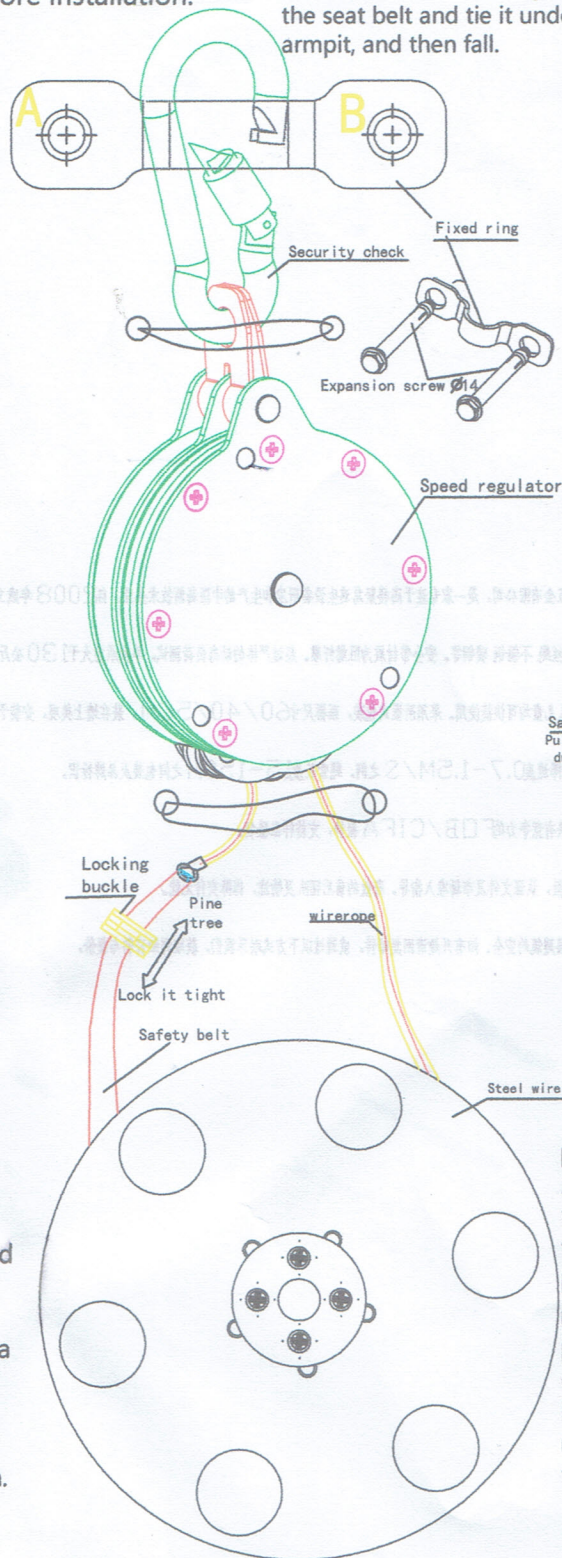

PICTURE FRAME SIZE: 40/60/5CM, OVERALL WEIGHT AVERAGE 8KG. The length of wire rope is 15/25/35/45/60 meters. Precision punching molds will be equipped when installing, which is more convenient and fast to install.



The interior of the governor has been adjusted, and there is no need to maintain it after installation. Only after use, the wire rope should be rolled up, and it should not be messy to avoid winding. The warranty period is 20 years.

