

# LED Angle Adjustable Wallpack Fixture



## Features & Essential Specs

### Features:

- Field Selectable Wattage & CCT
- Wet Location Rated
- Adjustable Aiming Angle from 0° to +90°
- Detachable Housing For Easy Installation
- EM battery & Control Options Available

### Applications:

- Commercial Exteriors
- Schools
- Hospitals
- Storage Facilities

### Essential Specs:

- Selectable Wattages:  
40W - 16/24/32/40W  
80W - 32/48/64/80W
- Selectable CCT's: 3000/4000/5000k
- Input Voltage: 120-277VAC
- Lumen Output: Variable (Shown Below)
- Dimming: 0-10V Dimming
- Mounting: Wall Surface or Conduit
- Housing: Die-cast Aluminum
- Operating Temp: -40° to 104° F

Additional Detailed Specs On Next Page

# LED Full Cut-Off Wallpack Fixture



## PERFORMANCE DATA

CLS-MS-WP10-40W27DDKD								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	40W	70	5600lm	140lm/W	6200lm	155lm/W	5800lm	145lm/W
80%	32W	70	4700lm	147lm/W	5100lm	159lm/W	4800lm	150lm/W
60%	24W	70	3700lm	154lm/W	3950lm	165lm/W	3800lm	158lm/W
40%	16W	70	2600lm	163lm/W	2800lm	175lm/W	2650lm	166lm/W

CLS-MS-WP10-80W27DDKD								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	80W	70	11200lm	140lm/W	12200lm	153lm/W	11500lm	144lm/W
80%	64W	70	9300lm	145lm/W	10100lm	158lm/W	9600lm	150lm/W
60%	48W	70	7300lm	152lm/W	7800lm	163lm/W	7500lm	156lm/W
40%	32W	70	5050lm	158lm/W	5400lm	169lm/W	5200lm	163lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	640	40	120	0.33
		40	208	0.19
		40	240	0.17
		40	277	0.14
1	2120	80	120	0.67
		80	208	0.38
		80	240	0.33
		80	277	0.29


Additional Detailed Specs On Next Page

# LED Full Cut-Off Wallpack Fixture




## DIMENSIONS

40W UNIT

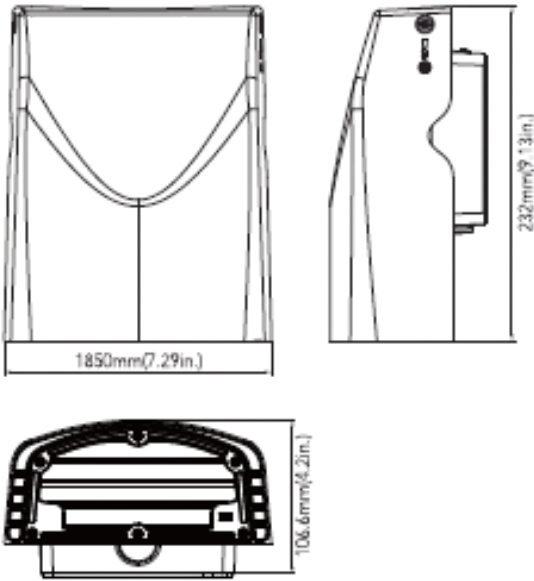

80W UNIT

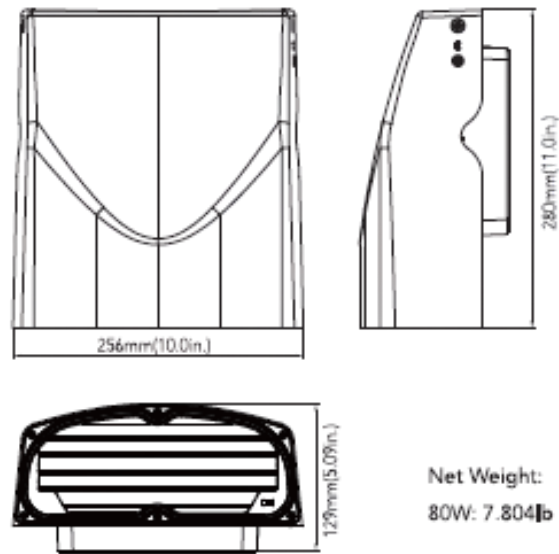

Net Weight:  
80W: 7.804lb

### EMERGENCY BACKUP OPTION: CLS-MS-WP17-EM



### STANDARD PHOTOCELL OPTION: CLS-MS-WP-Photocell

