

LED Canopy Fixture Round



Features & Essential Specs



Features:

- Field Selectable Wattage & CCT
- Wet Location Rated
- High Efficacy LED Chips
- Slim Design With Durable Housing
- EM battery & Sensor Options Available

Applications:

- Retail Stores
- Parking Structures
- Walkways
- Drive-Up Canopies

Essential Specs:

- Selectable Wattages: 22/34/46/60
- Selectable CCT's: 4000/5000k
- Input Voltage: 120-277VAC
- Lumen Output: 164lm/W
- Dimming: 0-10V Dimming
- Mounting: Surface or Conduit
- Housing: Die-cast Aluminum
- Operating Temp: -40° to 113° F

Additional Detailed Specs On Next Page

LED Canopy Fixture Round



PERFORMANCE DATA

CLS-MS-CPR-60W27VDDKWD					
SETTING	SETTING WATTS	4000K (70CRI)		5000K (70CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	60W	7700lm	128lm/W	7500lm	125lm/W
80%	46W	6500lm	141lm/W	6300lm	137lm/W
60%	34W	5000lm	147lm/W	4900lm	134lm/W
40%	22W	3600lm	164lm/W	3500lm	159lm/W


ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1050	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22

DIMENSIONS




84.3mm(3.32in)

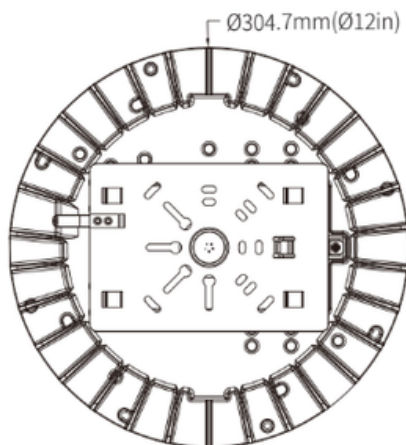

Ø304.7mm(Ø12in)

PHOTOMETRICS

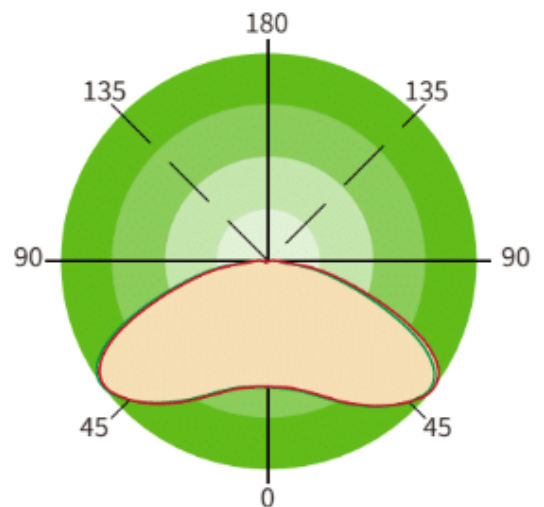

Network Compatible

