

LED Full Cut-Off Wallpack Fixture



Features & Essential Specs

Features:

- Field Selectable Wattage & CCT
- Wet Location Rated
- Zero Glare Optics So Light Only Goes Down
- Detachable Housing For Easy Installation
- EM battery & Control Options Available

Applications:

- Commercial Exteriors
- Schools
- Hospitals
- Storage Facilities

Essential Specs:

- Selectable Wattages:
38W - 16/23/30/38W
65W - 23/34/49/65W
100W - 42/61/84/100W
- Selectable CCT's: 3000/4000/5000k
- Input Voltage: 120-277VAC
- Lumen Output: Variable (Shown Below)
- Dimming: 0-10V Dimming
- Mounting: Wall Surface or Conduit
- Housing: Die-cast Aluminum
- Operating Temp: -40° to 104° F

Additional Detailed Specs On Next Page

LED Full Cut-Off Wallpack Fixture



PERFORMANCE DATA


CLS-MS-WP15-38W27VDDKDP			CLS-MS-WP15-65W27VDDKDP			CLS-MS-WP15-100W27VDDKDP		
SYSTEM WATTS	VOLTAGE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
38W	120-277VAC	70	5600lm	147 lm/W	6000lm	158 lm/W	5700lm	150 lm/W
65W	120-277VAC	70	9500lm	146 lm/W	10000lm	154 lm/W	9700lm	149 lm/W
65W	347-480VAC	70	9400lm	145 lm/W	9900lm	152 lm/W	9500lm	146 lm/W
100W	120-277VAC	70	14800lm	148 lm/W	15500lm	155 lm/W	15000lm	150 lm/W
100W	347-480VAC	70	14000lm	140 lm/W	15000lm	150 lm/W	14500lm	145 lm/W

ELECTRICAL DATA


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)		
1	680	38	120	0.32		
		38	208	0.18		
		38	240	0.16		
		38	277	0.14		
1	980	65	120	0.54		
		65	208	0.31		
		65	240	0.27		
		65	277	0.23		
	1850	65	347	0.19		
		65	480	0.14		
		1	850	100	120	0.83
				100	208	0.48
100	240			0.42		
100	277			0.36		
2520	100		347	0.29		
	100		480	0.21		

DIMENSIONS

38 & 60W UNITS

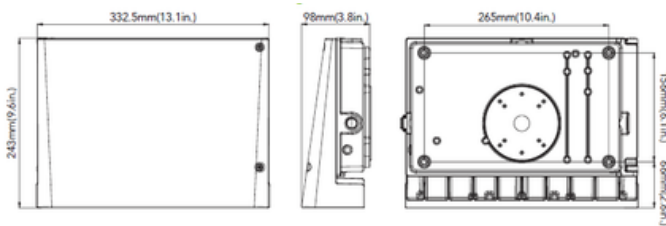

100W UNIT

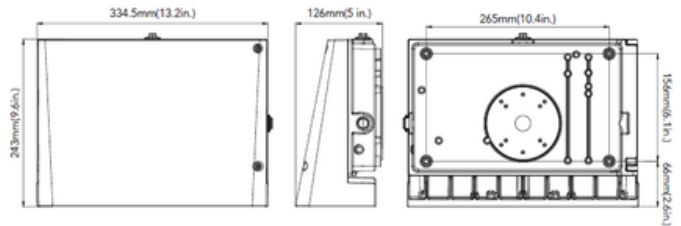

Additional Detailed Specs On Next Page

LED Full Cut-Off Wallpack Fixture



**EMERGENCY BACKUP OPTION:
CLS-MS-WP17-EM**



**NETWORK MOTION/PHOTOCELL CONTROL OPTION:
CLS-KN-EFS106-AUX-W.B2**



**STANDARD PHOTOCELL OPTION:
CLS-MS-WP-Photocell**

