

LED Linear High Bay Fixture



Features & Essential Specs



Features:

- Field Selectable Wattage & CCT
- Damp Location Rated
- High Efficacy LED Chips
- Slim Design With Durable Housing
- EM battery & Sensor Options Available

Applications:

- Warehouses
- Gymnasiums
- Retail Stores
- Manufacturing Spaces

Essential Specs:

- Selectable Wattages: 100/130/180/210
- Selectable CCT's: 4000/5000k
- Input Voltage: 120-277VAC
- Lumen Output: 158lm/W
- Dimming: 0-10V Dimming
- Mounting: Surface / Conduit / Cable
- Housing: Cold-Rolled Steel Plating
- Operating Temp: -40° to 122° F

Additional Detailed Specs On Next Page

LED Linear High Bay Fixture




PERFORMANCE DATA

CLS-MS-LH6-210W27VDDK					
SETTING	SYSTEM WATTS	4000K		5000K	
		LUMENS (70CRI)	LPW (70CRI)	LUMENS (70CRI)	LPW (70CRI)
100%	210W	31000lm	148lm/W	30500lm	145lm/W
80%	180W	27500lm	153lm/W	27000lm	150lm/W
60%	130W	20600lm	158lm/W	20000lm	154lm/W
40%	100W	16500lm	165lm/W	16000lm	160lm/W


ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1000	210	120	1.75
		210	208	1.01
		210	240	0.88
		210	277	0.76
		210	347	0.61
		210	480	0.44

DIMENSIONS

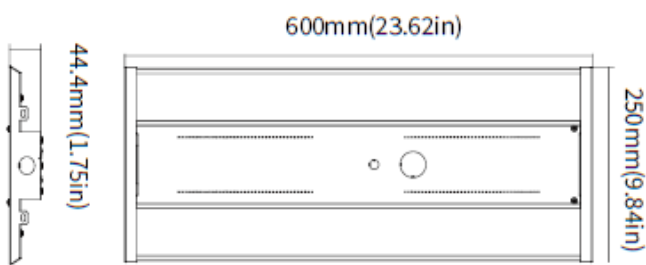

PHOTOMETRICS

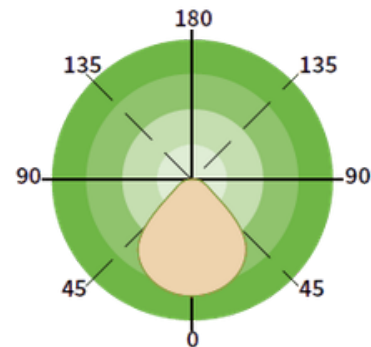

Bluetooth Motion Sensor Option:
CLS-KN-EFS106-AUX-C1



Emergency Battery Option:
CLS-ZY-BLD-HM15D



Network Compatible

