

Standard LED Troffer Fixture



Features & Basic Specs

Features:


- Field Selectable Wattages
- Field Selectable CCT
- High Efficacy LED Chips
- Sleek Modern Housing Design
- Emergency Backup & Network Control Capable

Essential Specs:

- Selectable Wattages:
2X2 - 15/25/36W 2X4 - 40/45/50W
- Selectable CCT's: 3500/4000/5000K
- Input Voltage: 120-277VAC
- Lumen Output: 140lm/W

Applications:

- Offices
- Hallways
- Schools
- Hospitals

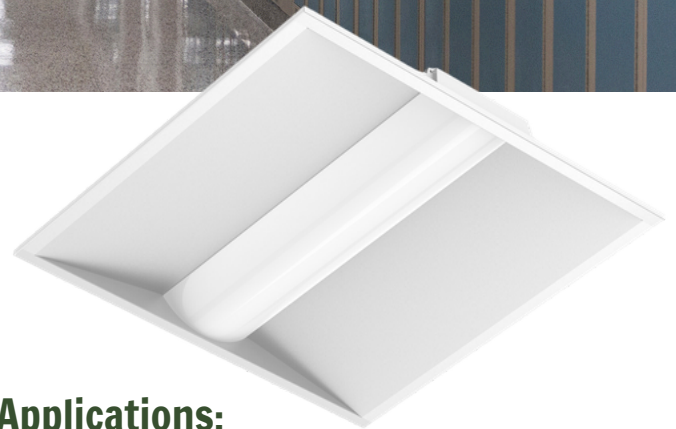

Additional Detailed Specs On Next Page


Standard LED Troffer Fixture



CLS-ZY-TR-2X2-36W-DM-ADJ | CLS-MN-TR-2X4-50W-DM-ADJ

Input Voltage: 120-277VAC	Available Wattages: 15/25/36/40/45/50	Control Receptacle (2X4 Only): 2.5mm*11mm, Twist-in
Beam Angle: 113°	Color Rendering Index(CRI): ≥83	Lifespan: 50,000 hours
Lens Type: Frosted	Mounting Type : Recessed / Surface Mount w/ Surface Mount Kits (Below)	Pieces Per Case: 2

DIMENSIONS

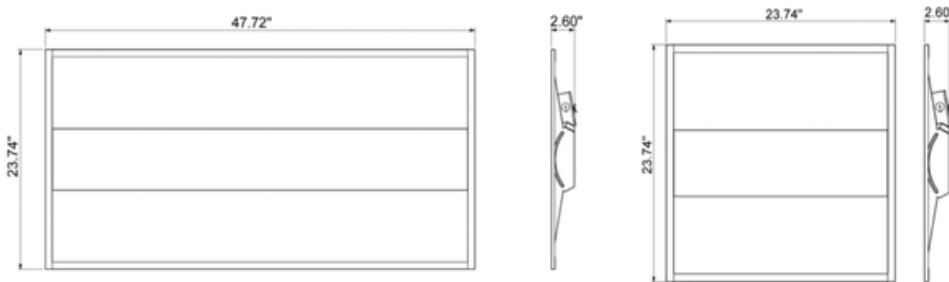

Surface Mount Kit Options

2x2

CLS-ZY-PNL-SMK2x2

2x4

CLS-ZY-PNL-SMK2x4

Bluetooth Motion Sensor Option:
CLS-KN-IFS108-AUX-B1



Emergency Battery Option:
CLS-ZY-BLD-HM15D

