

# LED Standard Wallpack Fixture



## Features & Essential Specs

### Features:

- Field Selectable Wattage & CCT
- Wet Location Rated
- Adjustable Light Throw Dial
- Detachable Housing For Easy Installation
- EM battery & Control Options Available

### Essential Specs:

- Selectable Wattages:  
60W - 24/36/48/60W  
100W - 40/60/80/100W  
150W - 60/90/120/150W
- Selectable CCT's: 3000/4000/5000k
- Input Voltage: 120-277VAC

### Applications:

- Commercial Exteriors
- Schools
- Hospitals
- Storage Facilities

- Lumen Output: Variable (Shown Below)
- Dimming: 0-10V Dimming
- Mounting: Wall Surface or Conduit
- Housing: Die-cast Aluminum
- Operating Temp: -40° to 104° F

Additional Detailed Specs On Next Page

# LED Standard Wallpack Fixture



## PERFORMANCE DATA

### CLS-WP17-60W27VDDKD


SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
Level 1	60W	80	8500lm	142lm/W	8700lm	145lm/W	8700lm	145lm/W
Level 2	48W	80	7100lm	148lm/W	7300lm	152lm/W	7300lm	152lm/W
Level 3	36W	80	5600lm	156lm/W	5800lm	161lm/W	5800lm	161lm/W
Level 4	24W	80	4050lm	169lm/W	4150lm	173lm/W	4150lm	173lm/W

### CLS-WP17-100W27VDDKD

SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
Level 1	100W	80	13500lm	135lm/W	14200lm	142lm/W	13800lm	138lm/W
Level 2	80W	80	11400lm	143lm/W	12000lm	150lm/W	11600lm	145lm/W
Level 3	60W	80	8700lm	145lm/W	9400lm	157lm/W	9000lm	150lm/W
Level 4	40W	80	6200lm	155lm/W	6600lm	165lm/W	6400lm	160lm/W

### CLS-WP17-150W27VDDKD

SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
Level 1	150W	80	20500lm	137lm/W	22300lm	149lm/W	22300lm	149lm/W
Level 2	120W	80	17200lm	143lm/W	18500lm	154lm/W	18500lm	154lm/W
Level 3	90W	80	13400lm	149lm/W	14500lm	161lm/W	14500lm	161lm/W
Level 4	60W	80	9500lm	158lm/W	10000lm	167lm/W	10000lm	167lm/W

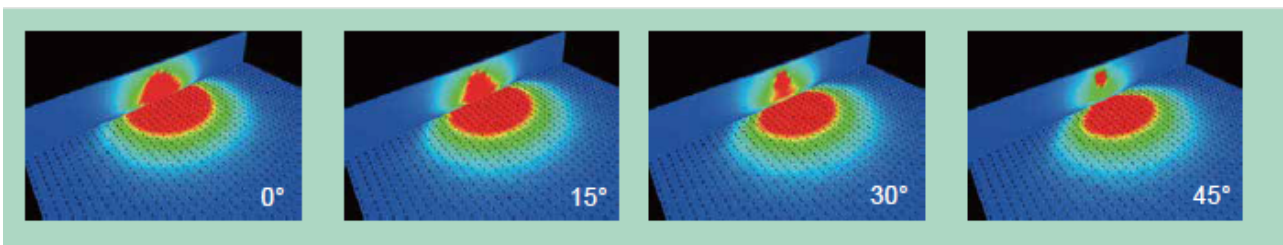

Control the light throw with the spin of a dial!

All WP17 models include a powerful feature that can adjust the tilt of the light engine, enabling field adjustment of the degree of light thrown forward.

Choose 0°, 15°, 30°, or 45° to control where the light gets thrown.

Additional Detailed Specs On Next Page


WWW.CLEARLINELIGHTING.COM

# LED Standard Wallpack Fixture




## DIMENSIONS

Medium Size: 60W/100W

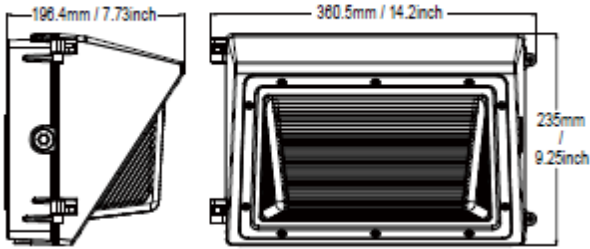

Large Size: 150W

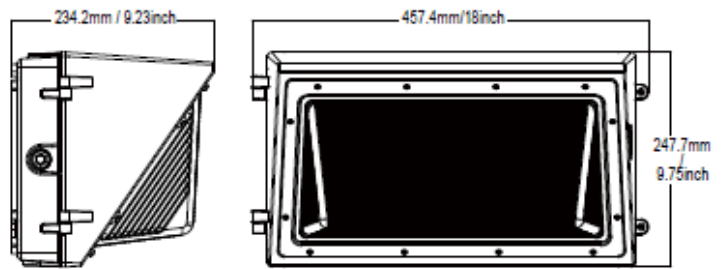

**EMERGENCY BACKUP OPTION:  
CLS-MS-WP17-EM**



**NETWORK MOTION/PHOTOCELL CONTROL OPTION:  
CLS-KN-EFS106-AUX-W.B2**



**STANDARD PHOTOCELL OPTION:  
CLS-MS-WP-Photocell**



Network Compatible

