

LED T8 Tubes



Features & Basic Specs

Features:

- Light Guider Connector For Seamless Linking
- Suitable For Enclosed Fixtures
- High Efficacy LED Chips
- Slim Design With Durable Housing
- Easy Mounting Clip Design

Applications:

- Hospitals
- Schools
- Offices
- Warehouses

Essential Specs:

- Selectable Or Set Wattages:
2/3Ft - 10/12/14W
4Ft - 14/18/20W
8Ft - 40W
- Input Voltage: 120-277VAC
- Lumen Output: 150lm/W
- Dimming: Non-Dimmable
- Mounting: T8 Tube Fixture
- Housing: Aluminum & Polycarbonate
- Operating Temp: -3° to 113° F

Additional Detailed Specs On Next Page

LED T8 Tubes



2FT


3FT

4FT

8FT

CLS-MN-T8-2F3W5CB FR | CLS-MN-T8-3F3W5CB FR | CLS-MN-T8-4F3W5CAB FR | CLS-MN-T8-40W2400B 50K FR

Input Voltage: 120-277VAC	Available Wattages: 10/12/14/18/20/40W	Available Lengths: 2Ft - 3Ft - 4FT - 8FT	Lens Type: Frosted
Ballast Dependency: 2/3Ft - Ballast Bypass 4Ft - Ballast Bypass Or Ballast Compatible 8Ft - Ballast Bypass	Available End Types: G13 Bi-Pin 2/3/4Ft R17D HO - 8Ft Only FA8 - 8FT Only	Pieces Per Case: 25pcs - 2/3/4Ft Tubes 15pcs - 8FT Tubes	Lifespan: 50,000 hours

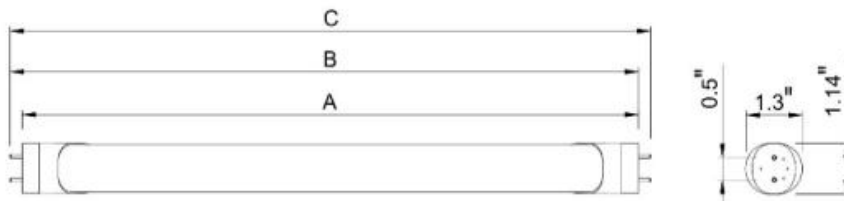


DIMENSIONS 2FT


A	23.15 inch
B	23.4 inch
C	/

Wiring & Linking Diagram

4FT ONLY

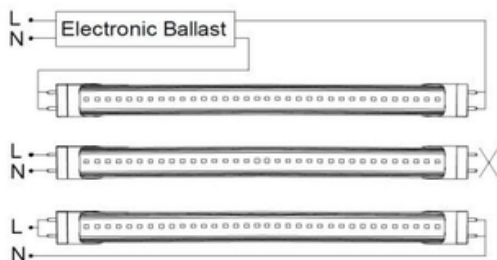

2/3/4/8FT ONLY

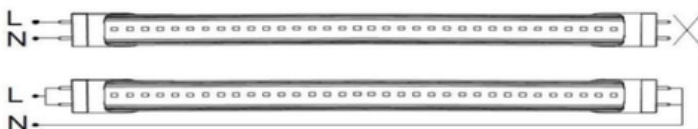

3FT

A	35.13 inch
B	35.14 inch
C	/

4FT

A	47.13 inch
B	47.4 inch
C	/

8FT

A	96 inch
B	96.2inch
C	/

