

# LED Commercial Floodlight Fixture



## Features & Essential Specs

### Features:

- Field Selectable Wattage & CCT
- Wet Location Rated
- High Efficacy LED Chips
- Slim Design With Durable Housing
- EM battery & Sensor Options Available

### Essential Specs:

- Selectable Wattages: 11/15/20/27W
- Selectable CCT's: 3000/4000/5000k
- Input Voltage: 120-277VAC
- Lumen Output: 130lm/W

### Applications:

- Building Exteriors
- Billboards
- Landscape Lighting
- Display Lighting



Additional Detailed Specs On Next Page

# LED Commercial Floodlight Fixture



## PERFORMANCE DATA


### CLS-MS-FL-27W27VDDKD XX B77

SYSTEM WATTS	VOLTAGE	DIST. TYPE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
27W	120-277V	7Hx7V	70	3500lm	130 lm/W	3800lm	141 lm/W	3600lm	133 lm/W


## ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	450	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10

## DIMENSIONS

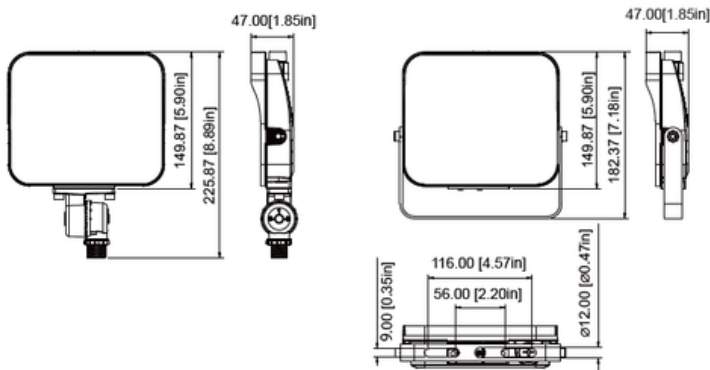


## PHOTOMETRICS

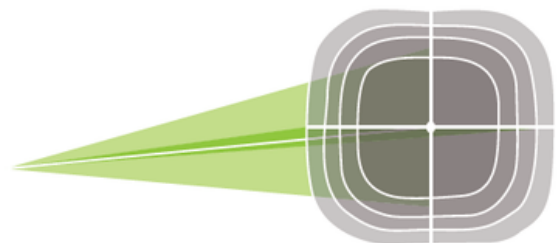

## Mounting Options

1/2" NPS Knuckle Mount



Trunnion Mount

