


# DATASHEET

## Thermal Protector P08

### Type series 08

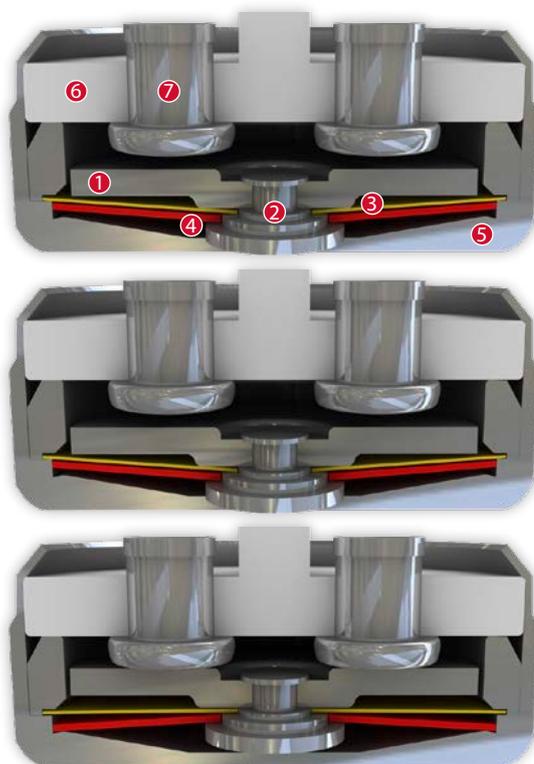

### Construction and function



Switchgear consisting of a mobile and circular contact bridge (1), a contact bearing pin (2), a spring snap-in disc (3) and a bimetallic disc (4) which is riveted into one another, undetachable and fixed in a positive lock and self-aligning between a non-conductive floor of a housing (5) and an insulating ceramic bearing (6) with two integrated stationary contacts (7) as electrodes. At the same time, the switchgear is initially held open by the spring snap-in disc (3) with the contact bridge (1) acting as a transfer element for electric current after the switching process) which is fastened between a supporting collar and a circumferential ring. As such, the bimetallic disc (4) underlying it, that is also stuck out from the contact bearing pin (2), can continuously work (exposed) by mechanical loads without the distance between the contact surfaces (defined by the spring snap-in disc (3)) diminishing. As soon as the bimetallic disc (4) reaches its rated switching temperature, it effectively springs against the throw force of the spring snap-in disc (3) into its inverted position. The contacts (7) are abruptly closed. The temperature will now fall. The bimetallic disc (4) will only snap back upon reaching a defined spring back temperature and the contacts will be abruptly opened again. As a result of the dimensioning of the contact bearing pin (2), an easy, circular rotation of the circle-shaped contact bridge (1) is enabled with every switch so that transfer resistances remain constantly below the minimum limit after many switch cycles and the long term stability is sustained even under high levels of stress.

### Features:

Small dimensions	with constant distance of the contacts in the whole range between switching temperature and reset temperature
Quick response sensitivity	as contact-carrying part
Excellent long term performance	< 1 ms
Very short bouncing times	always with the same contact pressure up to reset point; resulting in low contact stress
Instantaneous switching	due to fine silver contacts; reproducible switching temperature values due to tempered, electrically and mechanically unstressed bimetallic disc
Temperature resistance	by use of high temperature resistant materials and components



**P08**

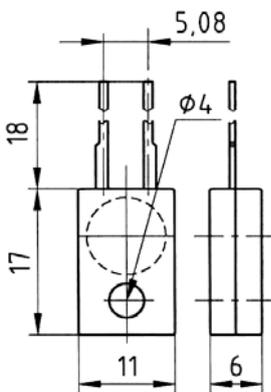

Installation height h	from 6,0 mm
Housing size (length/width)	17,0 mm / 11,0 mm
Length of the connection pins	18,0 mm
Fixing/Max. torque	3,0 Nm

Type: Normally open; resets automatically; with connection pins; with epoxy; fully insulated in the attachment housing

Nominal switching temperature (NST) in 5 °C increments	70 °C - 180 °C	
Tolerance (standard)	±5 K	
Reverse Switch Temperature (defined RST is possible at the customer's request)	UL	≥ 35° C (≤ 95° C NST)
	VDE	-50 K ± 15 K (≥ 100° C ≤ 180° C NST)
		≥ 35 °C
Installation height	from 6,0 mm	
Housing size (length/width)	17,0 mm / 11,0 mm	
Length of the connection pins	18,0 mm	
Fixing/Max. torque	3,0 Nm	
Resistance to impregnation *	suitable	
Suitable for installation in protection class	I + II	
Pressure resistance to the switch housing *	600 N	
Standard connection	Lead wire 0,75 mm <sup>2</sup> / AWG18	
Available approvals (please state)	IEC; ENEC; VDE; UL; CSA; CQC	
Operating voltage range AC	up until 500 V AC	
Rated voltage AC	250 V (VDE) 277 V (UL)	
Rated current AC cos φ = 1.0/cycles	10,0 A / 10.000	
Rated current AC cos φ = 0.6/cycles	6,3 A / 10.000	
High voltage resistance	2,0 kV	
Total bounce time	< 1 ms	
Contact resistance (according to MIL-STD. R5757)	≤ 50 mΩ	
Vibration resistance at 10 ... 60 Hz	100 m/s <sup>2</sup>	

**Ordering example:**



**Marking example:**



\*In accordance with the Thermik test - Specifications relating to part applications (on the part of the buyer) which deviate from our standards are not checked for their capacity to support an application and/or conformity with standards. The responsibility for testing the suitability of Thermik products for such applications falls upon the user. - Slight deviations are possible in terms of dimensions / values, depending on the embodiment of the product. - We reserve the right to make technical changes in the course of further development. - Details concerning certain data, measurement methods, applications, approvals, etc. can be supplied upon request.

**More varieties of the type series 08:**

- C08 – with connector cables; with epoxy; without insulation
- S08 – with connector cables; with epoxy; insulation: Mylar®-Nomex®
- L08 – with connector cables; with epoxy; fully insulated in a screw on housing
- H08 – with connector cables; with epoxy; fully insulated in the attachment housing
- V08 – with connector cables and double-insulated in the attachment housing

- [www.thermik.de/data/C08](http://www.thermik.de/data/C08)
- [www.thermik.de/data/S08](http://www.thermik.de/data/S08)
- [www.thermik.de/data/L08](http://www.thermik.de/data/L08)
- [www.thermik.de/data/H08](http://www.thermik.de/data/H08)
- [www.thermik.de/data/V08](http://www.thermik.de/data/V08)