




BY JOHNSON CONTROLS



***Model YLAA Air-Cooled Scroll Compressor Liquid Chillers  
Style B***

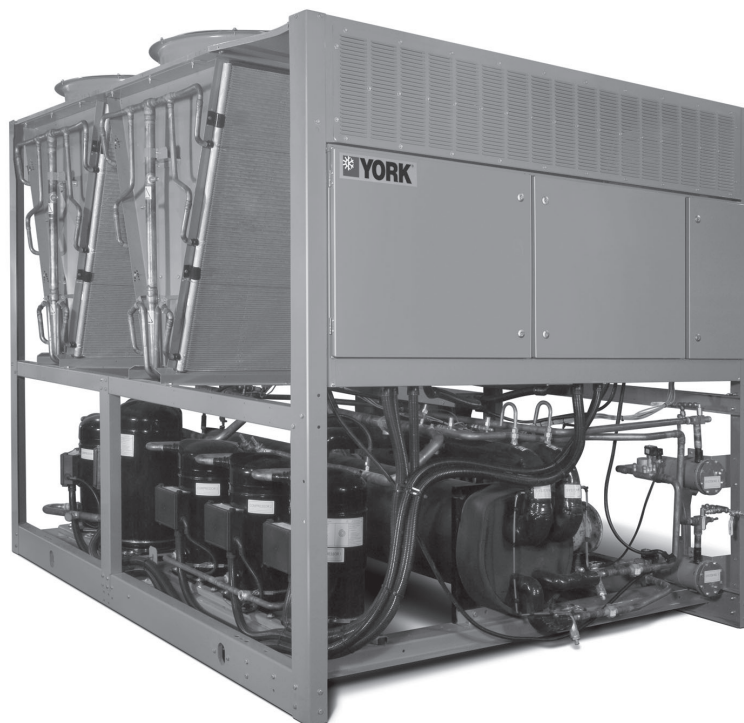

**Round Tube Condenser Coils**

**246 – 527 kW**

**60 Hz**

**R-410A**



# Table of Contents

---

|                                               |    |
|-----------------------------------------------|----|
| Form 150.62-EG5 (509).....                    | 1  |
| Specifications .....                          | 3  |
| Microcomputer Control Center .....            | 4  |
| Accessories and Options .....                 | 6  |
| Major Unit Components .....                   | 8  |
| Nomenclature.....                             | 9  |
| Design Parameters.....                        | 10 |
| Water Pressure Drop.....                      | 11 |
| Selection Criteria and Procedures.....        | 12 |
| Pump Selection Criteria .....                 | 14 |
| Pump Pressure Drop Curves.....                | 16 |
| Single Pump Curves.....                       | 18 |
| Dual Pump Curves.....                         | 19 |
| Ratings - 60 Hz.....                          | 20 |
| Part Load Ratings – Standard Efficiency ..... | 28 |
| Part Load Ratings – High Efficiency.....      | 29 |
| Physical Data - English.....                  | 30 |
| Dimensions – Four Fan Units.....              | 32 |
| Dimensions – Six Fan Units .....              | 33 |
| Dimensions – Eight Fan Units.....             | 34 |
| Isolator Locations.....                       | 35 |
| Isolator Details.....                         | 37 |
| Electrical Notes.....                         | 40 |
| Electrical Data w/o Pumps.....                | 42 |
| Electrical Data w/ Pumps.....                 | 44 |
| Wiring Diagram .....                          | 52 |
| Elementary Wiring .....                       | 54 |
| Condenser Fan Mapping and Sequencing.....     | 56 |
| Compressor Wiring .....                       | 57 |
| Power Options Connection Diagram .....        | 58 |
| Power Panel .....                             | 59 |
| Dual Pump Wiring.....                         | 60 |
| Wiring .....                                  | 61 |
| MicroPanel Connections.....                   | 62 |
| Application Data .....                        | 65 |
| Guide Specifications .....                    | 66 |


# Specifications

## GENERAL

The 70 - 150 Ton (246 - 527kW) **YLAA** models are shipped complete from the factory ready for installation and use.

The unit is pressure-tested, evacuated, and fully charged with a zero Ozone Depletion Potential Refrigerant R-410A and includes an initial oil charge. After assembly, a complete operational test is performed with water flowing through the evaporator to assure that the refrigeration circuit operates correctly.

The unit structure is heavy-gauge, galvanized steel. This galvanized steel is coated with baked-on powder paint, which, when subjected to ASTM B117 1000 hour, salt spray testing, yields a minimum ASTM 1654 rating of "6". Units are designed in accordance with NFPA 70 (National Electric Code), ASHRAE/ANSI 15 Safety code for mechanical refrigeration, ASME and rated in accordance with ARI Standard 550/590.

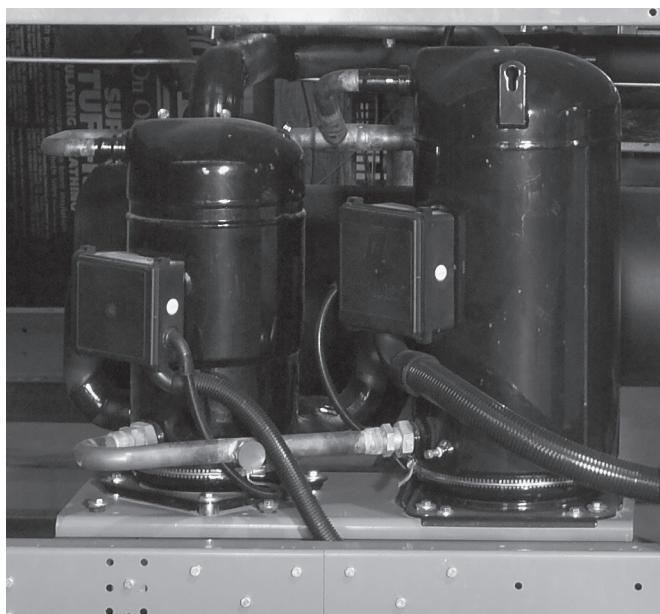


## COMPRESSORS

The chiller has suction-gas cooled, hermetic, scroll compressors. The YLAA compressors incorporate a compliant scroll design in both the axial and radial direction. All rotating parts are statically and dynamically balanced. A large internal volume and oil reservoir provides greater liquid tolerance. Compressor-crankcase heaters are also included for extra protection against liquid migration.

## EVAPORATOR

The evaporator is equipped with a heater controlled by a separate thermostat. The heater provides freeze protection for the evaporator down to -20°F (-29°C) ambient. The evaporator is covered with 3/4" flexible, closed-cell,




foam insulation ( $K=0.25$ ).

The water baffles are constructed of brass to resist corrosion. The removable heads allow access to the internally enhanced, seamless, copper tubes. Vent and drain connections are included.

Water inlet and outlet connections are grooved for compatibility with field supplied ANSI/AWWA C-606 couplings.

## CONDENSER

**Coils** – Fin and tube condenser coils of seamless, internally-enhanced, high-condensing-coefficient, corrosion resistant copper tubes are arranged in staggered rows,

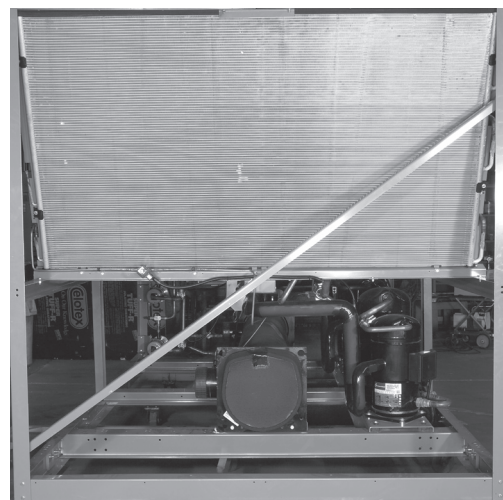

mechanically expanded into aluminum fins. Integral sub-cooling is included. The design working pressure of the coil is 650 PSIG (45 barg).

**Fans** – The condenser fans are composed of corrosion resistant aluminum hub and glass-fiber-reinforced polypropylene composite blades molded into a low-noise airfoil section. They are designed for maximum efficiency and are statically and dynamically balanced for vibration-free operation. They are directly driven by independent motors, and positioned for vertical air discharge. The fan guards are constructed of heavy-gauge, rust-resistant, coated steel. All blades are statically and dynamically balanced for vibration-free operation.


**Motors** – The fan motors are Totally Enclosed Air-Over, squirrel-cage type, current protected. They feature ball bearings that are double-sealed and permanently lubricated.

# Microcomputer Control Center

All controls are contained in a NEMA 3R/12 cabinet with hinged outer door and includes:

Liquid Crystal Display with Light Emitting Diode back-lighting for outdoor viewing:

- Two display lines
- Twenty characters per line

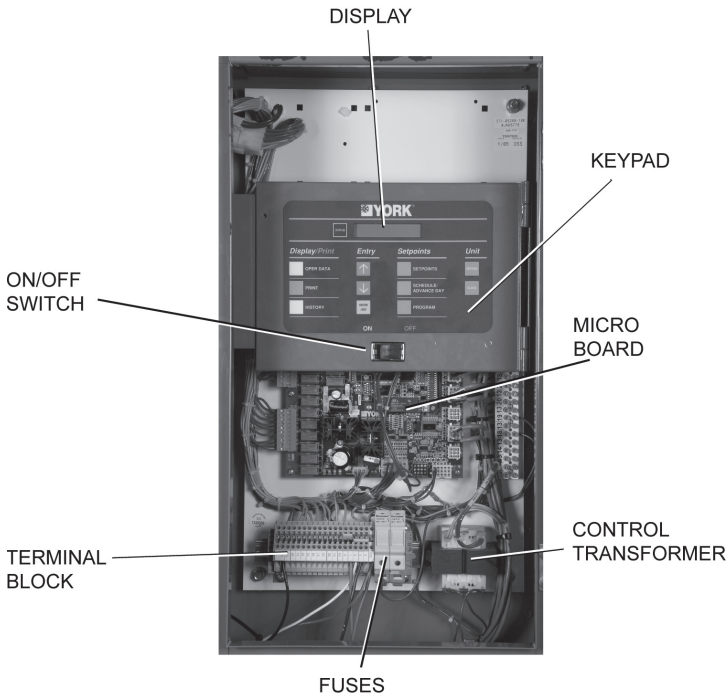

Color coded 12-button non-tactile keypad with sections for:

## **DISPLAY/PRINT** of typical information:

Chilled liquid temperatures  
Ambient temperature  
System pressures (each circuit)  
Operating hours and starts (each compressor)  
Print calls up to the liquid crystal display:  
Operating data for the systems  
History of fault shutdown data for up to the last six fault shutdown conditions  
An RS-232 port, in conjunction with this press-to-print button, is provided to permit the capability of hard copy print-outs via a separate printer (by others).

## **ENTRY** section to:

ENTER setpoints or modify system values

## **SETPPOINTS** updating can be performed to:

Chilled liquid temperature setpoint and range  
Remote reset temperature range  
Set daily schedule/holiday for start/stop  
Manual override for servicing  
Low and high ambient cutouts

Number of compressors

Low liquid temperature cutout

Low suction pressure cutout

High discharge pressure cutout

Anti-recycle timer (compressor start cycle time)

Anti-coincident timer (delay compressor starts)

## **UNIT** section to:

Set time

Set unit options

## **UNIT ON/OFF** switch

The microprocessor control center is capable of displaying the following:

- Return and leaving liquid temperature
- Low leaving liquid temperature cutout setting
- Low ambient temperature cutout setting
- Outdoor air temperature
- English or Metric data
- Suction pressure cutout setting
- Each system suction pressure
- Discharge pressure (optional)
- Liquid Temperature Reset via a Johnson Controls ISN DDC or Building Automation System (by others) via:
  - a 4-20 milliamp or 0 -10 VDC input
- Anti-recycle timer status for each system
- Anti-coincident system start timer condition
- Compressor run status
- No cooling load condition
- Day, date and time
- Daily start/stop times
- Holiday status
- Automatic or manual system lead/lag control
- Lead system definition
- Compressor starts & operating hours (each compressor)
- Status of hot gas valves, evaporator heater and fan operation
- Run permissive status
- Number of compressors running
- Liquid solenoid valve status
- Load & unload timer status
- Water pump status



Provisions are included for: pumpdown at shutdown; optional remote chilled water temperature reset and two steps of demand load limiting from an external building automation system. Unit alarm contacts are standard. The operating program is stored in non-volatile memory (EPROM) to eliminate chiller failure due to AC powered failure/battery discharge. Programmed setpoints are retained in lithium battery-backed RTC memory for 5 years minimum.

### BUILDING AUTOMATION SYSTEM INTERFACE

The factory addition of a Printed Circuit Board to accept a 4-20 milliamp or 0-10VDC to reset the leaving chiller liquid temperature from a Building Automation System. *(Only one of following options can be offered on a unit at a time: BAS, Remote Control Panel or Multi-unit Sequence Control.)* **(Factory-mounted)**

- (The standard unit capabilities include remote start-stop or up to two steps of demand (load) limiting depending on model.)
- (The standard control panel can be directly connected

to a Johnson Controls Building Automated System via the standard on-board RS485 communication port.)

### COMMUNICATIONS


- Native communication capability for BACnet (MS/TP) and Modbus
- Optional communication available for N2 and LON via eLink option

### POWER PANEL

Each panel contains:

- Compressor power terminals
- Compressor motor starting contactors per I.E.C.\*
- Control power terminals to accept incoming for 115-1-60 control power
- Fan contactors & overload current protection

The power wiring is routed through liquid-tight conduit to the compressors and fans.

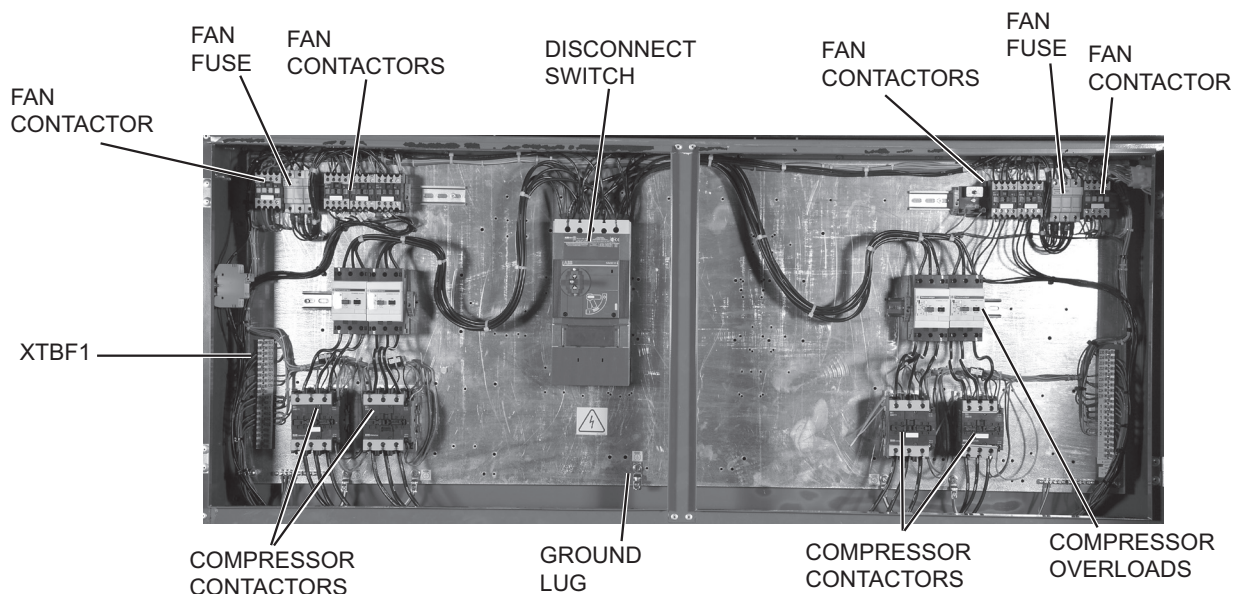

\* International Electrotechnical Commission

# Accessories and Options

## POWER OPTIONS:

**COMPRESSOR POWER CONNECTIONS** – Single-point terminal block connection(s) are provided as standard. The following power connections are available as options. (See electrical data for specific voltage and options availability.) **(Factory-mounted)**

**SINGLE-POINT SUPPLY TERMINAL BLOCK** – Includes enclosure, terminal-block and interconnecting wiring to the compressors. Separate external protection must be supplied, by others, in the incoming compressor-power wiring. *(Do not include this option if either the Single-Point Non-Fused Disconnect Switch or Single-Point Circuit Breaker options have been included.)*

**SINGLE-POINT NON-FUSED DISCONNECT SWITCH OR MULTIPLE-POINT NON-FUSED DISCONNECT SWITCHES** – Unit-mounted disconnect switch(es) with external, lockable handle (in compliance with Article 440-14 of N.E.C.), can be supplied to isolate the unit power voltage for servicing. Separate external fusing must be supplied, by others in the power wiring, which must comply with the National Electrical Code and/or local codes.

**SINGLE-POINT NON-FUSED DISCONNECT SWITCH WITH INDIVIDUAL SYSTEM BREAKERS** - Includes unit-mounted disconnect switch with external, lockable handles (in compliance with Article 440-14 of N.E.C.) to isolate unit power voltage for servicing. Factory interconnecting wiring is provided from the disconnect switch to factory supplied system circuit breakers.

**SINGLE-POINT CIRCUIT BREAKER** – A unit mounted circuit breaker with external, lockable handle (in compliance with N.E.C. Article 440-14), can be supplied to isolate the power voltage for servicing. *(This option includes the Single-Point Power connection.)*

**CONTROL TRANSFORMER** – Converts unit power voltage to 115-1-60 (0.5 or 1.0 KVA capacity). Factory mounting includes primary and secondary wiring between the transformer and the control panel. **(Factory-mounted)**

## CONTROL OPTIONS:

**AMBIENT KIT (LOW)** – Units will operate to 30°F (-1°C). This accessory includes all necessary components to permit chiller operation to 0°F (-18°C). *(This option includes the Discharge Pressure Transducer / Readout Capability option.)* For proper head pressure control in applications below 30°F (-1°C) where wind gusts may exceed 5 mph, it is recommended that Optional Condenser Louvered Enclosure Panels also be included. **(Factory-mounted)**

**AMBIENT KIT (HIGH)** – Required if units are to operate when the ambient temperature is above 115°F (46°C). Includes sun shield panels and discharge pressure transducers. *(This option includes the Discharge Pressure Transducer / Readout Capability option.)* **(Field-mounted)**

**LANGUAGE LCD AND KEYPAD DISPLAY** – Spanish, French, German, and Italian unit LCD controls and keypad display available. Standard language is English.

## COMPRESSOR, PIPING, EVAPORATOR OPTIONS:

**CHICAGO CODE RELIEF VALVES** – Unit will be provided with relief valves to meet Chicago code requirements. **(Factory-Mounted)**

**SERVICE SUCTION ISOLATION VALVE** – Service suction discharge (ball-type) isolation valves are added to unit per system (discharge service ball-type isolation valve is standard on each circuit). **(Factory-Mounted)**

**HOT GAS BY-PASS** – Permits continuous, stable operation at capacities below the minimum step of compressor unloading to as low as 5% capacity (depending on both the unit and operating conditions) by introducing an artificial load on the evaporator. Hot gas by-pass is installed on only refrigerant system #1 on two-circuited units. **(Factory-Mounted)**

**FLANGES (ANSI/AWWA C-606 COUPLINGS TYPE)** – Consists of (2) Flange adapter for grooved end pipe (standard 150 psi [10.5 bar] evaporator). *(Not available on optional DX evaporator 300 PSIG DWP waterside.)* **(Field-mounted)**

**FLOW SWITCH** – The flow switch or its equivalent must be furnished with each unit.

**150 psig (10.5 bar) DWP** – For standard units. Johnson Controls model F61MG-1C Vapor-proof SPDT, NEMA 3R switch (150 PSIG [10.5 bar] DWP), -20°F to 250°F (-29°C to 121°C), with 1" NPT connection for upright mounting in horizontal pipe. **(Field-mounted)**

**DIFFERENTIAL PRESSURE SWITCH** – Alternative to an above mentioned flow switch. Pretempco model DPS300A-P40PF-82582-5 (300 psi max. working pressure), SPDT 5 amp 125/250VAC switch, Range 3 - 40 PSID, deadband 0.5 - 0.8 psi, with 1/4" NPTE Pressure Connections.

**HYDRO-KIT** – Factory installed Hydro-Kit suitable for water glycol systems with up to 35% glycol at leaving tempera-

tures down to 20°F. The Hydro-kit option is available in a single or dual configuration (dual as standby duty only), with totally enclosed permanently lubricated pump motors.

The hydro-kit option comes standard with a balancing valve, flow switch, pressure ports, suction guide, strainer, bleed and drain valves and frost protection.

Expansion tanks are optional within the Hydro-Kit option.

## CONDENSER AND CABINET OPTIONS:

Condenser coil protection against corrosive environments is available by choosing any of the following options. For additional application recommendations, refer to FORM 150.12-ES1. **(Factory-Mounted)**

**PRE-COATED FIN CONDENSER COILS** – The unit's coils are constructed with epoxy coated aluminum fins. This can provide corrosion resistance comparable to copper-fin coils in typical seashore locations. Either these or the post-coated coils (below), are recommended for units being installed at the seashore or where salt spray may hit the unit.

**POST-COATED DIPPED CONDENSER COILS** – The unit's coils are constructed with dipped-cured condenser coils. This is another choice for seashore and other corrosive applications (with the exception of strong alkalis, oxidizers and wet bromine, chlorine and fluorine in concentrations greater than 100 ppm).

**COPPER FIN CONDENSER COILS** – The unit's coils are constructed with copper fins. (This is not recommended for units in areas where they may be exposed to acid rain.)

**ENCLOSURE PANELS (UNIT)** – Tamperproof Enclosure Panels prevent unauthorized access to units. Enclosure Panels can provide an aesthetically pleasing alternative to expensive fencing. Additionally, for proper head pressure control, Johnson Controls recommends the use of Condenser Louvered Panels for winter applications where wind gusts may exceed five miles per hour. The following types of enclosure panels are available:

**WIRE PANELS (FULL UNIT)** – Consists of welded wire-mesh guards mounted on the exterior of the unit.

Prevents unauthorized access, yet provides free air flow. **(Factory-Mounted)**

**WIRE/LOUVERED PANELS** – Consists of welded wire-mesh panels on the bottom part of unit and louvered panels on the condenser section of the unit. **(Factory-mounted)**.

**LOUVERED PANELS (CONDENSER COIL ONLY)** – Louvered panels are mounted on the sides and ends of the condenser coils for protection. **(Factory-Mounted)**

**LOUVERED PANELS (FULL UNIT)** – Louvered panels surround the front, back, and sides of the unit. They prevent unauthorized access and visually screen unit components. Unrestricted air flow is permitted through generously sized louvered openings. This option is applicable for any outdoor design ambient temperature up to 115°F (46°C). **(Factory-Mounted)**

**COIL END HAIL GUARD** – Louvered panel attached to exposed coil end. **(Factory-Mounted)**

**SOUND ATTENUATION** – One or both of the following sound attenuation options are recommended for residential or other similar sound sensitive locations:

**COMPRESSOR ACOUSTIC SOUND BLANKET** – Each compressor is individually enclosed by an acoustic sound blanket. The sound blankets are made with one layer of acoustical absorbent textile fiber of 5/8" (15mm) thickness; one layer of anti-vibrating heavy material thickness of 1/8" (3mm). Both are closed by two sheets of welded PVC, reinforced for temperature and UV resistance. **(Factory-Mounted)**




**ULTRA QUIET FANS** – Lower RPM, 8-pole fan motors are used with steeper-pitch fans. **(Factory-Mounted)**

**VIBRATION ISOLATORS** – Level adjusting, spring type 1" (25.4mm) or seismic deflection or neoprene pad isolators for mounting under unit base rails. **(Field-mounted)**

# Major Unit Components


---

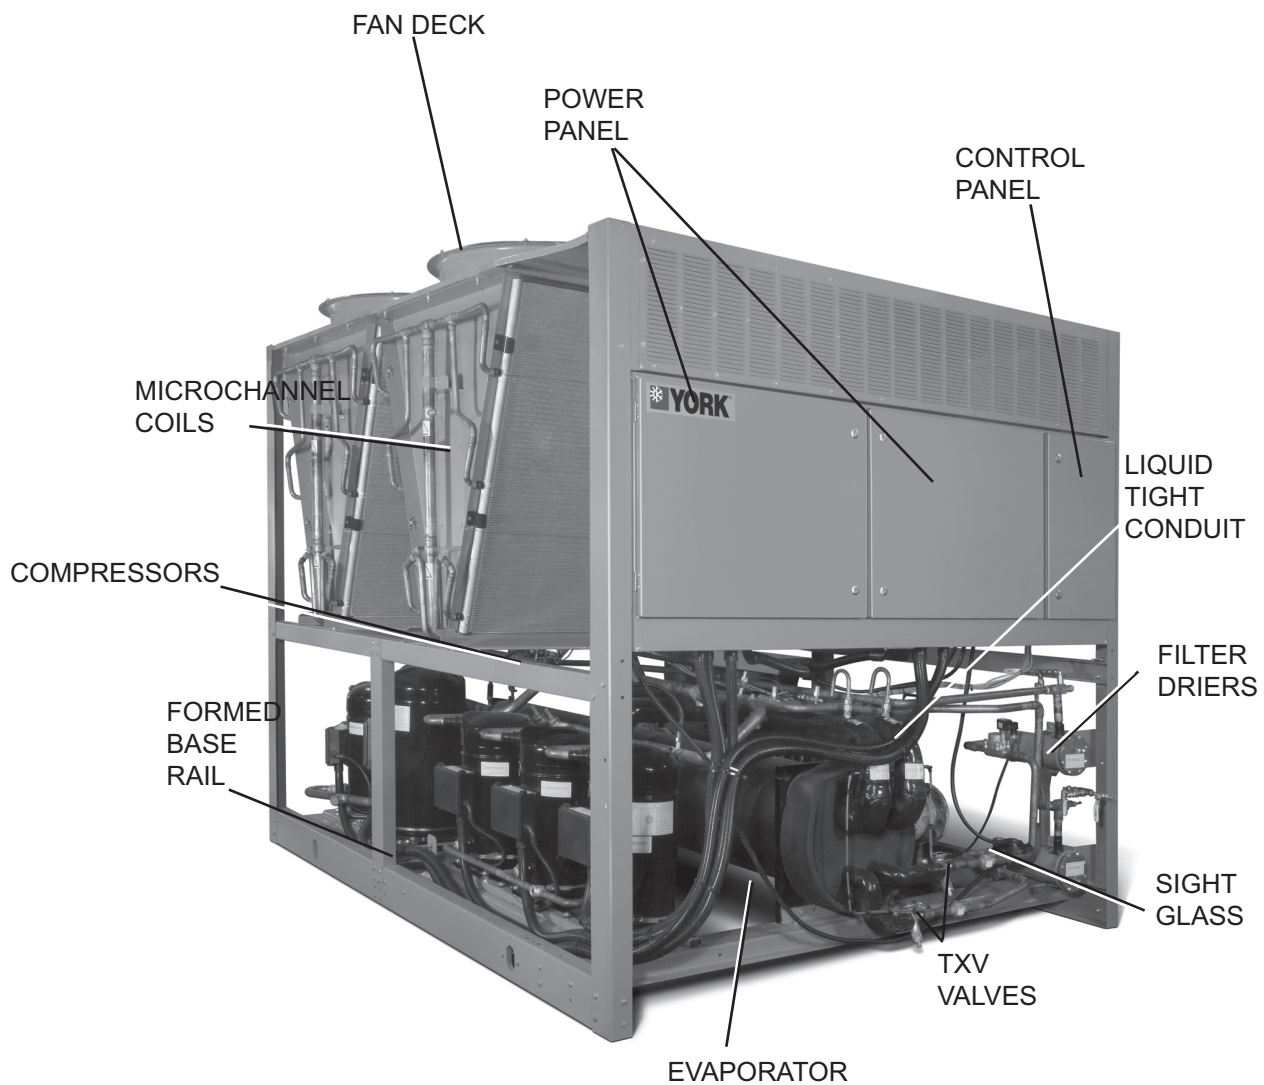



## NOMENCLATURE

The model number denotes the following characteristics of the unit:

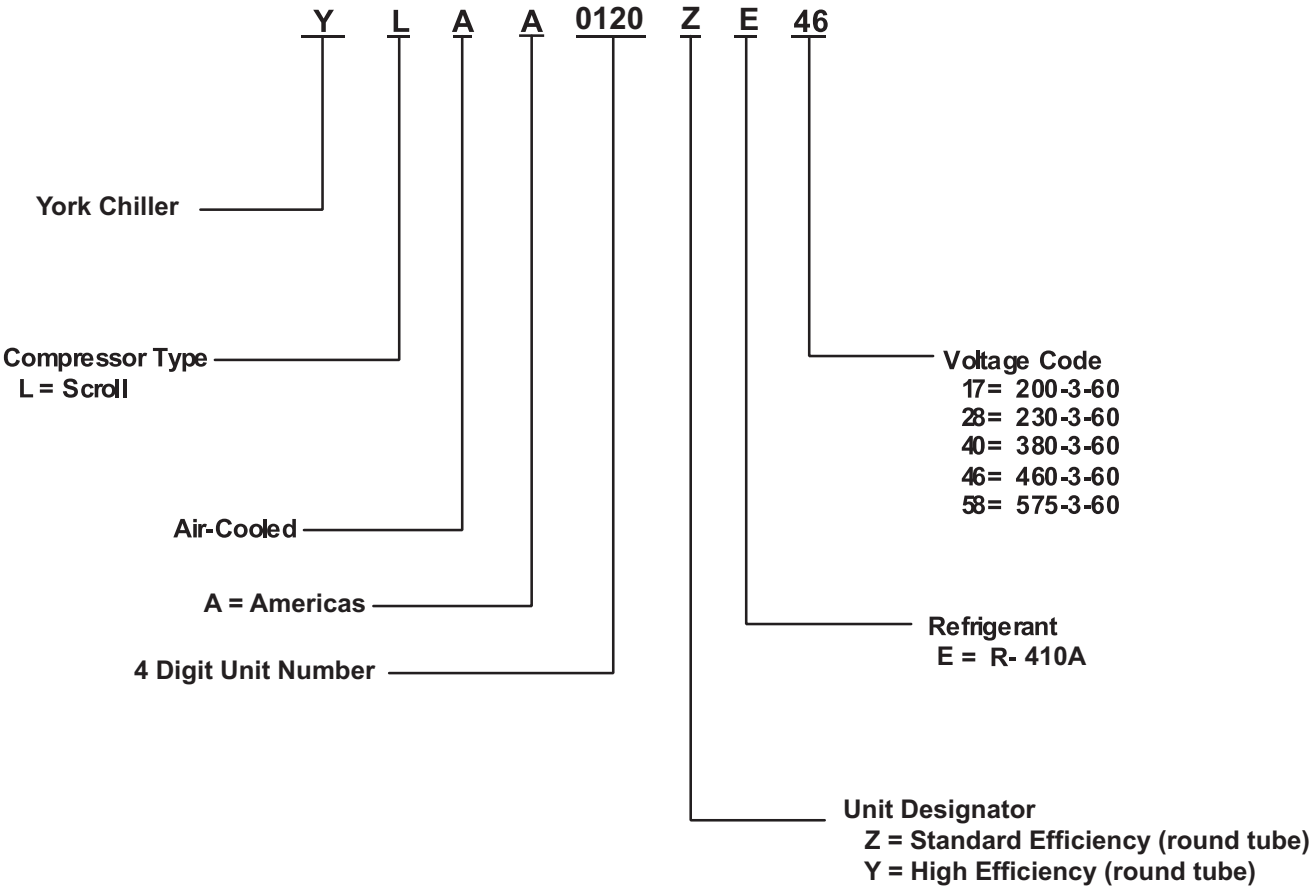

# Design Parameters

Nominal Evaporator Water Flow

| Unit Designation | Temperature |          | Water Flow (gpm) MIN | Water Flow (gpm) MAX | Air On Condenser (°F) |     |
|------------------|-------------|----------|----------------------|----------------------|-----------------------|-----|
|                  | Min (°F)    | Max (°F) |                      |                      | Min                   | Max |
| YLAA0070         | 40          | 55       | 60                   | 285                  | 0                     | 125 |
| YLAA0080         | 40          | 55       | 100                  | 355                  | 0                     | 125 |
| YLAA0090         | 40          | 55       | 140                  | 625                  | 0                     | 125 |
| YLAA0091         | 40          | 55       | 100                  | 385                  | 0                     | 125 |
| YLAA0101         | 40          | 55       | 100                  | 385                  | 0                     | 125 |
| YLAA0115         | 40          | 55       | 100                  | 385                  | 0                     | 125 |
| YLAA0120         | 40          | 55       | 150                  | 625                  | 0                     | 125 |
| YLAA0135         | 40          | 55       | 120                  | 625                  | 0                     | 125 |
| YLAA0150         | 40          | 55       | 120                  | 625                  | 0                     | 125 |
| YLAA0155         | 40          | 55       | 150                  | 625                  | 0                     | 125 |


## NOTES:

1. For leaving brine temperature below 40°F (4°C), contact your nearest Johnson Controls Office for application requirements.
2. For leaving water temperature higher than 55°F (13°C), contact the nearest Johnson Controls Office for application guidelines. 3. The evaporator is protected against freezing to -20°F (-29°C) with an electric heater as standard.
3. For operation at temperatures below 30°F (-1°C), the optional Low Ambient Kit will need to be installed on the system (for YLAA00140080 models only).
4. For operation at temperatures above 115°F (46°C), the optional High Ambient Kit will need to be installed on the system.

# Water Pressure Drop

FORM 150.62-EG5 (509)

YLAA Evaporator Pressure Drop (IP Units)

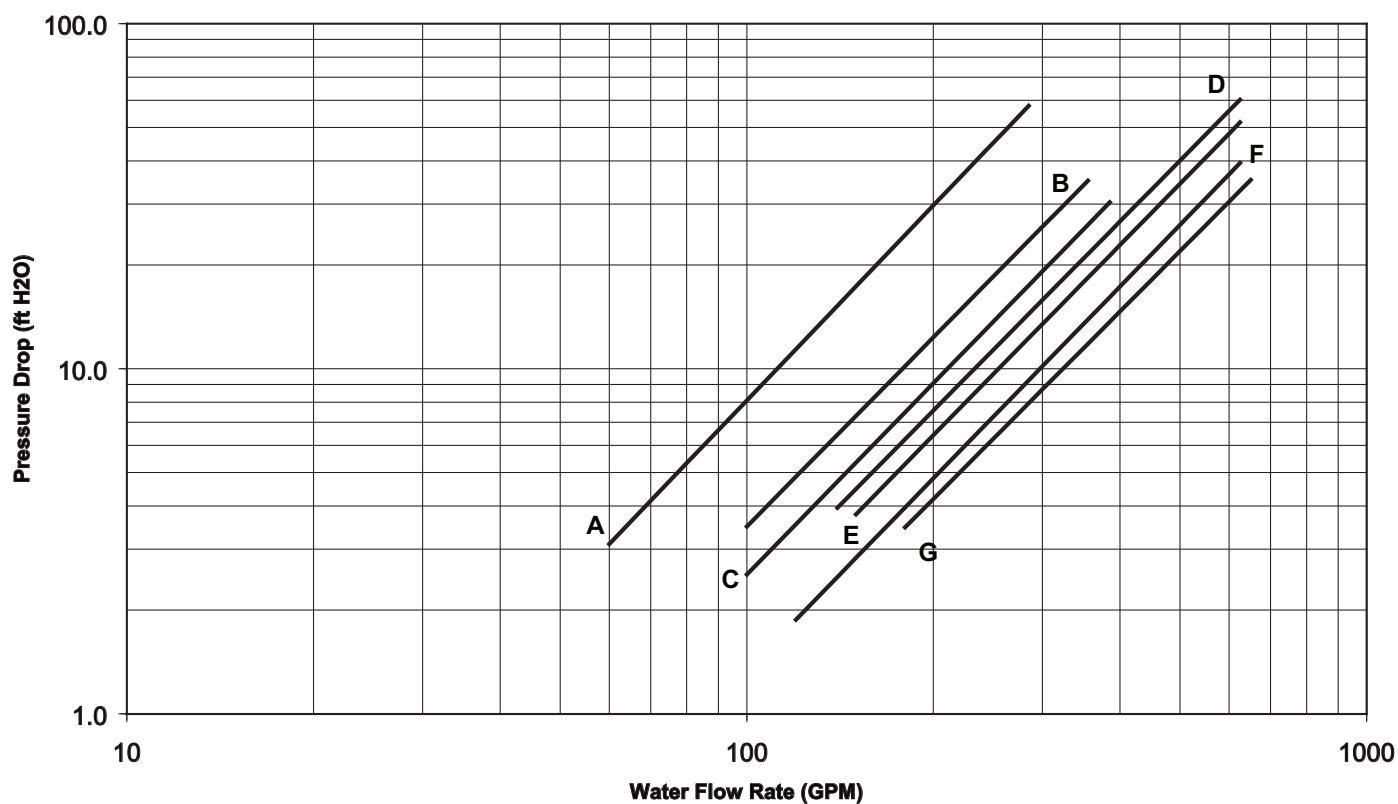

| EVAPORATOR | YLAA MODELS        |
|------------|--------------------|
| A          | 70SE               |
| B          | 80SE               |
| C          | 91HE, 101HE, 115SE |
| D          | 120SE, 155SE       |
| E          | 90SE               |
| F          | 135SE, 150SE       |

# Selection Criteria and Procedures

## GUIDE TO SELECTION

Capacity ratings for **YORK** YLAA Packaged Air-Cooled Liquid Chillers, shown on pages 18 through 23 cover the majority of design applications for these units. For unusual applications or uses beyond the scope of this catalog, please consult your nearest Johnson Controls Office or representative.

## SELECTION RULES

1. Ratings – Ratings may be interpolated, but must not be extrapolated. The Ratings given on pages 18 through 23 and the DESIGN PARAMETERS given on page 10 indicate the limits of application for these chillers.

2. Evaporator Water – Ratings are based upon 2.4 GPM per ton which is equal to a 10°F chilled water range and a 0.0001 fouling factor for the evaporator at sea level. Tables on pages 18 through 23 give capacity, compressor kW required, evaporator GPM and unit EER.

3. Condenser – Ratings are given in terms of air on condenser in degrees Fahrenheit.

4. Performance Data Correction Factors – Ratings are based on 0.0001 evaporator fouling factor, 10°F chilled water range and at sea level. For operation at different conditions, apply the appropriate correction factor from the following table.

### FOULING FACTOR

| ALTITUDE  | TEMP SPLIT | TONS  | COMPR kW | TONS  | COMPR kW |
|-----------|------------|-------|----------|-------|----------|
| SEA LEVEL | 8          | 0.994 | 0.999    | 0.991 | 0.998    |
|           | 10         | 1.000 | 1.000    | 0.993 | 0.999    |
|           | 12         | 1.005 | 1.001    | 0.999 | 0.999    |
|           | 14         | 1.008 | 1.002    | 1.005 | 1.000    |
| 2000 FT.  | 8          | 0.990 | 1.010    | 0.984 | 1.009    |
|           | 10         | 0.995 | 1.010    | 0.990 | 1.009    |
|           | 12         | 0.999 | 1.011    | 0.995 | 1.010    |
|           | 14         | 1.004 | 1.015    | 0.998 | 1.011    |
| 4000 FT.  | 8          | 0.983 | 1.021    | 0.977 | 1.020    |
|           | 10         | 0.989 | 1.024    | 0.983 | 1.021    |
|           | 12         | 0.994 | 1.025    | 0.988 | 1.024    |
|           | 14         | 0.997 | 1.026    | 0.993 | 1.025    |
| 6000 FT.  | 8          | 0.978 | 1.035    | 0.973 | 1.034    |
|           | 10         | 0.982 | 1.037    | 0.978 | 1.035    |
|           | 12         | 0.987 | 1.037    | 0.980 | 1.036    |
|           | 14         | 0.992 | 1.038    | 0.986 | 1.037    |

6. Ethylene Glycol Correction Factors – The following factors are to be applied to the standard ratings for units cooling ethylene glycol.

## ETHYLENE GLYCOL

| % WEIGHT | TONS kW | COMPR | GPM°F/TON | PRESS DROP | FREEZE PT |
|----------|---------|-------|-----------|------------|-----------|
| 10       | 0.985   | 0.997 | 24.1      | 1.034      | 26        |
| 20       | 0.981   | 0.996 | 24.9      | 1.062      | 16        |
| 30       | 0.974   | 0.995 | 26.1      | 1.096      | 5         |
| 40       | 0.966   | 0.991 | 27.5      | 1.134      | -10       |
| 50       | 0.957   | 0.989 | 29.1      | 1.172      | -32       |

7. Propylene Glycol Correction Factors – The following factors are to be applied to the standard ratings for units cooling propylene glycol.

## PROPYLENE GLYCOL

| % WEIGHT | TONS kW | COMPR | GPM°F/TON | PRESS DROP | FREEZE PT |
|----------|---------|-------|-----------|------------|-----------|
| 10       | 0.983   | 0.996 | 24.2      | 1.048      | 27        |
| 20       | 0.974   | 0.995 | 24.4      | 1.086      | 19        |
| 30       | 0.961   | 0.990 | 25.1      | 1.134      | 8         |
| 40       | 0.946   | 0.980 | 26.0      | 1.186      | -5        |
| 50       | 0.928   | 0.984 | 27.2      | 1.247      | -25       |

## METHOD OF SELECTION

To select a Johnson Controls - YLAA Packaged Air-Cooled Liquid Chiller, the following data must be known:

1. Design Capacity in tons refrigeration (TR).
2. Entering and Leaving Liquid Temperatures.
3. Outside ambient air temperature in degrees F.
4. GPM of chilled liquid.

Determine capacity requirements from the following formula:

### EXAMPLE – WATER CHILLING

1. GIVEN: Provide a capacity of 90 Tons at 42°F leaving water 10°F range, 0.0001FF, 80°F air on the condenser, at sea level and 60 Hz.
2. FIND: Unit Size Compressor kW Input
3. From the Ratings on pages 18 - 23:  
**SELECT:** YLAA0090SE (English Units)  
91.4 Tons  
82 Compressor KW  
12.4 Unit EER
4. Calculate Compressor kW at 50 Tons:  
 $kW = (90 - 91.4) \times 80.7 = 80.7 \text{ kW}$
5. Calculate GPM:



$$\text{GPM} = \frac{90 \text{ Tons} \times 24}{216 \text{ GPM}}$$

10°F Range

6. From Page 10, read 10 ft of water evaporator pressure drop for GPM:
7. A YLAA0090 is suitable.

#### EXAMPLE – BRINE CHILLING

1. **GIVEN:** Provide a capacity of 80 tons cooling 30% by weight Ethylene Glycol from 50°F to 40°F, 0.00025FF, 95°F air on the condenser, 60 Hz and 4000 altitude.
2. **DETERMINE:**  
Unit Size kW Input  
Ethylene Glycol GPM Evaporator Pressure Drop
3. See Ethylene Glycol correction factors, for 30% by weight Ethylene Glycol.  
**READ:** .974 Tons factor  
.995 Compr. kW factor 26.1 Gal./°F/Tons factor
4. See Performance Data Correction Factors for 0.00025 fouling factor and 4000 ft. altitude.  
**READ:** .983 Tons factor 1.021 kW factor

5. From RATINGS on pages 18 - 23:  
**SELECT:** YLAA0090 (English Units)  
91.4 Tons 82.0 Compressor kW
6. Determine YLAA0090 brine cooling capacity and Compressor kW requirement:  
A. Tons = 91.4 x .974 x .983 = 87.51  
B. Compr. kW = 82.0 x .995 x 1.021 = 83.3  
Determine average full load Compressor kW at 80 tons: (80/87.51) x 83.3 = 76.15kW
8. Determine Ethylene Glycol GPM:  
Tons x Gal. °F/min/Ton factor  
GPM = Range 80.0 x 26.1  
  
GPM = 10 GPM = 208.8
9. Determine Evaporator Pressure Drop:  
A. See Ethylene Glycol correction factors for 30% by weight Ethylene Glycol.  
**READ:** 1.096 Pressure Drop Factor  
B. See pages 18-19 at 88.7 GPM for the YLAA0090.  
**READ:** 6.8 Ft. H<sub>2</sub>O Pressure Drop  
C. Evaporator Pressure Drop = 6.8 x 1.096 or 7.5 Ft.H<sub>2</sub>O
10. YLAA0090 is suitable.

# Pump Selection Criteria

## PUMP SELECTION

Multiple pump sizes are available for each YLAA model providing the ability to closely match the system requirements. Within the YORKworks CE chiller selection program is an integral pump selection program that can be used for a quick and easy pump selection. Please contact your local Johnson Controls sales rep for assistance with this selection program. If this program is not available or if a manual selection is desired, the following steps can be followed to make a pump selection for the hydro kit option.

1. Determine whether a single pump or dual pump (standby) option is required. For this example, single pump hydro kits will be used.
2. Determine the required flow (GPM). This value will be calculated with the chiller selection. Pump design flow must be within the limits of the chiller.  
ex. 100 Ton Chiller: 235 gpm (YLAA 0101HE) single pump option
3. Calculate the external system pressure loss (ft) for all piping and components external to the chiller.  
ex. 45 ft
4. Determine the internal pressure loss to the chiller (ft) due to the evaporator from the Water Pressure Drop charts. Combine this with the external system pressure loss (ft) to determine the preliminary pressure loss.  
ex. Internal Pressure Loss due to evaporator: 12 ft (from chart on page 11)  
Preliminary pressure loss: 45 ft (external) + 12 ft (evaporator) = 57 ft
5. Review the available hydro kit options for the YLAA model (See Table 1) selected using the Hydro Kit by Models Chart. Use the flow and head calculated in steps 2 and 4 to select a preliminary design point. If the preliminary design point does not fall directly on the curve, select the next step larger size of impeller.  
ex. Preliminary design point: 235 gpm/57 ft  
Preliminary selection: Hydro Kit B/3x3x10@ 1740 rpm; 9.00 in impeller diameter with 7.5Hp motor.
6. Using the Hydro Kit pressure loss charts found on page 16-17, determine the internal pressure loss to the chiller due to the hydro kit piping for the selected Hydro Kit. Add this to the preliminary pressure loss (from step 4) to determine the total pressure loss:  
ex. For Hydro Kit B on YLAA0101 unit, the hydro kit pressure loss is 15 ft.  
Total pressure loss = 57 ft + 15 ft = 72 ft
7. Check to see if the Hydro-Kit selection is valid. Using the total pressure loss (from step 6), plot the flow (GPM) and the total pressure loss on the hydro kit selected in step 5. If the pump selection is no longer adequate, re-select a hydro kit and go back to step 6. (Note: if a design point does not fall directly on the curve, one can select the next step larger size of impeller and use the circuit balancing valve to adjust the system head requirements and correct for small variations from the selected pump curve.) If the pump selection is satisfactory, proceed to step 8.  
ex. Total Pressure Loss = 72ft. with GPM = 235  
Selection is still valid for a Hydro-Kit B (3x3x10, 1800rpm, 9" impeller @ 7.5Hp)
8. The pump efficiency can be read from the pump curve using the dashed efficiency lines labeled as a percentage.  
ex. Efficiency: 68 % (from pump curve)
9. The pump is selected  
ex. Hydro Kit B at 68%
10. The pump NPSHr required can also be read from the pump curves. When selecting a pump one must make sure that the system designed NPSHa available is greater than the NPSHr required by the pump plus the fluid vapor pressure.  
ex. NPSHr = 6 ft (From Pump Curve for Hydro Kit B)  
NPSHa = 30 ft (From System Design - Figure 3)  
VP = 0.4 ft (Water at 50°F)  
NPSHr + VP < NPSHa  
6 ft + 0.4 ft < 30 ft


If the system flow or pressure exceeds that of the hydro kit pump curves provided, an integral hydro kit is not available for your application and a separate pump must be provided.

**TABLE1 – PUMP SELECTION INFORMATION**


| KIT | SERIES | KIT TYPE | PUMP SIZE | PUMP HP | MOTOR RPM | IMPELLER DIA (IN) | MODELS WHERE USED           |
|-----|--------|----------|-----------|---------|-----------|-------------------|-----------------------------|
| A   | 4380   | Single   | 3X3X8     | 5       | 1800      | 7.5               | 70,80,90,91                 |
| B   | 4380   | Single   | 3X3X10    | 7.5     | 1800      | 9                 | 70,80,90,91,101             |
| C   | 4380   | Single   | 3X3X10    | 10      | 1800      | 10                | 70,80,115,120,135           |
| D   | 4380   | Single   | 3X3X6     | 15      | 3600      | 5.9               | 70,80,90,91,101,115,120,135 |
| E   | 4380   | Single   | 3X3X8     | 20      | 3600      | 6.3               | 90,91,101,115,120,135       |
| F   | 4380   | Single   | 3X3X8     | 7.5     | 1800      | 8                 | 101,115,120,135             |
| G   | 4380   | Single   | 4X4X8     | 10      | 1800      | 7.6               | 150,155                     |
| H   | 4380   | Single   | 4X4X6     | 10      | 3600      | 4.9               | 150,155                     |
| I   | 4380   | Single   | 4X4X6     | 15      | 3600      | 5.5               | 150,155                     |
| J   | 4380   | Single   | 4X4X6     | 20      | 3600      | 6                 | 150,155                     |
| K   | 4382   | Dual     | 4X4X8     | 7.5     | 1800      | 7.9               | 70,80,90,91,101,115,120,135 |
| L   | 4382   | Dual     | 4X4X6     | 10      | 3600      | 5.3               | 70,80,90,91,101,115,150,155 |
| M   | 4382   | Dual     | 4X4X6     | 15      | 3600      | 5.6               | 70,80,90,91,120,135,150,155 |
| N   | 4382   | Dual     | 3X3X8     | 15      | 3600      | 6.6               | 70,80,90,91,                |
| O   | 4382   | Dual     | 4X4X6     | 15      | 3600      | 5.9               | 101,115,120,165             |
| P   | 4382   | Dual     | 3X3X8     | 20      | 3600      | 7.2               | 101,115,120                 |
| R   | 4382   | Dual     | 4X4X8     | 20      | 3600      | 6.3               | 135,150,155                 |

# Pump Pressure Drop Curves


YLAA0070

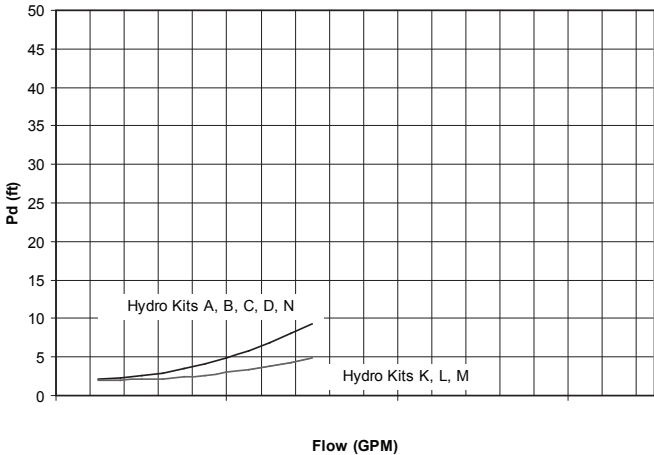


YLAA0080

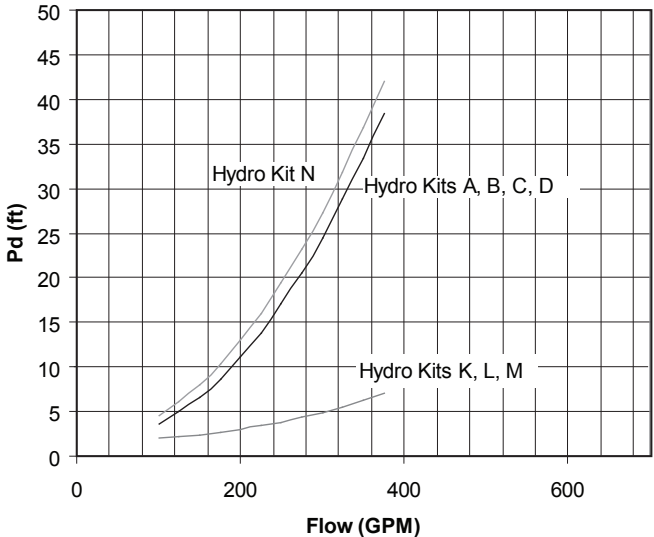


YLAA0090

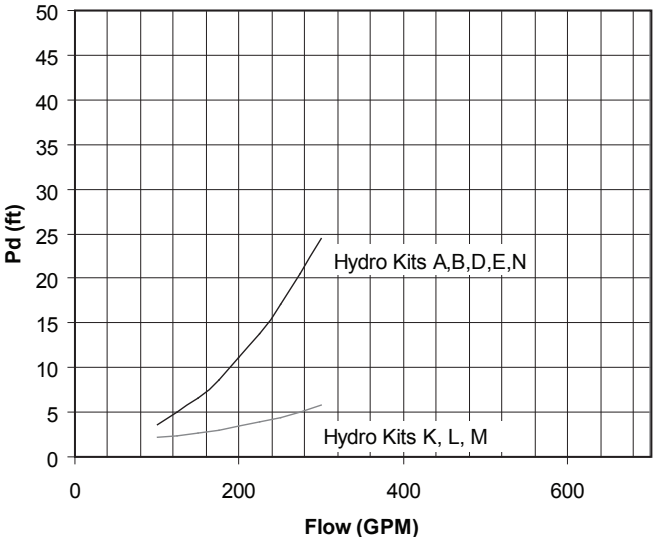


YLAA0091

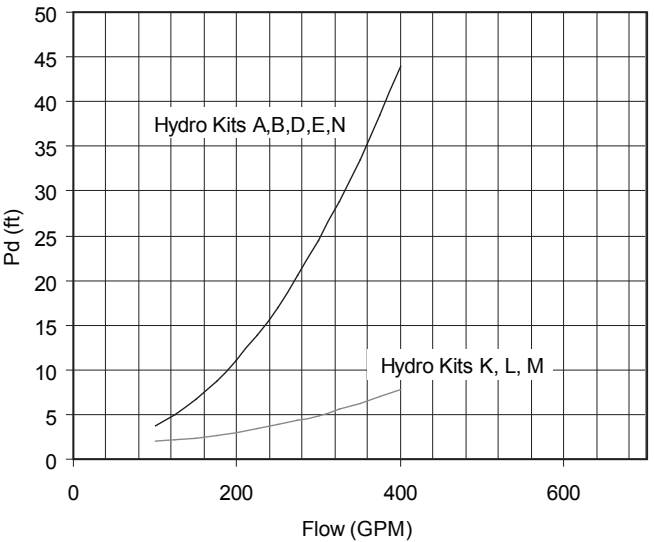


YLAA0101

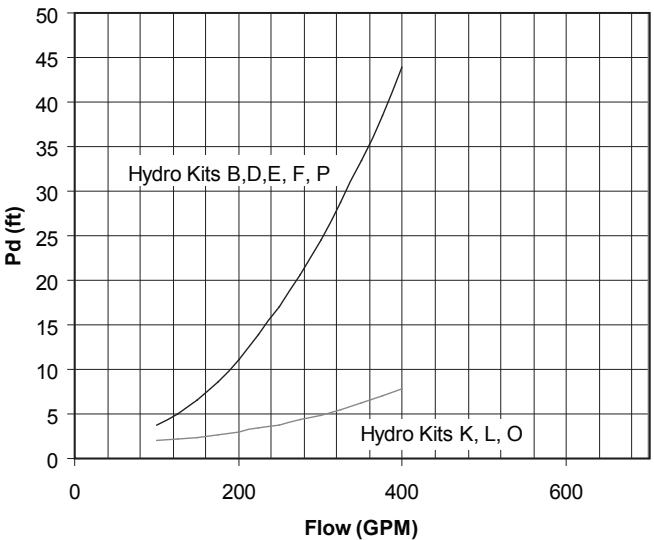


YLAA0115

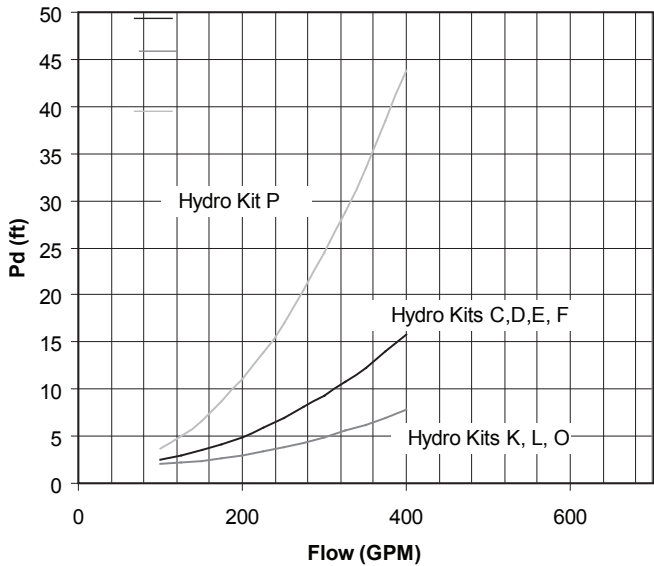


YLAA0150

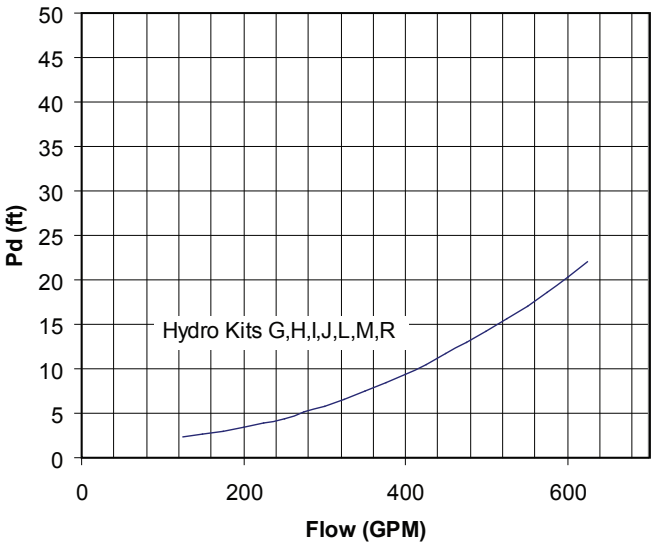


YLAA0120

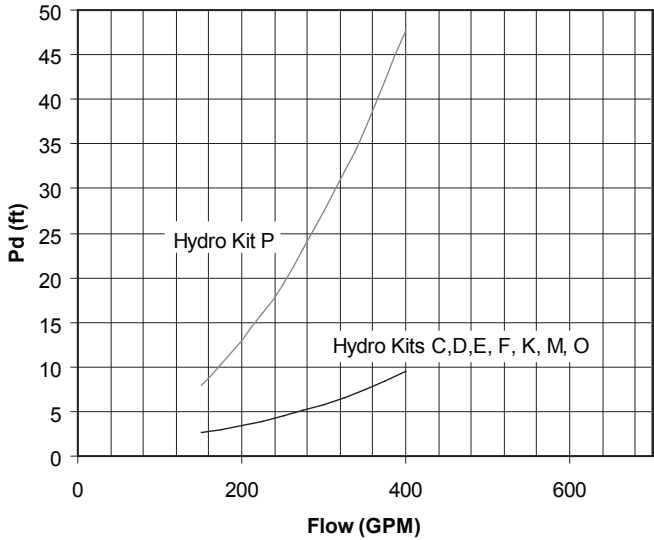

YLAA0155






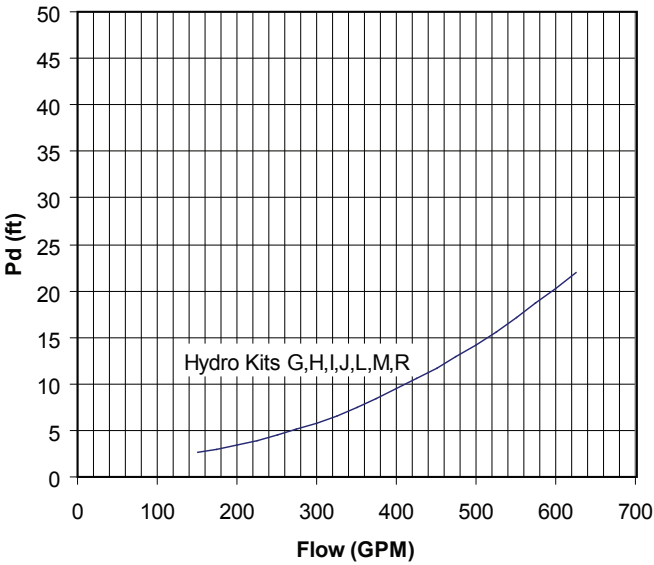


YLAA0135

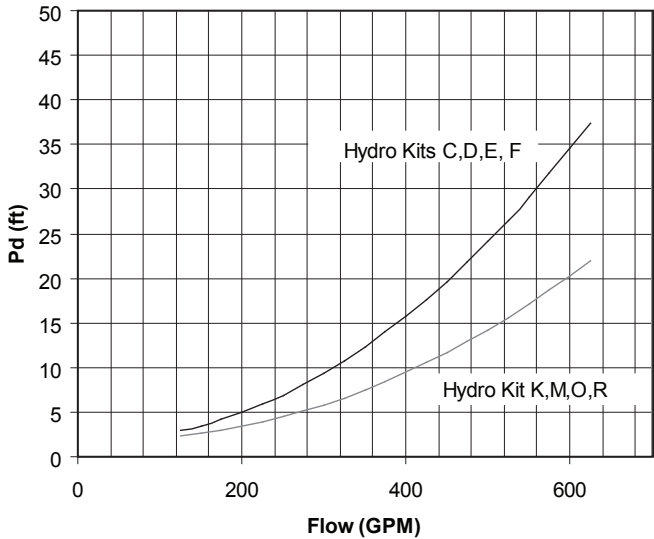




# Single Pump Curves

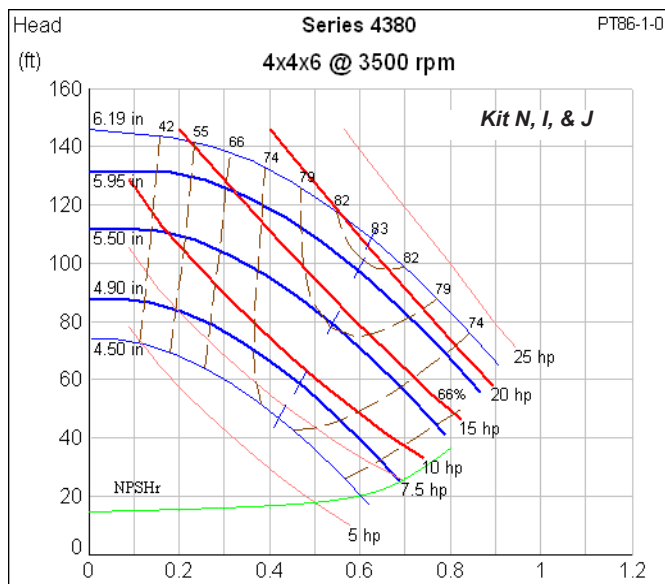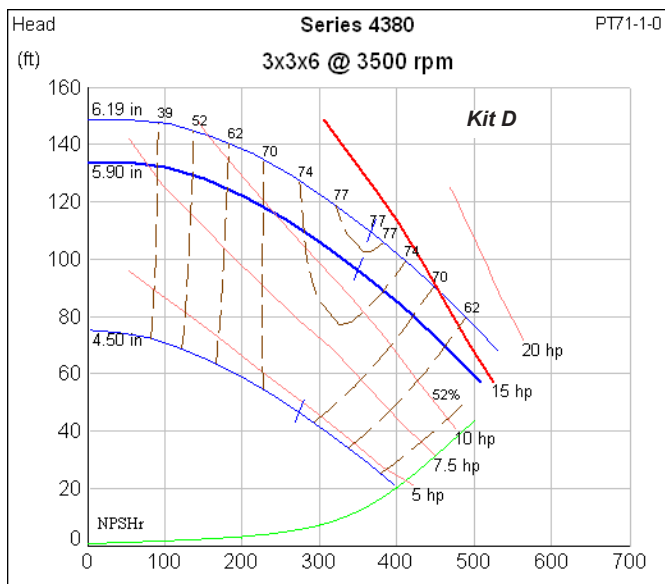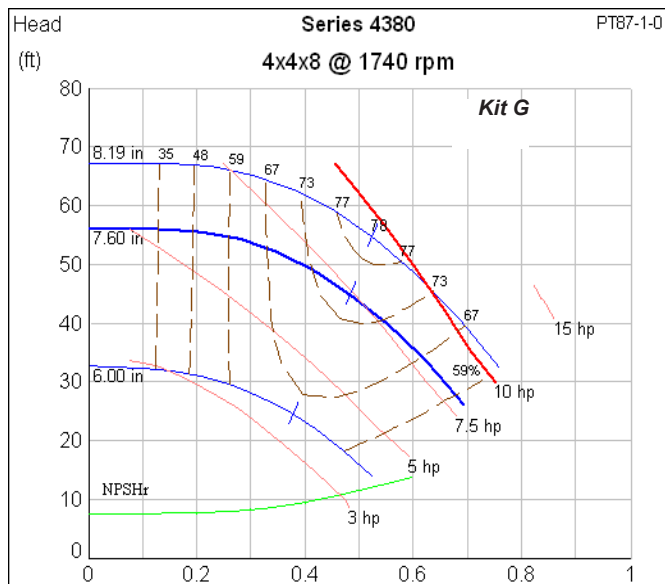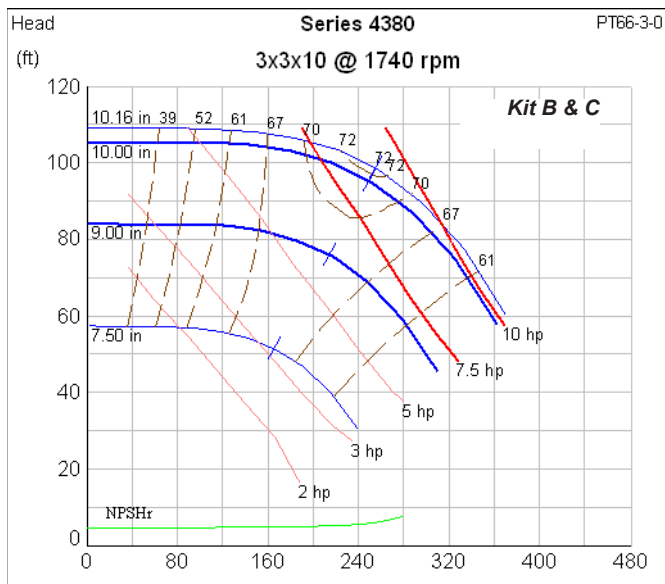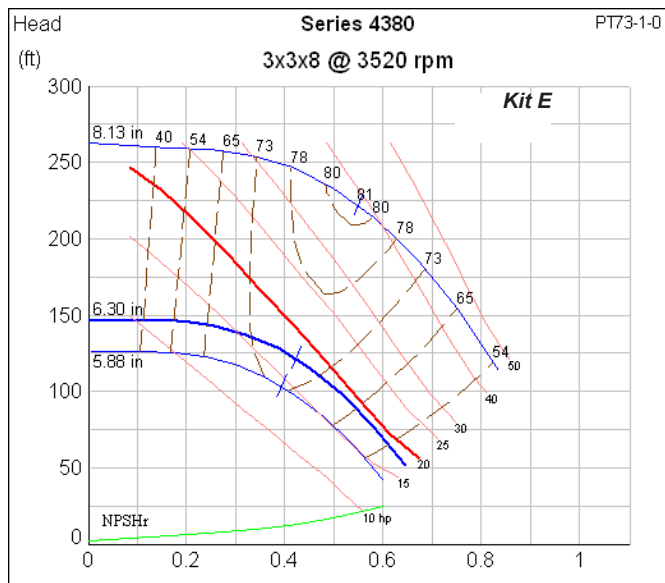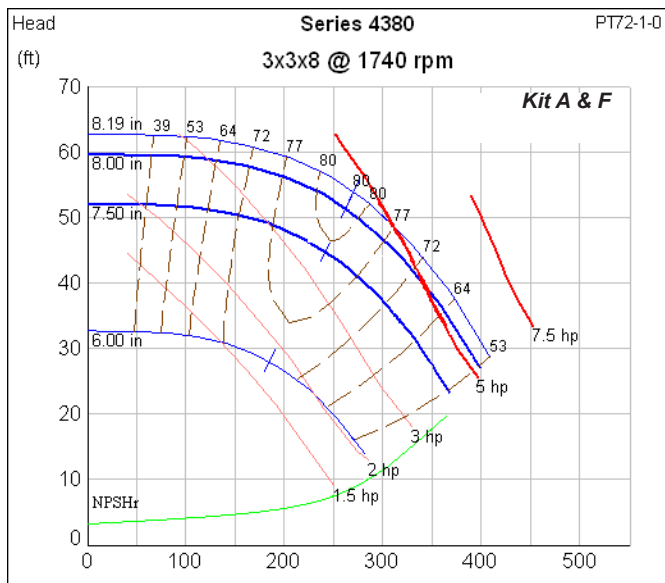

# Dual Pump Curves

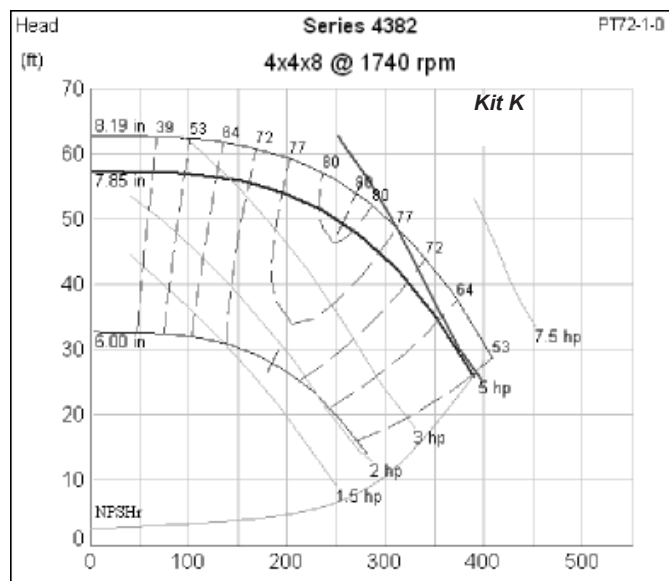

# Ratings - 60 Hz

## MODEL: YLAA0070ZE

IPLV: 15.7

### AIR TEMPERATURE ON - CONDENSER (°F)

| LCHWT<br>(°F) | 75.0 |      |      | 80.0 |      |      | 85.0 |      |      | 90.0 |      |      | 95.0 |      |      | 100.0 |      |     |
|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|-----|
|               | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS  | KW   | EER |
| 40.0          | 74.7 | 61.9 | 13.1 | 72.8 | 65.2 | 12.1 | 70.9 | 68.8 | 11.3 | 68.8 | 72.7 | 10.4 | 66.8 | 76.8 | 9.6  | 64.3  | 80.8 | 8.8 |
| 42.0          | 77.1 | 62.5 | 13.4 | 75.1 | 65.9 | 12.4 | 73.1 | 69.5 | 11.5 | 71.0 | 73.3 | 10.6 | 68.9 | 77.4 | 9.8  | 66.3  | 81.5 | 9.0 |
| 44.0          | 79.5 | 63.2 | 13.6 | 77.5 | 66.5 | 12.7 | 75.4 | 70.1 | 11.8 | 73.3 | 74.0 | 10.9 | 71.1 | 78.1 | 10.1 | 68.4  | 82.1 | 9.2 |
| 45.0          | 80.7 | 63.5 | 13.8 | 78.7 | 66.8 | 12.8 | 76.6 | 70.5 | 11.9 | 74.4 | 74.4 | 11.0 | 72.2 | 78.5 | 10.2 | 69.5  | 82.5 | 9.3 |
| 46.0          | 82.0 | 63.8 | 13.9 | 79.9 | 67.2 | 13.0 | 77.8 | 70.8 | 12.0 | 75.6 | 74.7 | 11.1 | 73.3 | 78.8 | 10.3 | 70.6  | 82.8 | 9.5 |
| 48.0          | 84.5 | 64.5 | 14.2 | 82.3 | 67.9 | 13.2 | 80.2 | 71.5 | 12.3 | 77.9 | 75.4 | 11.4 | 75.5 | 79.5 | 10.5 | 72.7  | 83.5 | 9.7 |
| 50.0          | 87.1 | 65.2 | 14.5 | 84.9 | 68.6 | 13.5 | 82.6 | 72.2 | 12.5 | 80.2 | 76.1 | 11.6 | 77.8 | 80.2 | 10.7 | 74.9  | 84.3 | 9.9 |

## MODEL: YLAA0080ZE

IPLV: 15.0

### AIR TEMPERATURE ON - CONDENSER (°F)

| LCHWT<br>(°F) | 75.0 |      |      | 80.0 |      |      | 85.0 |      |      | 90.0 |      |      | 95.0 |      |      | 100.0 |      |     |
|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|-----|
|               | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS  | KW   | EER |
| 40.0          | 80.3 | 69.1 | 12.7 | 78.2 | 72.9 | 11.8 | 76.0 | 77.0 | 10.9 | 73.8 | 81.4 | 10.0 | 71.5 | 86.1 | 9.2  | 68.7  | 90.8 | 8.5 |
| 42.0          | 82.9 | 69.8 | 13.0 | 80.7 | 73.6 | 12.1 | 78.5 | 77.7 | 11.1 | 76.1 | 82.2 | 10.3 | 73.8 | 86.9 | 9.5  | 70.9  | 91.5 | 8.7 |
| 44.0          | 85.5 | 70.6 | 13.3 | 83.3 | 74.4 | 12.3 | 81.0 | 78.5 | 11.4 | 78.6 | 83.0 | 10.5 | 76.1 | 87.7 | 9.7  | 73.2  | 92.3 | 8.9 |
| 45.0          | 86.8 | 71.0 | 13.4 | 84.5 | 74.8 | 12.4 | 82.2 | 78.9 | 11.5 | 79.8 | 83.4 | 10.6 | 77.3 | 88.1 | 9.8  | 74.4  | 92.7 | 9.0 |
| 46.0          | 88.2 | 71.4 | 13.6 | 85.9 | 75.2 | 12.6 | 83.5 | 79.3 | 11.6 | 81.0 | 83.8 | 10.7 | 78.5 | 88.5 | 9.9  | 75.5  | 93.1 | 9.1 |
| 48.0          | 90.9 | 72.2 | 13.8 | 88.5 | 76.0 | 12.8 | 86.0 | 80.2 | 11.9 | 83.5 | 84.6 | 11.0 | 81.0 | 89.3 | 10.1 | 77.9  | 93.9 | 9.3 |
| 50.0          | 93.7 | 73.0 | 14.1 | 91.2 | 76.9 | 13.1 | 88.7 | 81.0 | 12.1 | 86.1 | 85.4 | 11.2 | 83.5 | 90.1 | 10.3 | 80.3  | 94.8 | 9.5 |

## MODEL: YLAA0090ZE

IPLV: 14.9

### AIR TEMPERATURE ON - CONDENSER (°F)

| LCHWT<br>(°F) | 75.0  |      |      | 80.0  |      |      | 85.0 |      |      | 90.0 |      |      | 95.0 |       |      | 100.0 |       |     |
|---------------|-------|------|------|-------|------|------|------|------|------|------|------|------|------|-------|------|-------|-------|-----|
|               | TONS  | KW   | EER  | TONS  | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS | KW    | EER  | TONS  | KW    | EER |
| 40.0          | 89.8  | 77.6 | 12.8 | 87.3  | 81.8 | 11.8 | 84.7 | 86.3 | 10.9 | 82.0 | 91.2 | 10.0 | 79.2 | 96.3  | 9.2  | 76.0  | 101.4 | 8.4 |
| 42.0          | 92.7  | 78.5 | 13.1 | 90.1  | 82.7 | 12.1 | 87.5 | 87.2 | 11.2 | 84.7 | 92.1 | 10.3 | 81.9 | 97.3  | 9.5  | 78.6  | 102.4 | 8.6 |
| 44.0          | 95.6  | 79.4 | 13.3 | 93.0  | 83.7 | 12.3 | 90.3 | 88.2 | 11.4 | 87.5 | 93.1 | 10.5 | 84.6 | 98.2  | 9.7  | 81.2  | 103.3 | 8.9 |
| 45.0          | 97.1  | 79.9 | 13.4 | 94.4  | 84.2 | 12.5 | 91.7 | 88.7 | 11.5 | 88.9 | 93.6 | 10.6 | 86.0 | 98.7  | 9.8  | 82.5  | 103.9 | 9.0 |
| 46.0          | 98.6  | 80.4 | 13.6 | 95.9  | 84.7 | 12.6 | 93.1 | 89.3 | 11.6 | 90.3 | 94.1 | 10.7 | 87.4 | 99.3  | 9.9  | 83.9  | 104.4 | 9.1 |
| 48.0          | 101.6 | 81.5 | 13.8 | 98.8  | 85.7 | 12.8 | 95.9 | 90.3 | 11.9 | 93.1 | 95.2 | 11.0 | 90.1 | 100.3 | 10.1 | 86.5  | 105.4 | 9.3 |
| 50.0          | 104.7 | 82.5 | 14.1 | 101.8 | 86.8 | 13.1 | 98.9 | 91.4 | 12.1 | 95.9 | 96.2 | 11.2 | 92.9 | 101.4 | 10.3 | 89.2  | 106.5 | 9.5 |

#### NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0070ZE</b> | <b>IPLV: 15.7</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |      |     | 110.0 |      |     | 115.0 |      |     |
|---------------|-------|------|-----|-------|------|-----|-------|------|-----|
|               | TONS  | KW   | EER | TONS  | KW   | EER | TONS  | KW   | EER |
| 40.0          | 61.7  | 85.0 | 8.1 | 59.0  | 89.5 | 7.4 | 56.3  | 94.1 | 6.7 |
| 42.0          | 63.7  | 85.7 | 8.3 | 60.9  | 90.1 | 7.5 | 58.1  | 94.8 | 6.9 |
| 44.0          | 65.7  | 86.4 | 8.5 | 62.9  | 90.8 | 7.7 | 60.0  | 95.5 | 7.0 |
| 45.0          | 66.7  | 86.7 | 8.6 | 63.9  | 91.2 | 7.8 | 60.9  | 95.9 | 7.1 |
| 46.0          | 67.7  | 87.1 | 8.7 | 64.9  | 91.6 | 7.9 | 61.9  | 96.2 | 7.2 |
| 48.0          | 69.8  | 87.8 | 8.9 | 66.9  | 92.3 | 8.1 | 63.8  | 97.0 | 7.4 |
| 50.0          | 72.0  | 88.5 | 9.1 | 68.9  | 93.0 | 8.3 | 65.8  | 97.7 | 7.6 |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0080ZE</b> | <b>IPLV: 15.0</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |      |     | 110.0 |       |     | 115.0 |      |     |
|---------------|-------|------|-----|-------|-------|-----|-------|------|-----|
|               | TONS  | KW   | EER | TONS  | KW    | EER | TONS  | KW   | EER |
| 40.0          | 65.9  | 95.6 | 7.7 | 63.0  | 100.8 | 7.0 | 51.4  | 83.4 | 6.8 |
| 42.0          | 68.0  | 96.4 | 7.9 | 65.1  | 101.6 | 7.2 | 53.2  | 84.0 | 7.0 |
| 44.0          | 70.2  | 97.2 | 8.1 | 67.2  | 102.4 | 7.4 | 55.0  | 84.6 | 7.2 |
| 45.0          | 71.4  | 97.6 | 8.2 | 68.3  | 102.8 | 7.5 | 55.9  | 84.9 | 7.3 |
| 46.0          | 72.5  | 98.0 | 8.3 | 69.3  | 103.2 | 7.6 | 56.8  | 85.2 | 7.4 |
| 48.0          | 74.7  | 98.9 | 8.5 | 71.5  | 104.0 | 7.7 | 58.7  | 85.8 | 7.6 |
| 50.0          | 77.1  | 99.7 | 8.7 | 73.7  | 104.9 | 7.9 | 60.6  | 86.4 | 7.8 |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0090ZE</b> | <b>IPLV: 14.9</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |      |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW   | EER |
| 40.0          | 72.7  | 106.7 | 7.7 | 69.4  | 112.4 | 7   | 48.1  | 72.8 | 7.3 |
| 42.0          | 75.2  | 107.7 | 7.9 | 71.8  | 113.3 | 7.2 | 49.8  | 73.3 | 7.5 |
| 44.0          | 77.7  | 108.7 | 8.1 | 74.2  | 114.4 | 7.4 | 51.6  | 73.8 | 7.7 |
| 45.0          | 79    | 109.2 | 8.2 | 75.4  | 114.9 | 7.4 | 52.5  | 74   | 7.8 |
| 46.0          | 80.3  | 109.8 | 8.3 | 76.6  | 115.4 | 7.5 | 53.4  | 74.3 | 7.9 |
| 48.0          | 82.9  | 110.8 | 8.5 | 79.1  | 116.5 | 7.7 | 55.2  | 74.9 | 8.1 |
| 50.0          | 85.5  | 111.9 | 8.6 | 70.9  | 94.6  | 8.4 | 57.1  | 75.4 | 8.3 |

**NOTES:**

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

# Ratings - 60 Hz – continued

| MODEL: YLAA0091YE                   |       |      |      |       |      |      |       |      |      |      |      |      |      |      |      |       | IPLV: 14.6 |      |  |
|-------------------------------------|-------|------|------|-------|------|------|-------|------|------|------|------|------|------|------|------|-------|------------|------|--|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |      |      |       |      |      |       |      |      |      |      |      |      |      |      |       |            |      |  |
| LCHWT<br>(°F)                       | 75.0  |      |      | 80.0  |      |      | 85.0  |      |      | 90.0 |      |      | 95.0 |      |      | 100.0 |            |      |  |
|                                     | TONS  | KW   | EER  | TONS  | KW   | EER  | TONS  | KW   | EER  | TONS | KW   | EER  | TONS | KW   | EER  | TONS  | KW         | EER  |  |
| 40.0                                | 91.3  | 70.5 | 13.6 | 88.9  | 74.3 | 12.7 | 86.5  | 78.4 | 11.7 | 84.1 | 82.7 | 10.9 | 81.6 | 87.4 | 10.0 | 78.5  | 92.1       | 9.2  |  |
| 42.0                                | 94.3  | 71.2 | 13.9 | 91.9  | 74.9 | 13.0 | 89.5  | 79.0 | 12.1 | 86.9 | 83.4 | 11.2 | 84.3 | 88.1 | 10.3 | 81.2  | 92.8       | 9.5  |  |
| 44.0                                | 97.4  | 71.9 | 14.3 | 95.0  | 75.6 | 13.3 | 92.4  | 79.7 | 12.4 | 89.8 | 84.1 | 11.5 | 87.1 | 88.8 | 10.6 | 83.9  | 93.5       | 9.7  |  |
| 45.0                                | 99.0  | 72.3 | 14.4 | 96.5  | 76.0 | 13.5 | 93.9  | 80.0 | 12.5 | 91.3 | 84.4 | 11.6 | 88.6 | 89.1 | 10.7 | 85.3  | 93.8       | 9.8  |  |
| 46.0                                | 100.6 | 72.6 | 14.6 | 98.0  | 76.4 | 13.6 | 95.4  | 80.4 | 12.7 | 92.8 | 84.8 | 11.7 | 90.0 | 89.5 | 10.8 | 86.7  | 94.2       | 10.0 |  |
| 48.0                                | 103.8 | 73.4 | 14.9 | 101.2 | 77.1 | 13.9 | 98.5  | 81.2 | 13.0 | 95.7 | 85.5 | 12.0 | 92.9 | 90.2 | 11.1 | 89.5  | 95.0       | 10.2 |  |
| 50.0                                | 107.1 | 74.2 | 15.2 | 104.4 | 77.9 | 14.2 | 101.6 | 81.9 | 13.3 | 98.8 | 86.3 | 12.3 | 95.8 | 91.0 | 11.4 | 92.3  | 95.7       | 10.5 |  |

| MODEL: YLAA0101YE                   |       |      |      |       |      |      |       |      |      |       |       |      |       |       |      |       | IPLV: 14.9 |     |  |
|-------------------------------------|-------|------|------|-------|------|------|-------|------|------|-------|-------|------|-------|-------|------|-------|------------|-----|--|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |      |      |       |      |      |       |      |      |       |       |      |       |       |      |       |            |     |  |
| LCHWT<br>(°F)                       | 75.0  |      |      | 80.0  |      |      | 85.0  |      |      | 90.0  |       |      | 95.0  |       |      | 100.0 |            |     |  |
|                                     | TONS  | KW   | EER  | TONS  | KW   | EER  | TONS  | KW   | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW         | EER |  |
| 40.0                                | 102.2 | 84.3 | 13.0 | 99.5  | 88.9 | 12.1 | 96.8  | 93.9 | 11.2 | 94.0  | 99.2  | 10.3 | 91.2  | 104.9 | 9.5  | 87.7  | 110.6      | 8.7 |  |
| 42.0                                | 105.5 | 85.1 | 13.3 | 102.8 | 89.7 | 12.4 | 100.0 | 94.7 | 11.5 | 97.1  | 100.1 | 10.6 | 94.2  | 105.8 | 9.8  | 90.6  | 111.4      | 9.0 |  |
| 44.0                                | 108.9 | 86.0 | 13.6 | 106.1 | 90.6 | 12.7 | 103.3 | 95.6 | 11.7 | 100.3 | 100.9 | 10.8 | 97.3  | 106.6 | 10.0 | 93.6  | 112.3      | 9.2 |  |
| 45.0                                | 110.7 | 86.4 | 13.8 | 107.8 | 91.1 | 12.8 | 104.9 | 96.0 | 11.9 | 101.9 | 101.4 | 11.0 | 98.8  | 107.1 | 10.1 | 95.1  | 112.8      | 9.3 |  |
| 46.0                                | 112.4 | 86.9 | 13.9 | 109.5 | 91.5 | 12.9 | 106.6 | 96.5 | 12.0 | 103.5 | 101.8 | 11.1 | 100.4 | 107.6 | 10.2 | 96.7  | 113.3      | 9.4 |  |
| 48.0                                | 116.0 | 87.8 | 14.2 | 113.0 | 92.5 | 13.2 | 110.0 | 97.4 | 12.3 | 106.8 | 102.8 | 11.4 | 103.6 | 108.5 | 10.5 | 99.7  | 114.2      | 9.6 |  |
| 50.0                                | 119.6 | 88.8 | 14.5 | 116.5 | 93.4 | 13.5 | 113.3 | 98.4 | 12.5 | 110.2 | 103.8 | 11.6 | 106.9 | 109.5 | 10.7 | 102.9 | 115.2      | 9.9 |  |

| MODEL: YLAA0115ZE                   |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       | IPLV: 14.3 |     |
|-------------------------------------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|------------|-----|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       |            |     |
| LCHWT<br>(°F)                       | 75.0  |       |      | 80.0  |       |      | 85.0  |       |      | 90.0  |       |      | 95.0  |       |      | 100.0 |            |     |
|                                     | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW         | EER |
| 40.0                                | 118.5 | 104.1 | 12.5 | 115.5 | 109.6 | 11.6 | 112.3 | 115.5 | 10.7 | 109.0 | 121.9 | 9.9  | 105.6 | 128.6 | 9.1  | 101.5 | 135.2      | 8.4 |
| 42.0                                | 122.4 | 105.2 | 12.7 | 119.2 | 110.7 | 11.8 | 115.9 | 116.7 | 11.0 | 112.5 | 123.1 | 10.1 | 109.0 | 129.8 | 9.4  | 104.8 | 136.5      | 8.6 |
| 44.0                                | 126.3 | 106.4 | 13.0 | 123.0 | 112.0 | 12.1 | 119.6 | 117.9 | 11.2 | 116.1 | 124.3 | 10.4 | 112.5 | 131.1 | 9.6  | 108.2 | 137.7      | 8.8 |
| 45.0                                | 128.2 | 107.0 | 13.1 | 124.9 | 112.6 | 12.2 | 121.5 | 118.5 | 11.3 | 117.9 | 124.9 | 10.5 | 114.2 | 131.7 | 9.7  | 109.9 | 138.3      | 8.9 |
| 46.0                                | 130.2 | 107.6 | 13.3 | 126.8 | 113.2 | 12.3 | 123.3 | 119.2 | 11.5 | 119.7 | 125.6 | 10.6 | 116.0 | 132.3 | 9.8  | 111.6 | 139.0      | 9.0 |
| 48.0                                | 134.2 | 108.8 | 13.5 | 130.7 | 114.5 | 12.6 | 127.1 | 120.4 | 11.7 | 123.4 | 126.9 | 10.8 | 119.6 | 133.6 | 10.0 | 115.1 | 140.3      | 9.2 |
| 50.0                                | 138.2 | 110.1 | 13.8 | 134.6 | 115.8 | 12.8 | 130.9 | 121.8 | 11.9 | 127.1 | 128.2 | 11.0 | 123.2 | 135.0 | 10.2 | 118.6 | 141.7      | 9.4 |

## NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0091YE</b> | <b>IPLV: 14.6</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 75.4  | 97.1  | 8.4 | 72.2  | 102.3 | 7.7 | 68.9  | 107.7 | 7   |
| 42.0          | 78    | 97.7  | 8.7 | 74.7  | 102.9 | 7.9 | 71.3  | 108.4 | 7.2 |
| 44.0          | 80.6  | 98.4  | 8.9 | 77.2  | 103.7 | 8.1 | 73.8  | 109.2 | 7.4 |
| 45.0          | 81.9  | 98.8  | 9   | 78.5  | 104   | 8.3 | 75    | 109.5 | 7.5 |
| 46.0          | 83.3  | 99.2  | 9.1 | 79.8  | 104.4 | 8.4 | 76.3  | 109.9 | 7.6 |
| 48.0          | 86    | 99.9  | 9.4 | 82.4  | 105.2 | 8.6 | 78.8  | 110.7 | 7.8 |
| 50.0          | 88.7  | 100.7 | 9.6 | 85.1  | 105.9 | 8.8 | 81.4  | 111.5 | 8   |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0101YE</b> | <b>IPLV: 14.9</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 84.2  | 116.5 | 8   | 80.6  | 122.8 | 7.3 | 68    | 107.3 | 7   |
| 42.0          | 87    | 117.4 | 8.2 | 83.3  | 123.7 | 7.5 | 70.4  | 108   | 7.2 |
| 44.0          | 89.9  | 118.3 | 8.4 | 86.1  | 124.6 | 7.7 | 72.8  | 108.7 | 7.4 |
| 45.0          | 91.4  | 118.8 | 8.5 | 87.5  | 125.1 | 7.8 | 74.1  | 109   | 7.5 |
| 46.0          | 92.8  | 119.2 | 8.6 | 88.9  | 125.5 | 7.9 | 75.3  | 109.4 | 7.6 |
| 48.0          | 95.8  | 120.2 | 8.8 | 91.8  | 126.5 | 8.1 | 55.5  | 69.4  | 8.4 |
| 50.0          | 98.8  | 121.2 | 9   | 94.7  | 127.5 | 8.3 | 57.5  | 69.8  | 8.6 |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0115ZE</b> | <b>IPLV: 14.3</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 97.4  | 142.2 | 7.7 | 93.1  | 149.5 | 7   | 88.7  | 157.1 | 6.4 |
| 42.0          | 100.6 | 143.4 | 7.9 | 96.2  | 150.8 | 7.2 | 91.7  | 158.4 | 6.5 |
| 44.0          | 103.8 | 144.7 | 8   | 99.3  | 152   | 7.4 | 94.7  | 159.7 | 6.7 |
| 45.0          | 105.4 | 145.3 | 8.1 | 100.9 | 152.7 | 7.4 | 96.2  | 160.3 | 6.8 |
| 46.0          | 107.1 | 146   | 8.2 | 102.5 | 153.3 | 7.5 | 56.7  | 71.3  | 8.4 |
| 48.0          | 110.4 | 147.3 | 8.4 | 105.7 | 154.7 | 7.7 | 58.7  | 71.8  | 8.6 |
| 50.0          | 113.8 | 148.7 | 8.6 | 108.9 | 156.1 | 7.9 | 60.7  | 72.3  | 8.8 |

**NOTES:**

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98



# Ratings - 60 Hz – continued

| MODEL: YLAA0120ZE                   |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      | IPLV: 14.5 |       |     |
|-------------------------------------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|------------|-------|-----|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |            |       |     |
| LCHWT<br>(°F)                       | 75.0  |       |      | 80.0  |       |      | 85.0  |       |      | 90.0  |       |      | 95.0  |       |      | 100.0      |       |     |
|                                     | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS       | KW    | EER |
| 40.0                                | 125.3 | 107.4 | 12.8 | 121.9 | 113.1 | 11.9 | 118.4 | 119.0 | 11.0 | 114.8 | 125.4 | 10.2 | 111.0 | 132.2 | 9.4  | 106.6      | 138.9 | 8.6 |
| 42.0                                | 129.4 | 108.7 | 13.1 | 125.8 | 114.3 | 12.1 | 122.2 | 120.3 | 11.3 | 118.5 | 126.8 | 10.4 | 114.7 | 133.5 | 9.6  | 110.1      | 140.2 | 8.8 |
| 44.0                                | 133.5 | 110.0 | 13.3 | 129.8 | 115.6 | 12.4 | 126.1 | 121.6 | 11.5 | 122.3 | 128.1 | 10.6 | 118.3 | 134.9 | 9.8  | 113.7      | 141.6 | 9.0 |
| 45.0                                | 135.6 | 110.6 | 13.5 | 131.9 | 116.3 | 12.5 | 128.1 | 122.3 | 11.6 | 124.2 | 128.8 | 10.7 | 120.2 | 135.6 | 9.9  | 115.5      | 142.3 | 9.1 |
| 46.0                                | 137.7 | 111.3 | 13.6 | 133.9 | 117.0 | 12.6 | 130.1 | 123.0 | 11.7 | 126.1 | 129.5 | 10.8 | 122.1 | 136.3 | 10.0 | 117.3      | 143.0 | 9.2 |
| 48.0                                | 141.9 | 112.7 | 13.9 | 138.0 | 118.4 | 12.9 | 134.1 | 124.4 | 12.0 | 130.0 | 130.9 | 11.1 | 125.9 | 137.7 | 10.2 | 120.3      | 144.2 | 9.4 |
| 50.0                                | 146.2 | 114.1 | 14.1 | 142.2 | 119.8 | 13.1 | 138.1 | 126.0 | 12.2 | 133.9 | 132.4 | 11.3 | 129.7 | 139.2 | 10.4 | 124.6      | 145.9 | 9.6 |

| MODEL: YLAA0135ZE                   |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       | IPLV: 14.9 |     |  |
|-------------------------------------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|------------|-----|--|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       |            |     |  |
| LCHWT<br>(°F)                       | 75.0  |       |      | 80.0  |       |      | 85.0  |       |      | 90.0  |       |      | 95.0  |       |      | 100.0 |            |     |  |
|                                     | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW         | EER |  |
| 40.0                                | 132.3 | 112.9 | 12.6 | 128.8 | 119.0 | 11.7 | 125.3 | 125.4 | 10.8 | 121.6 | 132.3 | 10.0 | 117.9 | 139.7 | 9.2  | 113.4 | 146.9      | 8.5 |  |
| 42.0                                | 136.6 | 114.1 | 12.9 | 133.1 | 120.2 | 12.0 | 129.4 | 126.6 | 11.1 | 125.7 | 133.5 | 10.3 | 121.8 | 140.9 | 9.5  | 117.2 | 148.1      | 8.7 |  |
| 44.0                                | 141.0 | 115.4 | 13.1 | 137.4 | 121.4 | 12.2 | 133.6 | 127.8 | 11.4 | 129.7 | 134.8 | 10.5 | 125.8 | 142.1 | 9.7  | 121.0 | 149.4      | 8.9 |  |
| 45.0                                | 143.2 | 116.0 | 13.3 | 139.5 | 122.0 | 12.4 | 135.7 | 128.5 | 11.5 | 131.8 | 135.4 | 10.6 | 127.8 | 142.8 | 9.8  | 123.0 | 150.0      | 9.0 |  |
| 46.0                                | 145.5 | 116.6 | 13.4 | 141.7 | 122.7 | 12.5 | 137.9 | 129.1 | 11.6 | 133.9 | 136.1 | 10.7 | 129.8 | 143.4 | 9.9  | 124.9 | 150.7      | 9.1 |  |
| 48.0                                | 150.0 | 117.9 | 13.7 | 146.1 | 124.0 | 12.8 | 142.2 | 130.5 | 11.9 | 138.1 | 137.4 | 11.0 | 133.9 | 144.8 | 10.2 | 128.8 | 152.1      | 9.3 |  |
| 50.0                                | 154.6 | 119.3 | 14.0 | 150.6 | 125.4 | 13.0 | 146.5 | 131.9 | 12.1 | 142.3 | 138.8 | 11.2 | 138.0 | 146.1 | 10.4 | 132.8 | 153.5      | 9.6 |  |

| MODEL: YLAA0150ZE                   |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       | IPLV: 14.9 |     |  |
|-------------------------------------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|------------|-----|--|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |       |      |       |       |      |       |       |      |       |       |      |       |       |      |       |            |     |  |
| LCHWT<br>(°F)                       | 75.0  |       |      | 80.0  |       |      | 85.0  |       |      | 90.0  |       |      | 95.0  |       |      | 100.0 |            |     |  |
|                                     | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW         | EER |  |
| 40.0                                | 146.0 | 127.7 | 12.4 | 142.2 | 134.5 | 11.5 | 138.3 | 141.8 | 10.7 | 134.3 | 149.6 | 9.9  | 130.1 | 157.8 | 9.1  | 125.1 | 166.0      | 8.4 |  |
| 42.0                                | 150.7 | 129.0 | 12.7 | 146.8 | 135.9 | 11.8 | 142.8 | 143.1 | 10.9 | 138.6 | 151.0 | 10.1 | 134.4 | 159.2 | 9.3  | 129.2 | 167.4      | 8.6 |  |
| 44.0                                | 155.5 | 130.4 | 13.0 | 151.5 | 137.3 | 12.1 | 147.4 | 144.6 | 11.2 | 143.1 | 152.4 | 10.3 | 138.7 | 160.7 | 9.6  | 133.4 | 168.9      | 8.8 |  |
| 45.0                                | 158.0 | 131.1 | 13.1 | 153.9 | 138.0 | 12.2 | 149.7 | 145.3 | 11.3 | 145.3 | 153.2 | 10.5 | 140.9 | 161.5 | 9.7  | 135.5 | 169.7      | 8.9 |  |
| 46.0                                | 160.4 | 131.8 | 13.2 | 156.2 | 138.8 | 12.3 | 152.0 | 146.1 | 11.4 | 147.6 | 153.9 | 10.6 | 143.0 | 162.2 | 9.8  | 137.6 | 170.5      | 9.0 |  |
| 48.0                                | 165.3 | 133.3 | 13.5 | 161.1 | 140.3 | 12.6 | 156.7 | 147.6 | 11.7 | 152.1 | 155.5 | 10.8 | 147.5 | 163.8 | 10.0 | 141.9 | 172.0      | 9.2 |  |
| 50.0                                | 170.3 | 134.9 | 13.8 | 165.9 | 141.8 | 12.8 | 161.4 | 149.3 | 11.9 | 156.8 | 157.1 | 11.0 | 152.0 | 165.4 | 10.2 | 146.2 | 173.6      | 9.4 |  |

## NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0120ZE</b> | <b>IPLV: 14.5</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 102.1 | 145.9 | 7.9 | 97.4  | 153.2 | 7.2 | 92.7  | 160.9 | 6.5 |
| 42.0          | 105.5 | 147.3 | 8   | 100.7 | 154.6 | 7.3 | 74.8  | 116.8 | 7.1 |
| 44.0          | 108.9 | 148.6 | 8.2 | 104.1 | 156   | 7.5 | 56.1  | 72    | 8.2 |
| 45.0          | 110.7 | 149.3 | 8.3 | 105.7 | 156.7 | 7.6 | 57.1  | 72.3  | 8.3 |
| 46.0          | 112.4 | 150.1 | 8.4 | 107.4 | 157.4 | 7.7 | 58.1  | 72.5  | 8.4 |
| 48.0          | 115.9 | 151.5 | 8.6 | 110.8 | 158.9 | 7.9 | 60.1  | 73    | 8.7 |
| 50.0          | 119.5 | 153   | 8.8 | 114.2 | 160.4 | 8   | 62.2  | 73.5  | 8.9 |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0135ZE</b> | <b>IPLV: 14.9</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 108.8 | 154.6 | 7.8 | 104.1 | 162.6 | 7.1 | 83.3  | 125.2 | 7.2 |
| 42.0          | 112.4 | 155.8 | 8   | 107.6 | 163.9 | 7.3 | 86.2  | 126   | 7.4 |
| 44.0          | 116.1 | 157.1 | 8.2 | 111.2 | 165.2 | 7.5 | 89.2  | 126.8 | 7.6 |
| 45.0          | 118   | 157.7 | 8.3 | 113   | 165.8 | 7.6 | 90.7  | 127.2 | 7.7 |
| 46.0          | 119.9 | 158.4 | 8.4 | 114.8 | 166.5 | 7.7 | 92.2  | 127.7 | 7.8 |
| 48.0          | 123.7 | 159.8 | 8.6 | 118.5 | 167.9 | 7.8 | 95.3  | 128.5 | 8.1 |
| 50.0          | 127.6 | 161.2 | 8.8 | 122.2 | 169.3 | 8   | 98.4  | 129.4 | 8.3 |

|                          |                   |
|--------------------------|-------------------|
| <b>MODEL: YLAA0150ZE</b> | <b>IPLV: 14.9</b> |
|--------------------------|-------------------|

**AIR TEMPERATURE ON - CONDENSER (°F)**

| LCHWT<br>(°F) | 105.0 |       |     | 110.0 |       |     | 115.0 |       |     |
|---------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|
|               | TONS  | KW    | EER | TONS  | KW    | EER | TONS  | KW    | EER |
| 40.0          | 120   | 174.6 | 7.7 | 114.8 | 183.6 | 7   | 93.4  | 147.1 | 7   |
| 42.0          | 124   | 176   | 7.9 | 118.7 | 185.1 | 7.2 | 96.6  | 148.1 | 7.2 |
| 44.0          | 128   | 177.5 | 8   | 122.5 | 186.6 | 7.4 | 99.9  | 149.2 | 7.4 |
| 45.0          | 130.1 | 178.3 | 8.1 | 124.5 | 187.4 | 7.4 | 101.6 | 149.7 | 7.5 |
| 46.0          | 132.1 | 179.1 | 8.2 | 126.5 | 188.1 | 7.5 | 103.2 | 150.3 | 7.6 |
| 48.0          | 136.2 | 180.7 | 8.4 | 130.4 | 189.7 | 7.7 | 106.6 | 151.4 | 7.8 |
| 50.0          | 140.4 | 182.3 | 8.6 | 134.5 | 191.4 | 7.9 | 110   | 152.5 | 8   |

## NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

# Ratings - 60 Hz – continued

MODEL: YLAA0155ZE

IPLV: 14.8

## AIR TEMPERATURE ON - CONDENSER (°F)

| LCHWT<br>(°F) | 75.0  |       |      | 80.0  |       |      | 85.0  |       |      | 90.0  |       |      | 95.0  |       |      | 100.0 |       |     |
|---------------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|------|-------|-------|-----|
|               | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER  | TONS  | KW    | EER |
| 40.0          | 149.4 | 130.1 | 12.5 | 145.4 | 137.0 | 11.6 | 141.4 | 144.3 | 10.8 | 137.1 | 152.2 | 9.9  | 132.8 | 160.5 | 9.2  | 127.6 | 168.7 | 8.4 |
| 42.0          | 154.3 | 131.6 | 12.8 | 150.2 | 138.5 | 11.9 | 146.0 | 145.8 | 11.0 | 141.6 | 153.7 | 10.2 | 137.1 | 162.0 | 9.4  | 131.8 | 170.3 | 8.6 |
| 44.0          | 159.2 | 133.1 | 13.0 | 154.9 | 140.0 | 12.1 | 150.6 | 147.3 | 11.2 | 146.1 | 155.2 | 10.4 | 141.6 | 163.5 | 9.6  | 136.1 | 171.8 | 8.8 |
| 45.0          | 161.6 | 133.8 | 13.2 | 157.4 | 140.8 | 12.2 | 153.0 | 148.1 | 11.4 | 148.4 | 156.0 | 10.5 | 143.8 | 164.3 | 9.7  | 138.2 | 172.6 | 8.9 |
| 46.0          | 164.1 | 134.6 | 13.3 | 159.8 | 141.5 | 12.4 | 155.4 | 148.9 | 11.5 | 150.7 | 156.8 | 10.6 | 146.0 | 165.1 | 9.8  | 140.4 | 173.4 | 9.0 |
| 48.0          | 169.2 | 136.1 | 13.6 | 164.6 | 143.1 | 12.6 | 160.1 | 150.6 | 11.7 | 155.4 | 158.4 | 10.9 | 150.6 | 166.8 | 10.0 | 144.8 | 175.1 | 9.2 |
| 50.0          | 174.3 | 137.8 | 13.8 | 169.7 | 144.8 | 12.9 | 164.9 | 152.3 | 11.9 | 160.1 | 160.1 | 11.1 | 155.1 | 168.5 | 10.2 | 149.2 | 176.8 | 9.4 |

### NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

| MODEL: YLAA0155ZE                   |       |       |     |       |       |     | IPLV: 14.8 |       |     |
|-------------------------------------|-------|-------|-----|-------|-------|-----|------------|-------|-----|
| AIR TEMPERATURE ON - CONDENSER (°F) |       |       |     |       |       |     |            |       |     |
| LCHWT<br>(°F)                       | 105.0 |       |     | 110.0 |       |     | 115.0      |       |     |
|                                     | TONS  | KW    | EER | TONS  | KW    | EER | TONS       | KW    | EER |
| 40.0                                | 122.3 | 177.4 | 7.7 | 116.9 | 186.4 | 7   | 94.5       | 149   | 7   |
| 42.0                                | 126.4 | 178.9 | 7.9 | 120.8 | 188   | 7.2 | 97.8       | 150.1 | 7.2 |
| 44.0                                | 130.5 | 180.5 | 8.1 | 124.8 | 189.6 | 7.4 | 101.2      | 151.2 | 7.4 |
| 45.0                                | 132.6 | 181.3 | 8.2 | 126.8 | 190.4 | 7.5 | 102.9      | 151.8 | 7.5 |
| 46.0                                | 134.7 | 182.1 | 8.3 | 128.8 | 191.2 | 7.6 | 104.4      | 152.3 | 7.6 |
| 48.0                                | 138.9 | 183.8 | 8.4 | 132.9 | 192.9 | 7.7 | 108        | 153.5 | 7.8 |
| 50.0                                | 143.1 | 185.5 | 8.6 | 116.7 | 147.3 | 8.7 | 111.5      | 154.7 | 8   |

## NOTES:

1. kW = Compressor Input Power
2. EER = Chiller EER (includes power from compressors, fans, and the control panels 0.8 kW)
3. LCWT = Leaving Chilled Water Temperature
4. Ratings are based upon 2.4 GPM evaporator water per ton and 0.0001 fouling factor
5. Rated in accordance with ARI Standard 550/590
6. The shaded points are certified in accordance with ARI Standard 550/590-98

# Part Load Ratings – Standard Efficiency

| YLAA0070SE     |            |       |         |      |
|----------------|------------|-------|---------|------|
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 66.0  | 75.8    | 9.6  |
| 83.3           | 88.3       | 58.6  | 56.8    | 11.1 |
| 66.7           | 80.9       | 50.5  | 39.9    | 13.0 |
| 50.0           | 70.8       | 39.4  | 26.6    | 14.9 |
| 33.3           | 60.0       | 27.4  | 15.5    | 17.5 |
| 16.7           | 55.0       | 13.7  | 7.3     | 18.3 |
| IPLV: 15.1 EER |            |       |         |      |
| YLAA0080SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 72.8  | 84.2    | 9.6  |
| 83.6           | 88.4       | 64.8  | 64.2    | 11.0 |
| 66.7           | 80.6       | 55.3  | 43.5    | 13.2 |
| 50.3           | 71.0       | 43.6  | 29.9    | 15.0 |
| 33.3           | 59.3       | 29.5  | 17.1    | 17.3 |
| 16.9           | 55.0       | 15.6  | 9.0     | 17.5 |
| IPLV: 15.1 EER |            |       |         |      |
| YLAA0090SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 85.8  | 97.3    | 9.9  |
| 83.6           | 88.1       | 76.0  | 72.5    | 11.5 |
| 49.3           | 69.3       | 49.1  | 31.7    | 16.0 |
| 32.8           | 59.8       | 35.5  | 19.8    | 18.4 |
| 16.4           | 55.0       | 16.7  | 9.3     | 18.3 |
| IPLV: 15.6 EER |            |       |         |      |
| YLAA0100SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 98.0       | 95.8  | 110.7   | 9.6  |
| 86.1           | 89.1       | 86.4  | 86.9    | 10.9 |
| 57.0           | 75.6       | 64.8  | 45.6    | 14.4 |
| 43.0           | 65.1       | 48.0  | 34.6    | 14.5 |
| 13.9           | 55.0       | 16.0  | 9.1     | 17.8 |
| IPLV: 14.3 EER |            |       |         |      |
| YLAA0115SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 113.9 | 131.1   | 9.7  |
| 75.0           | 84.3       | 93.6  | 83.9    | 12.0 |
| 50.0           | 72.0       | 70.2  | 45.2    | 15.3 |
| 25.0           | 55.0       | 33.3  | 22.8    | 16.3 |
| IPLV: 14.6 EER |            |       |         |      |

| YLAA0120SE     |            |       |         |      |
|----------------|------------|-------|---------|------|
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 119.7 | 133.2   | 10.0 |
| 75.0           | 83.9       | 97.6  | 84.7    | 12.4 |
| 50.0           | 70.8       | 71.5  | 44.8    | 15.6 |
| 25.0           | 55.0       | 33.4  | 22.9    | 16.3 |
| IPLV: 14.8 EER |            |       |         |      |
| YLAA0135SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 127.3 | 141.1   | 9.9  |
| 75.0           | 81.3       | 98.2  | 75.7    | 32.2 |
| 50.0           | 67.8       | 69.5  | 44.4    | 16.3 |
| 25.0           | 55.0       | 35.0  | 19.5    | 18.4 |
| IPLV: 15.5 EER |            |       |         |      |
| YLAA0150SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 140.4 | 161.3   | 9.6  |
| 80.0           | 87.7       | 123.2 | 112.7   | 11.7 |
| 60.0           | 77.1       | 98.6  | 73      | 13.7 |
| 40.0           | 64.5       | 69.0  | 43.3    | 16.6 |
| 20.0           | 55.0       | 34.7  | 19.7    | 18.1 |
| IPLV: 15.2 EER |            |       |         |      |
| YLAA0155SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 143.3 | 162.5   | 9.8  |
| 80.0           | 87.5       | 125.3 | 113.2   | 11.9 |
| 60.0           | 76.6       | 99.3  | 72.9    | 13.8 |
| 40.0           | 63.7       | 68.6  | 42.9    | 16.6 |
| 20.0           | 55.0       | 36.1  | 20      | 18.5 |
| IPLV: 15.2 EER |            |       |         |      |
| YLAA0170SE     |            |       |         |      |
| % DISPL        | AMBIENT °F | TONS  | COMP KW | EER  |
| 100.0          | 95.0       | 167.8 | 187.7   | 9.8  |
| 83.3           | 88.4       | 149.3 | 141.2   | 11.3 |
| 66.7           | 81.2       | 129.1 | 100     | 13.3 |
| 50.0           | 71.3       | 101.4 | 66.9    | 15.2 |
| 33.3           | 60.8       | 72.1  | 38.8    | 16.6 |
| 16.7           | 55.0       | 35.6  | 18.6    | 18.0 |
| IPLV: 15.1 EER |            |       |         |      |

# Part Load Ratings – High Efficiency

YLAA0091HE

| % DISPL | AMBIENT °F | TONS | COMP KW | EER  |
|---------|------------|------|---------|------|
| 100.0   | 95.0       | 88.2 | 88.2    | 10.8 |
| 83.8    | 88.3       | 78.3 | 67.2    | 12.2 |
| 50.0    | 70.0       | 51.5 | 31.2    | 14.9 |
| 16.2    | 55.0       | 16.1 | 8.9     | 18.3 |

IPLV: 14.9 EER

YLAA0101HE

| % DISPL | AMBIENT °F | TONS | COMP KW | EER  |
|---------|------------|------|---------|------|
| 100.0   | 95.0       | 98.5 | 106.1   | 10.2 |
| 86.1    | 89.4       | 89.2 | 82.3    | 11.6 |
| 57.0    | 75.3       | 66.1 | 44.3    | 14.6 |
| 43.0    | 65.7       | 50.5 | 31.5    | 16.6 |
| 13.9    | 55.0       | 16.1 | 9       | 18.1 |

IPLV: 15.4 EER

YLAA0125HE

| % DISPL | AMBIENT °F | TONS  | COMP KW | EER  |
|---------|------------|-------|---------|------|
| 100.0   | 95.0       | 117.0 | 120.6   | 10.5 |
| 75.0    | 83.9       | 95.3  | 77.6    | 12.6 |
| 50.0    | 70.0       | 68.2  | 45.3    | 15.7 |
| 25.0    | 55.0       | 33.0  | 22.1    | 16.7 |

IPLV: 14.9 EER

YLAA0141HE

| % DISPL | AMBIENT °F | TONS  | COMP KW | EER  |
|---------|------------|-------|---------|------|
| 100.0   | 95.0       | 131.1 | 139     | 10.3 |
| 77.7    | 86.3       | 112.0 | 93      | 12.6 |
| 67.0    | 78.3       | 94.5  | 81.7    | 12.6 |
| 44.7    | 65.4       | 66.5  | 46.2    | 15.6 |
| 22.3    | 55.0       | 32.3  | 21.8    | 16.5 |

IPLV: 14.4 EER

YLAA0156HE

| % DISPL | AMBIENT °F | TONS  | COMP KW | EER  |
|---------|------------|-------|---------|------|
| 100.0   | 95.0       | 145.5 | 150.3   | 10.4 |
| 80.0    | 87.1       | 126.4 | 106.8   | 12.3 |
| 60.0    | 75.6       | 98.6  | 72      | 14.4 |
| 40.0    | 64.2       | 70.9  | 41      | 16.7 |
| 20.0    | 55.0       | 34.9  | 19.3    | 18.5 |

IPLV: 15.5 EER

YLAA0175HE

| % DISPL | AMBIENT °F | TONS  | COMP KW | EER  |
|---------|------------|-------|---------|------|
| 100.0   | 95.0       | 174.2 | 190     | 10.1 |
| 83.3    | 88.2       | 154.4 | 142.4   | 11.6 |
| 66.7    | 80.6       | 132.5 | 100.3   | 13.6 |
| 50.0    | 70.4       | 102.9 | 66.7    | 15.4 |
| 33.3    | 59.6       | 71.5  | 38.3    | 16.6 |
| 16.7    | 55.0       | 35.1  | 18.6    | 17.8 |

IPLV: 15.1 EER





# Physical Data - English

| Refrigerant R-410A                      | Model Number YLAA |             |             |             |
|-----------------------------------------|-------------------|-------------|-------------|-------------|
|                                         | 0070ZE            | 0080ZE      | 0090ZE      | 0091YE      |
| <b>General Unit Data</b>                |                   |             |             |             |
| Nominal Tons, R-410A                    | 65.2              | 71.9        | 84.6        | 87.1        |
| Length                                  | 116.1             | 116.1       | 116.1       | 142.7       |
| Width                                   | 88.0              | 88.0        | 88.0        | 88.0        |
| Height                                  | 95.3              | 95.3        | 95.3        | 95.3        |
| Number of Refrigerant Circuits          | 2                 | 2           | 2           | 2           |
| <b>Refrigerant Charge, Operating</b>    |                   |             |             |             |
| R-410A, ckt1 / ckt2, lbs                | 58/54             | 62/57       | 64/61       | 85/81       |
| Oil Charge, ckt1 / ckt2, gallons        | 2.58 / 2.58       | 3.28 / 2.58 | 3.28 / 2.76 | 2.76 / 2.76 |
| <b>Shipping Weight</b>                  |                   |             |             |             |
| Aluminum Fin Coils                      | 4464              | 4893        | 5301        | 5862        |
| Copper Fin Coils                        | 5264              | 5693        | 6101        | 7062        |
| <b>Operating Weight</b>                 |                   |             |             |             |
| Aluminum Fin Coils                      | 4802              | 5300        | 5787        | 6290        |
| Copper Fin Coils                        | 5602              | 6100        | 6587        | 7490        |
| <b>Compressors, scroll type</b>         |                   |             |             |             |
| Compressors per circuit                 | 3/3               | 3/3         | 3/2         | 2/2         |
| Compressors per unit                    | 6                 | 6           | 5           | 4           |
| <b>Nominal Tons per compressor</b>      |                   |             |             |             |
| Circuit 1                               | 13                | 15          | 15          | 15/32       |
| Circuit 2                               | 13                | 13          | 15/32       | 15/32       |
| <b>Tube and Fin Condenser</b>           |                   |             |             |             |
| Total Face Area ft <sup>2</sup>         | 106.9             | 106.9       | 106.9       | 160.3       |
| Number of Rows                          | 3                 | 3           | 3           | 3           |
| Fins per Inch                           | 17                | 17          | 17          | 17          |
| <b>Condenser Fans, Low Sound</b>        |                   |             |             |             |
| Number of Fans, ckt1./ckt2.             | 2/2               | 2/2         | 2/2         | 3/3         |
| Fan hp                                  | 2                 | 2           | 2           | 2           |
| Fan RPM                                 | 1160              | 1160        | 1160        | 1160        |
| Total Chiller CFM                       | 52000             | 52000       | 52000       | 78000       |
| <b>Evaporator</b>                       |                   |             |             |             |
| Water Volume, gallons                   | 40                | 49          | 58          | 51          |
| Maximum Water Side Pressure, PSIG       | 150               | 150         | 150         | 150         |
| Maximum Refrigerant Side Pressure, PSIG | 450               | 450         | 450         | 450         |
| Water Connections Size, inches          | 6                 | 6           | 8           | 6           |



| Model Number YLAA |             |             |             |             |             |
|-------------------|-------------|-------------|-------------|-------------|-------------|
| 0101YE            | 0115ZE      | 0120ZE      | 0135ZE      | 0150ZE      | 0155ZE      |
| 97.3              | 112.5       | 118.3       | 125.8       | 138.7       | 141.6       |
| 142.7             | 142.7       | 142.7       | 187.7       | 187.7       | 187.7       |
| 88.0              | 88.0        | 88.0        | 88.0        | 88.0        | 88.0        |
| 95.3              | 95.3        | 95.3        | 95.3        | 95.3        | 95.3        |
| 2                 | 2           | 2           | 2           | 2           | 2           |
| 62/106            | 87/84       | 91/88       | 116/106     | 116/108     | 118/111     |
| 3.28 / 3.33       | 3.33 / 3.33 | 3.33 / 3.33 | 4.99 / 2.76 | 4.99 / 3.33 | 4.99 / 3.33 |
| 6097              | 6172        | 6449        | 7507        | 7662        | 7856        |
| 7297              | 7372        | 7649        | 9107        | 9262        | 9456        |
| 6525              | 6600        | 7001        | 7964        | 8119        | 8408        |
| 7725              | 7800        | 8201        | 9564        | 9719        | 10008       |
| 3/2               | 2/2         | 2/2         | 3/2         | 3/2         | 3/2         |
| 5                 | 4           | 4           | 5           | 5           | 5           |
| 15                | 32          | 32          | 32          | 32          | 32          |
| 32                | 32          | 32          | 15/32       | 32          | 32          |
| 160.3             | 160.3       | 160.3       | 213.8       | 213.8       | 213.8       |
| 3                 | 3           | 3           | 3           | 3           | 3           |
| 17                | 17          | 17          | 17          | 17          | 17          |
| 2/4               | 3/3         | 3/3         | 4/4         | 4/4         | 4/4         |
| 2                 | 2           | 2           | 2           | 2           | 2           |
| 1160              | 1160        | 1160        | 1160        | 1160        | 1160        |
| 78000             | 78000       | 78000       | 104000      | 104000      | 104000      |
| 51                | 51          | 66          | 55          | 55          | 66          |
| 150               | 150         | 150         | 150         | 150         | 150         |
| 450               | 450         | 450         | 450         | 450         | 450         |
| 6                 | 6           | 8           | 8           | 8           | 8           |

# Dimensions – Four Fan Units

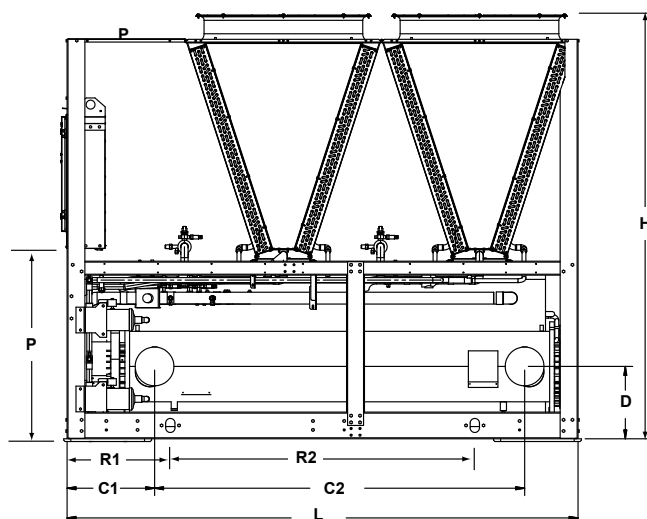
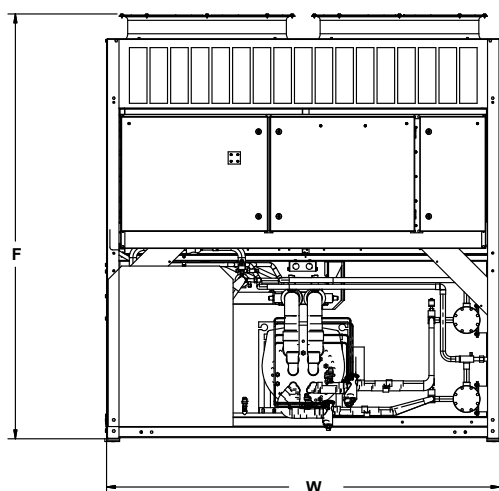
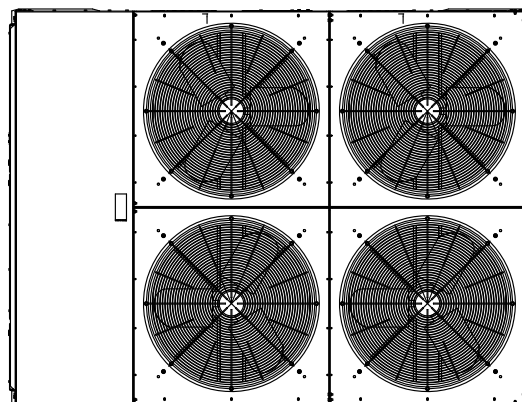



| YLA Model | L<br>(length) | W<br>(width) | H<br>(height) | F    | P    | D    | C1   | C2   | R2   | R1   |
|-----------|---------------|--------------|---------------|------|------|------|------|------|------|------|
| YLA0070ZE | 116.0         | 88.3         | 95.3          | 89.6 | 43.9 | 13.4 | 19.0 | 84.5 | 68.3 | 23.0 |
| YLA0080ZE | 116.0         | 88.3         | 95.3          | 89.6 | 43.9 | 15.0 | 18.6 | 85.0 | 68.3 | 23.0 |
| YLA0090ZE | 116.0         | 88.3         | 95.3          | 89.6 | 43.9 | 16.3 | 19.6 | 83.0 | 68.3 | 23.0 |

## NOTE:

Placement on a level surface of free of obstructions (including snow, for winter operation) or air circulation ensures rated performance, reliable operation, and ease of maintenance. Site restrictions may compromise minimum clearances indicated below, resulting in unpredictable airflow patterns and possible diminished performance. Johnson Controls's unit controls will optimize operation without nuisance high-pressure safety cutouts; however, the system designer must consider potential performance degradation. Access to the unit control center assumes the unit is no higher than on spring isolators. Recommended minimum clearances: Side to wall – 6"; rear to wall – 6"; control panel to end wall – 4'0"; top – no obstructions allowed; distance between adjacent units – 10'. No more than one adjacent wall may be higher than the unit.

# Dimensions – Six Fan Units

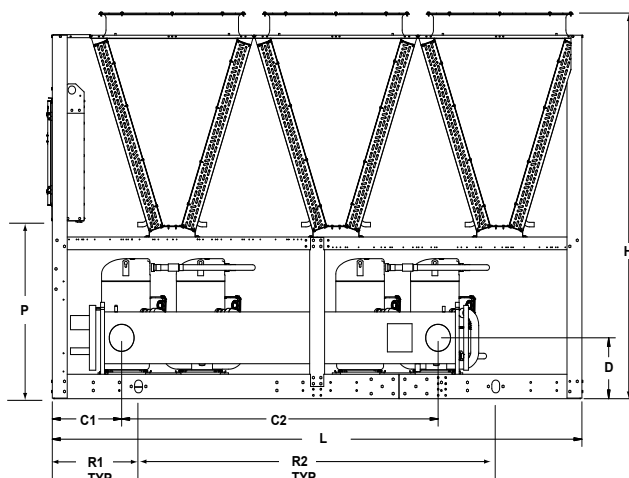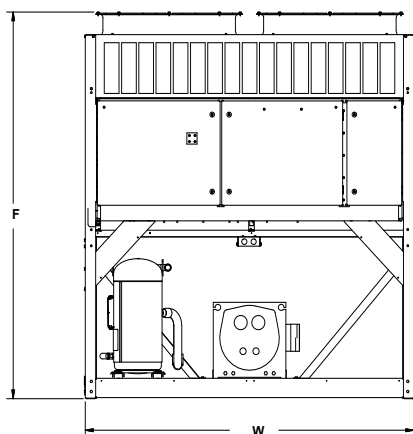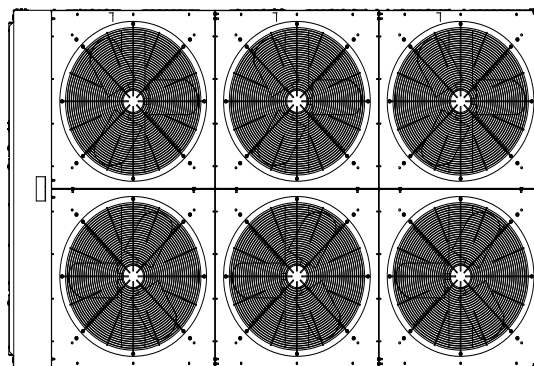


| YLA Model | L<br>(length) | W<br>(width) | H<br>(height) | F    | P    | D    | C1   | C2    | R2   | R1   |
|-----------|---------------|--------------|---------------|------|------|------|------|-------|------|------|
| YLA0091YE | 143.5         | 88.3         | 95.3          | 89.6 | 43.9 | 15.0 | 18.6 | 85.0  | 96.0 | 23.0 |
| YLA0101YE | 143.5         | 88.3         | 95.3          | 89.6 | 43.9 | 15.0 | 18.6 | 85.0  | 96.0 | 23.0 |
| YLA0115ZE | 143.5         | 88.3         | 95.3          | 89.6 | 43.9 | 15.0 | 18.6 | 85.0  | 96.0 | 23.0 |
| YLA0120ZE | 143.5         | 88.3         | 95.3          | 89.6 | 43.9 | 17.3 | 22.0 | 102.0 | 96.0 | 23.0 |

## NOTE:

Placement on a level surface of free of obstructions (including snow, for winter operation) or air circulation ensures rated performance, reliable operation, and ease of maintenance. Site restrictions may compromise minimum clearances indicated below, resulting in unpredictable airflow patterns and possible diminished performance. Johnson Controls's unit controls will optimize operation without nuisance high-pressure safety cutouts; however, the system designer must consider potential performance degradation. Access to the unit control center assumes the unit is no higher than on spring isolators. Recommended minimum clearances: Side to wall – 6'; rear to wall – 6'; control panel to end wall – 4'0"; top – no obstructions allowed; distance between adjacent units – 10'. No more than one adjacent wall may be higher than the unit.

# Dimensions – Eight Fan Units

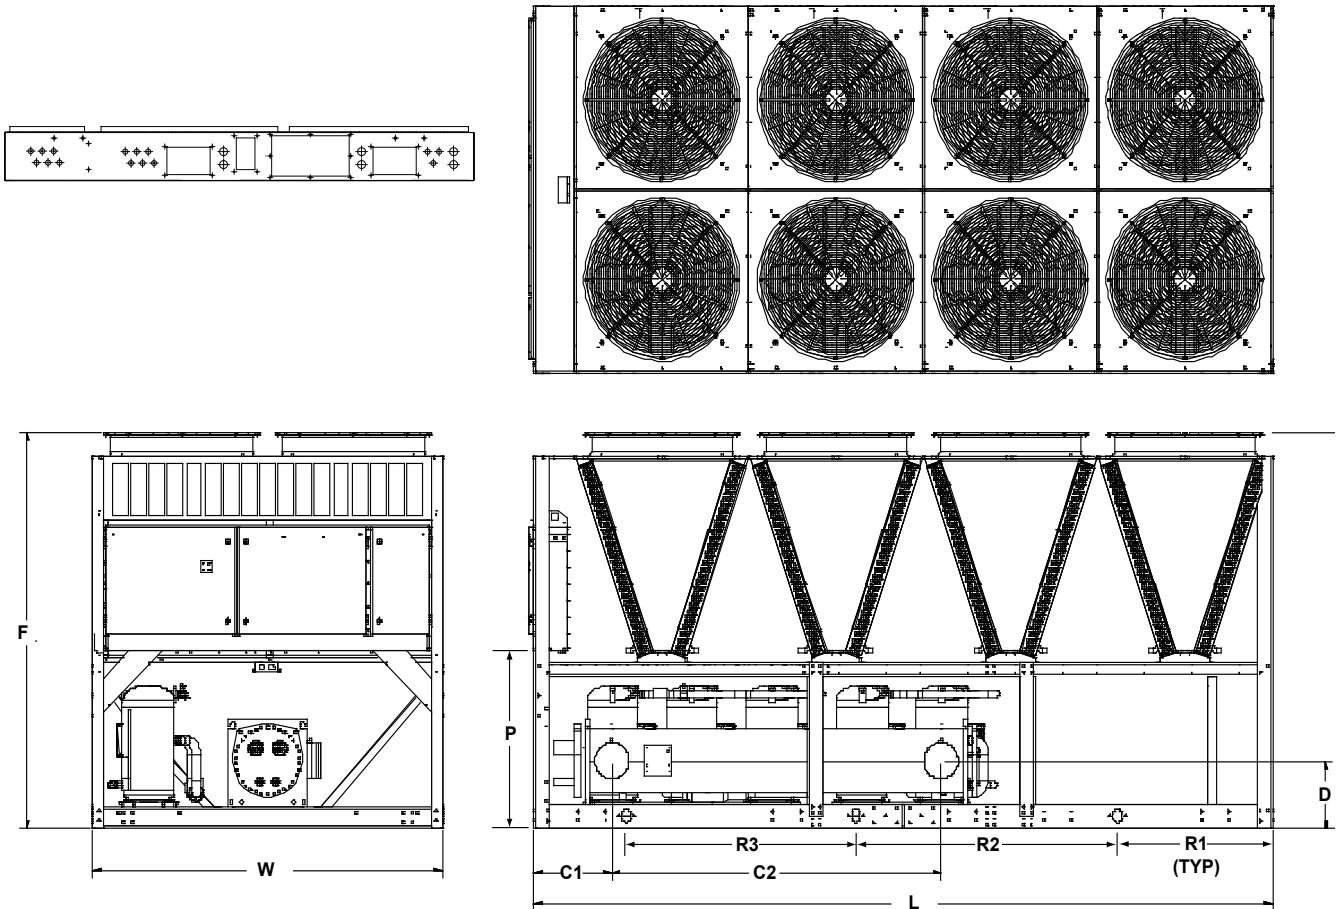


| YLAA Model | L<br>(length) | W<br>(width) | H<br>(height) | F    | P      | D     | C1   | C2  | R3 | R2   | R1   |
|------------|---------------|--------------|---------------|------|--------|-------|------|-----|----|------|------|
| YLAA0135ZE | 187.5         | 88.25        | 95.3          | 89.6 | 43.875 | 16.25 | 19.6 | 83  | 58 | 65.9 | 39.2 |
| YLAA0150ZE | 187.5         | 88.25        | 95.3          | 89.6 | 43.875 | 16.25 | 19.6 | 83  | 58 | 65.9 | 39.2 |
| YLAA0155ZE | 187.5         | 88.25        | 95.3          | 89.6 | 43.875 | 17.25 | 22   | 102 | 58 | 65.9 | 39.2 |


## NOTE:

Placement on a level surface of free of obstructions (including snow, for winter operation) or air circulation ensures rated performance, reliable operation, and ease of maintenance. Site restrictions may compromise minimum clearances indicated below, resulting in unpredictable airflow patterns and possible diminished performance. Johnson Controls's unit controls will optimize operation without nuisance high-pressure safety cutouts; however, the system designer must consider potential performance degradation. Access to the unit control center assumes the unit is no higher than on spring isolators. Recommended minimum clearances: Side to wall – 6'; rear to wall – 6'; control panel to end wall – 4'0"; top – no obstructions allowed; distance between adjacent units – 10'. No more than one adjacent wall may be higher than the unit.

# Isolator Locations

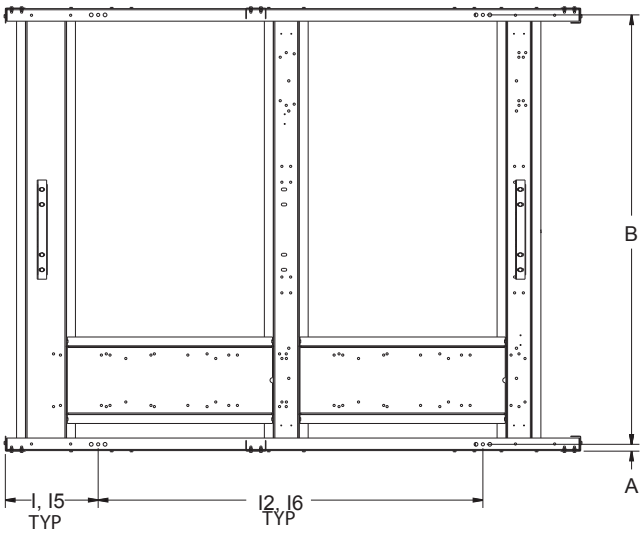


| AVM LOCATIONS |      |      |      |      |
|---------------|------|------|------|------|
| YLAA Model    | I1   | I2   | A    | B    |
| YLAA0070ZE    | 19.5 | 76.6 | 1.36 | 85.5 |
| YLAA0080ZE    | 19.5 | 76.6 | 1.36 | 85.5 |
| YLAA0090ZE    | 19.5 | 76.6 | 1.36 | 85.5 |

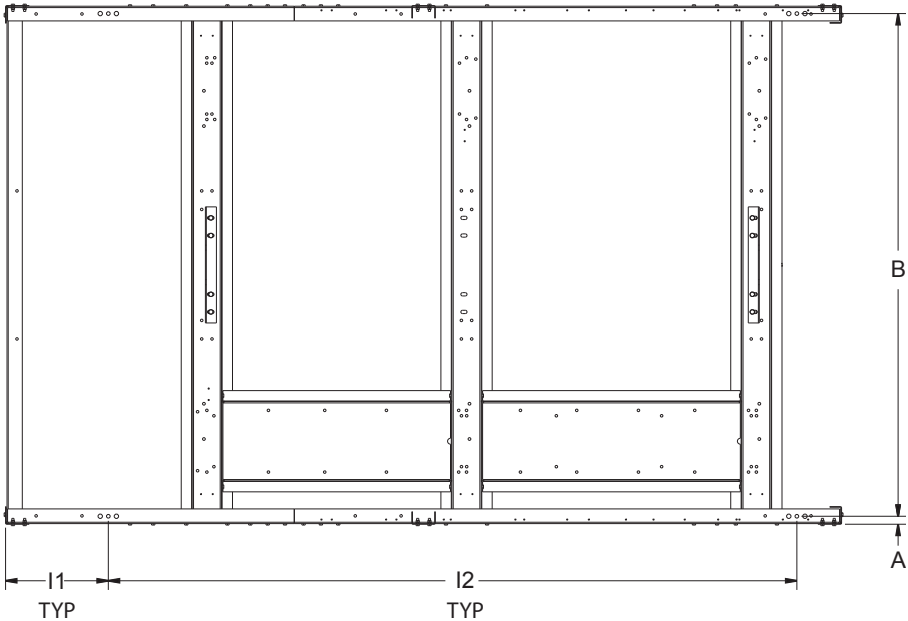

| YLAA Model | AVM LOCATIONS |       |     |      |
|------------|---------------|-------|-----|------|
|            | I1            | I2    | A   | B    |
| YLAA0091YE | 7.6           | 117.2 | 1.4 | 85.5 |
| YLAA0101YE | 7.6           | 117.2 | 1.4 | 85.5 |
| YLAA0115ZE | 7.6           | 117.2 | 1.4 | 85.5 |
| YLAA0120ZE | 7.6           | 117.2 | 1.4 | 85.5 |


# Isolator Locations - continued

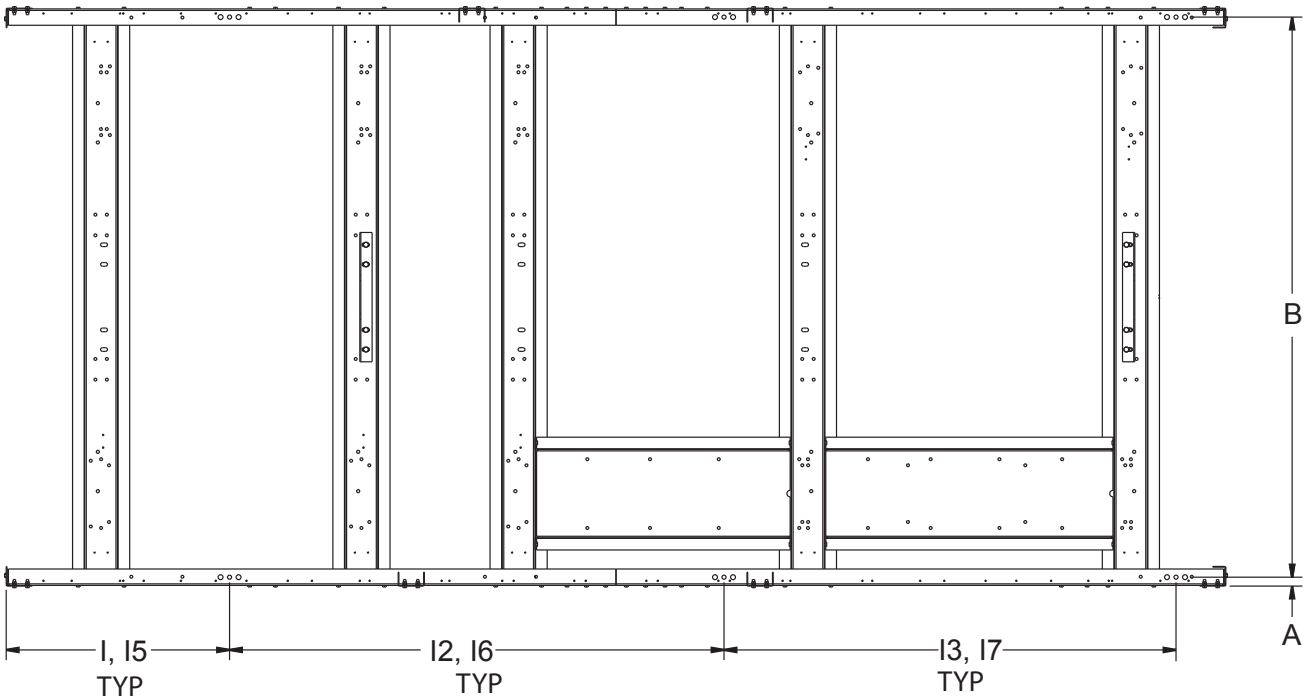

| YLAA Model | AVM LOCATIONS |      |      |     |      |
|------------|---------------|------|------|-----|------|
|            | I1            | I2   | I3   | A   | B    |
| YLAA0035ZE | 7.6           | 69.0 | 80.0 | 1.4 | 85.5 |
| YLAA0150ZE | 7.6           | 69.0 | 80.0 | 1.4 | 85.5 |
| YLAA0155ZE | 7.6           | 69.0 | 80.0 | 1.4 | 85.5 |

## ONE INCH DEFLECTION SPRING ISOLATOR CROSS-REFERENCE

### CPX-X-

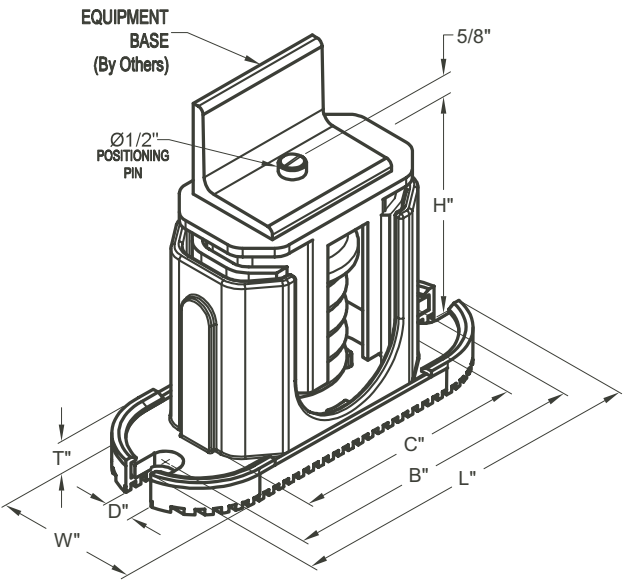

| Mount Type | Dimension Data (Inches) |     |        |       |       |      |       |
|------------|-------------------------|-----|--------|-------|-------|------|-------|
|            | W                       | D   | L      | B     | C     | T    | H     |
| CP1        | 3                       | 5/8 | 7-3/4  | 6-1/2 | 4-3/4 | 1/2  | 5-5/8 |
| CP2        | 3                       | 5/8 | 10-1/2 | 9-1/4 | 7-3/4 | 9/16 | 6     |


| MODEL NUMBER | RATED CAPACITY (LBS.) | DEFLECTION RATED (IN) | COLOR CODE |
|--------------|-----------------------|-----------------------|------------|
| CP1-1D-85    | 85                    | 1.360                 | LT. PURPLE |
| CP1-1D-120   | 120                   | 1.200                 | DK. YELLOW |
| CP1-1D-175   | 175                   | 1.170                 | DK. BLUE   |
| CP1-1D-250   | 250                   | 1.400                 | YELLOW     |
| CP1-1D-340   | 340                   | 1.130                 | RED        |
| CP1-1D-510   | 510                   | 1.020                 | BLACK      |
| CP1-1D-675   | 675                   | 1.320                 | DK. PURPLE |
| CP1-1D-900   | 900                   | 1.020                 | DK. GREEN  |
| CP1-1D-1200  | 1200                  | 0.900                 | GRAY       |
| CP1-1D-1360  | 1360                  | 0.770                 | WHITE      |
| CP1-1D-1785N | 1785                  | 0.880                 | GRAY/RED   |

| MODEL NUMBER | RATED CAPACITY (LBS.) | DEFLECTION RATED (IN) | COLOR CODE |
|--------------|-----------------------|-----------------------|------------|
| CP2-1D-1020  | 1020                  | 1.020                 | BLACK      |
| CP2-1D-1350  | 1350                  | 1.320                 | DK. PURPLE |
| CP2-1D-1800  | 1800                  | 1.020                 | DK. GREEN  |
| CP2-1D-2400  | 2400                  | 0.900                 | GRAY       |
| CP2-1D-2720  | 2720                  | 0.770                 | WHITE      |
| CP2-1D-3570N | 3570                  | 0.880                 | GRAY / RED |

# Isolator Details (cont'd)

## NEOPRENE ISOLATOR CROSS-REFERENCE

### RD-Style Isolators

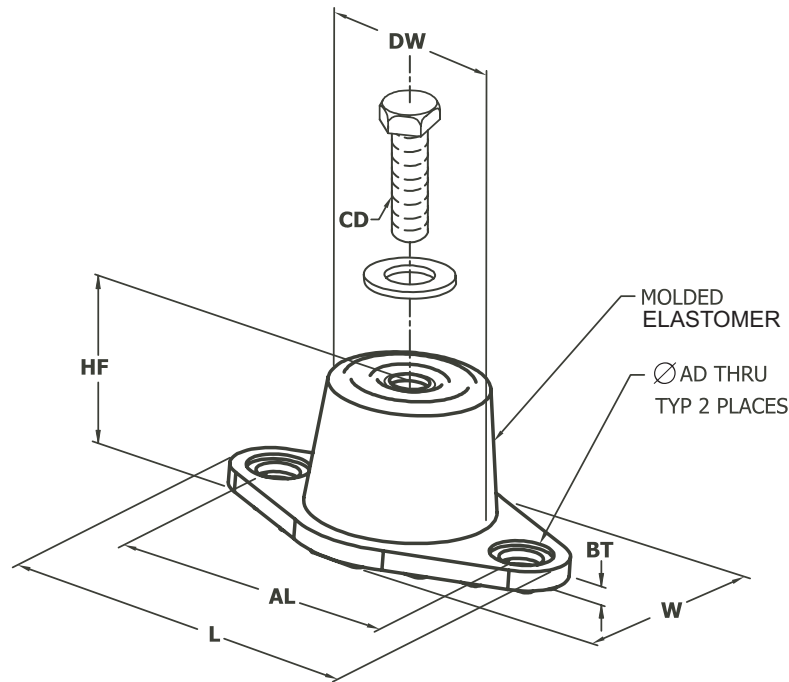

| Mount Type | Dimension Data (inches) |      |      |      |      |      |                   |      |
|------------|-------------------------|------|------|------|------|------|-------------------|------|
|            | L                       | W    | HF   | AL   | AD   | BT   | CD                | DW   |
| RD1-WR     | 3.13                    | 1.75 | 1.25 | 2.38 | 0.34 | 0.19 | 5/16-18 UNC X 3/4 | 1.25 |
| RD2-WR     | 3.88                    | 2.38 | 1.75 | 3.00 | 0.34 | 0.22 | 3/8-16 UNC X 1    | 1.75 |
| RD3-WR     | 5.50                    | 3.38 | 2.88 | 4.13 | 0.56 | 0.25 | 1/2-13 UNC X 1    | 2.50 |
| RD4-WR     | 6.25                    | 4.63 | 2.75 | 5.00 | 0.56 | 0.38 | 1/2-13 UNC X 1    | 3.00 |

| MODEL NUMBER      | RATED CAPACITY [LBS] | RATED DEFLECTION [IN] | DURO (± 5) |
|-------------------|----------------------|-----------------------|------------|
| RD2-Light Blue-WR | 35                   | 0.4                   | 30         |
| RD2-Brown-WR      | 45                   | 0.4                   | 40         |
| RD2-Brick Red-WR  | 70                   | 0.4                   | 50         |
| RD 2-Lime-WR      | 120                  | 0.4                   | 60         |

| MODEL NUMBER      | RATED CAPACITY [LBS] | RATED DEFLECTION [IN] | DURO (± 5) |
|-------------------|----------------------|-----------------------|------------|
| RD2-Light Blue-WR | 135                  | 0.5                   | 30         |
| RD2-Brown-WR      | 170                  | 0.5                   | 40         |
| RD2-Brick Red-WR  | 240                  | 0.5                   | 50         |
| RD 2-Lime-WR      | 380                  | 0.5                   | 60         |
| RD2 Charcoal-WR   | 550                  | 0.5                   | 70         |

| MODEL NUMBER     | RATED CAPACITY [LBS] | RATED DEFLECTION [IN] | DURO (± 5) |
|------------------|----------------------|-----------------------|------------|
| RD3-Brown-WR     | 250                  | 0.5                   | 40         |
| RD3-Brick Red-WR | 525                  | 0.5                   | 50         |
| RD3-Lime-WR      | 750                  | 0.5                   | 60         |
| RD3-Charcoal-WR  | 1100                 | 0.5                   | 70         |

| MODEL NUMBER     | RATED CAPACITY [LBS] | RATED DEFLECTION [IN] | DURO (± 5) |
|------------------|----------------------|-----------------------|------------|
| RD4-Brown-WR     | 1500                 | 0.5                   | 40         |
| RD4-Brick Red-WR | 2250                 | 0.5                   | 50         |
| RD4-Lime-WR      | 3000                 | 0.5                   | 60         |
| RD4-Charcoal-WR  | 4000                 | 0.5                   | 70         |



|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|

# Electrical Notes

---

## NOTES:

1. Minimum Circuit Ampacity (MCA) is based on 125% of the rated load amps for the largest motor plus 100% of the rated load amps for all other loads included in the circuit, per N.E.C. Article 430-24. If the optional Factory Mounted Control Transformer is provided, add the following MCA values to the electrical tables for the system providing power to the transformer: -17, add 2.5 amps; -28, add 2.3 amps; -40, add 1.5 amps, -46, add 1.3 amps; -58, add 1 amps.
2. The minimum recommended disconnect switch is based on 115% of the rated load amps for all loads included in the circuit, per N.E.C. Article 440.
3. Minimum fuse size is based upon 150% of the rated load amps for the largest motor plus 100% of the rated load amps for all other loads included in the circuit to avoid nuisance trips at start-up due to lock rotor amps. It is not recommended in applications where brown outs, frequent starting and stopping of the unit, and/or operation at ambient temperatures in excess of 95°F (35°C) is anticipated.
4. Maximum fuse size is based upon 225% of the rated load amps for the largest motor plus 100% of the rated load amps for all other loads included in the circuit, per N.E.C. Article 440-22.
5. Circuit breakers must be UL listed and CSA certified and maximum size is based on 225% of the rated load amps for the largest motor plus 100% of the rated load amps for all other loads included in the circuit. Otherwise, HACR-type circuit breakers must be used. Maximum HACR circuit breaker rating is based on 225% of the rated load amps for the largest motor plus 100% of the rated load amps for all other loads included in the circuit.
6. The "INCOMING WIRE RANGE" is the minimum and maximum wire size that can be accommodated by the unit wiring lugs. The (2) preceding the wire range indicates the number of termination points available per phase of the wire range specified. Actual wire size and number of wires per phase must be determined based on the National Electrical Code, **using copper connectors only**. Field wiring must also comply with local codes.
7. A ground lug is provided for each compressor system to accommodate a field grounding conductor per N.E.C. Table 250-95. A control circuit grounding lug is also supplied.
8. The supplied disconnect is a "Disconnecting Means" as defined in the N.E.C. 100, and is intended for isolating the unit for the available power supply to perform maintenance and troubleshooting. This disconnect is not intended to be a Load Break Device.
9. Field Wiring by others which complies to the National Electrical Code & Local Codes.

## LEGEND

|                  |                                                    |
|------------------|----------------------------------------------------|
| ACR-LINE         | ACROSS THE LINE START                              |
| C.B.             | CIRCUIT BREAKER                                    |
| D.E.             | DUAL ELEMENT FUSE                                  |
| DISC SW          | DISCONNECT SWITCH                                  |
| FACT MOUNT CB    | FACTORY MOUNTED CIRCUIT BREAKER                    |
| FLA              | FULL LOAD AMPS                                     |
| HZ               | HERTZ                                              |
| MAX              | MAXIMUM                                            |
| MCA              | MINIMUM CIRCUIT AMPACITY                           |
| MIN              | MINIMUM                                            |
| MIN NF           | MINIMUM NON FUSED                                  |
| RLA              | RATED LOAD AMPS                                    |
| S.P. WIRE        | SINGLE POINT WIRING                                |
| UNIT MTD SERV SW | UNIT MOUNTED SERVICE (NON-FUSED DISCONNECT SWITCH) |
| LRA              | LOCKED ROTOR AMPS                                  |

## VOLTAGE CODE

|                |
|----------------|
| -17 = 200-3-60 |
| -28 = 230-3-60 |
| -40 = 380-3-60 |
| -46 = 460-3-60 |
| -58 = 575-3-60 |

INTENTIONALLY LEFT BLANK

# Electrical Data w/o Pumps

| CHILLER<br>MODEL | Volt-<br>age | MCA | MIN<br>N/F<br>DS | MIN<br>DUAL<br>ELEM<br>FUSE | MAX<br>DUAL<br>ELEM<br>FUSE<br>MAX<br>CB | SYSTEM # 1 |      |         |      |         |      |     |     | SYSTEM # 2 |         |      |         |      |         |     |     |     |     |
|------------------|--------------|-----|------------------|-----------------------------|------------------------------------------|------------|------|---------|------|---------|------|-----|-----|------------|---------|------|---------|------|---------|-----|-----|-----|-----|
|                  |              |     |                  |                             |                                          | COMPR 1    |      | COMPR 2 |      | COMPR 3 |      | FAN |     |            | COMPR 1 |      | COMPR 2 |      | COMPR 3 |     | FAN |     |     |
|                  |              |     |                  |                             |                                          | RLA        | LRA  | RLA     | LRA  | RLA     | LRA  | QTY | FLA | LRA        | RLA     | LRA  | RLA     | LRA  | RLA     | LRA | QTY | FLA | LRA |
| 0070             | 200          | 351 | 400              | 400                         | 400                                      | 51         | 300  | 51      | 300  | 51      | 300  | 2   | 7.6 | 31         | 51      | 300  | 51      | 300  | 51      | 300 | 2   | 7.6 | 31  |
|                  | 230          | 350 | 400              | 400                         | 400                                      | 51         | 300  | 51      | 300  | 51      | 300  | 2   | 7.4 | 37         | 51      | 300  | 51      | 300  | 51      | 300 | 2   | 7.4 | 37  |
|                  | 380          | 186 | 250              | 200                         | 200                                      | 27         | 139  | 27      | 139  | 27      | 139  | 2   | 4.5 | 22         | 27      | 139  | 27      | 139  | 27      | 139 | 2   | 4.5 | 22  |
|                  | 460          | 160 | 200              | 175                         | 175                                      | 23         | 150  | 23      | 150  | 23      | 150  | 2   | 4.0 | 19         | 23      | 150  | 23      | 150  | 23      | 150 | 2   | 4.0 | 19  |
|                  | 575          | 136 | 200              | 150                         | 150                                      | 20         | 109  | 20      | 109  | 20      | 109  | 2   | 2.9 | 15         | 20      | 109  | 20      | 109  | 20      | 109 | 2   | 2.9 | 15  |
| 0080             | 200          | 366 | 600              | 400                         | 400                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.6 | 31         | 51      | 300  | 51      | 300  | 51      | 300 | 2   | 7.6 | 31  |
|                  | 230          | 365 | 600              | 400                         | 400                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.4 | 37         | 51      | 300  | 51      | 300  | 51      | 300 | 2   | 7.4 | 37  |
|                  | 380          | 216 | 250              | 225                         | 250                                      | 36         | 239  | 36      | 239  | 36      | 239  | 2   | 4.5 | 22         | 27      | 139  | 27      | 139  | 27      | 139 | 2   | 4.5 | 22  |
|                  | 460          | 173 | 200              | 200                         | 200                                      | 27         | 187  | 27      | 187  | 27      | 187  | 2   | 4.0 | 19         | 23      | 150  | 23      | 150  | 23      | 150 | 2   | 4.0 | 19  |
|                  | 575          | 148 | 200              | 175                         | 175                                      | 24         | 148  | 24      | 148  | 24      | 148  | 2   | 2.9 | 15         | 20      | 109  | 20      | 109  | 20      | 109 | 2   | 2.9 | 15  |
| 0090             | 200          | 391 | 600              | 450                         | 500                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.6 | 31         | 110     | 599  | 56      | 425  |         |     | 2   | 7.6 | 31  |
|                  | 230          | 390 | 600              | 450                         | 450                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.4 | 37         | 110     | 599  | 56      | 425  |         |     | 2   | 7.4 | 37  |
|                  | 380          | 249 | 400              | 300                         | 300                                      | 36         | 239  | 36      | 239  | 36      | 239  | 2   | 4.5 | 22         | 69      | 358  | 36      | 239  |         |     | 2   | 4.5 | 22  |
|                  | 460          | 192 | 250              | 225                         | 225                                      | 27         | 187  | 27      | 187  | 27      | 187  | 2   | 4.0 | 19         | 55      | 310  | 27      | 187  |         |     | 2   | 4.0 | 19  |
|                  | 575          | 168 | 200              | 200                         | 200                                      | 24         | 148  | 24      | 148  | 24      | 148  | 2   | 2.9 | 15         | 49      | 239  | 24      | 148  |         |     | 2   | 2.9 | 15  |
| 0091             | 200          | 404 | 600              | 450                         | 500                                      | 110        | 599  | 56      | 425  |         |      | 3   | 7.6 | 31         | 110     | 599  | 56      | 425  |         |     | 3   | 7.6 | 31  |
|                  | 230          | 403 | 600              | 450                         | 500                                      | 110        | 358  | 56      | 425  |         |      | 3   | 7.4 | 37         | 110     | 599  | 56      | 425  |         |     | 3   | 7.4 | 37  |
|                  | 380          | 255 | 400              | 300                         | 300                                      | 69         | 310  | 36      | 239  |         |      | 3   | 4.5 | 22         | 69      | 358  | 36      | 239  |         |     | 3   | 4.5 | 22  |
|                  | 460          | 200 | 250              | 225                         | 250                                      | 55         | 239  | 27      | 187  |         |      | 3   | 4.0 | 19         | 55      | 310  | 27      | 187  |         |     | 3   | 4.0 | 19  |
|                  | 575          | 176 | 200              | 200                         | 225                                      | 49         | 310  | 24      | 148  |         |      | 3   | 2.9 | 15         | 49      | 239  | 24      | 148  |         |     | 3   | 2.9 | 15  |
| 0101             | 200          | 460 | 600              | 500                         | 500                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.6 | 31         | 110     | 599  | 110     | 599  |         |     | 4   | 7.6 | 31  |
|                  | 230          | 458 | 600              | 500                         | 500                                      | 56         | 425  | 56      | 425  | 56      | 425  | 2   | 7.4 | 37         | 110     | 599  | 110     | 599  |         |     | 4   | 7.4 | 37  |
|                  | 380          | 291 | 400              | 350                         | 350                                      | 36         | 239  | 36      | 239  | 36      | 239  | 2   | 4.5 | 22         | 69      | 358  | 69      | 358  |         |     | 4   | 4.5 | 22  |
|                  | 460          | 227 | 250              | 250                         | 250                                      | 27         | 187  | 27      | 187  | 27      | 187  | 2   | 4.0 | 19         | 55      | 310  | 55      | 310  |         |     | 4   | 4.0 | 19  |
|                  | 575          | 200 | 250              | 225                         | 225                                      | 24         | 148  | 24      | 148  | 24      | 148  | 2   | 2.9 | 15         | 49      | 239  | 49      | 239  |         |     | 4   | 2.9 | 15  |
| 0115<br>0120     | 200          | 511 | 600              | 600                         | 600                                      | 110        | 599  | 110     | 599  |         |      | 3   | 7.6 | 31         | 110     | 599  | 110     | 599  |         |     | 3   | 7.6 | 31  |
|                  | 230          | 510 | 600              | 600                         | 600                                      | 110        | 599  | 110     | 599  |         |      | 3   | 7.4 | 37         | 110     | 599  | 110     | 599  |         |     | 3   | 7.4 | 37  |
|                  | 380          | 321 | 400              | 350                         | 350                                      | 69         | 358  | 69      | 358  |         |      | 3   | 4.5 | 22         | 69      | 358  | 69      | 358  |         |     | 3   | 4.5 | 22  |
|                  | 460          | 255 | 400              | 300                         | 300                                      | 55         | 310  | 55      | 310  |         |      | 3   | 4.0 | 19         | 55      | 310  | 55      | 310  |         |     | 3   | 4.0 | 19  |
|                  | 575          | 227 | 250              | 250                         | 250                                      | 49         | 239  | 49      | 239  |         |      | 3   | 2.9 | 15         | 49      | 239  | 49      | 239  |         |     | 3   | 2.9 | 15  |
| 0135             | 200          | 582 | 800              | 700                         | 700                                      | 110        | 599  | 110     | 599  | 110     | 599  | 4   | 7.6 | 31         | 110     | 599  | 56      | 425  |         |     | 4   | 7.6 | 31  |
|                  | 230          | 581 | 800              | 700                         | 700                                      | 110        | 599  | 110     | 599  | 110     | 599  | 4   | 7.4 | 37         | 110     | 599  | 56      | 425  |         |     | 4   | 7.4 | 37  |
|                  | 380          | 366 | 600              | 400                         | 400                                      | 69         | 358  | 69      | 358  | 69      | 358  | 4   | 4.5 | 22         | 69      | 358  | 36      | 239  |         |     | 4   | 4.5 | 22  |
|                  | 460          | 291 | 400              | 350                         | 350                                      | 55         | 310  | 55      | 310  | 55      | 310  | 4   | 4.0 | 19         | 55      | 310  | 27      | 187  |         |     | 4   | 4.0 | 19  |
|                  | 575          | 257 | 400              | 300                         | 300                                      | 49         | 239  | 49      | 239  | 49      | 239  | 4   | 2.9 | 15         | 49      | 239  | 24      | 148  |         |     | 4   | 2.9 | 15  |
| 0150<br>0155     | 200          | 636 | 800              | 700                         | 700                                      | 110        | 599  | 110     | 599  | 110     | 599  | 4   | 7.6 | 31         | 110     | 599  | 110     | 599  |         |     | 4   | 7.6 | 31  |
|                  | 230          | 635 | 800              | 700                         | 700                                      | 110        | 599  | 110     | 599  | 110     | 599  | 4   | 7.4 | 37         | 110     | 599  | 110     | 599  |         |     | 4   | 7.4 | 37  |
|                  | 380          | 399 | 600              | 450                         | 450                                      | 69         | 358  | 69      | 358  | 69      | 358  | 4   | 4.5 | 22         | 69      | 358  | 69      | 358  |         |     | 4   | 4.5 | 22  |
|                  | 460          | 318 | 400              | 350                         | 350                                      | 55         | 310  | 55      | 310  | 55      | 310  | 4   | 4.0 | 19         | 55      | 310  | 55      | 310  |         |     | 4   | 4.0 | 19  |
|                  | 575          | 283 | 3800             | 300                         | 300                                      | 49         | 2309 | 49      | 2309 | 49      | 2309 | 4   | 2.9 | 15         | 49      | 2309 | 49      | 2309 |         |     | 4   | 2.9 | 15  |

| Lug Sizing        |         |                             |                 |         |                             |                     |
|-------------------|---------|-----------------------------|-----------------|---------|-----------------------------|---------------------|
| Non-Fuse Disc Sw. |         |                             | Circuit Breaker |         |                             | Terminal Block      |
| Rating            | Size    | Lug                         | Rating          | Size    | Lug                         | Lug                 |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 400             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 400             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 200             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 200               | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | 175             | S3-175  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 200               | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | 150             | S3-150  | S3-S4: 2AWG - 4/0           | (2) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 400             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 400             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 250             | S4-250  | S4: 6AWG - 350kcmil         | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 200             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 200               | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | 175             | S3-175  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 500             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 450             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 300             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 225             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 200             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 500             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 500             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 300             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 250             | S4-250  | S4: 6AWG - 350kcmil         | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 225             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 500             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 500             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 350             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 250             | S4-250  | S4: 6AWG - 350kcmil         | (2) 4AWG - 500kcmil |
| 250               | S4-250  | S4: 6AWG - 350kcmil         | 225             | S3-225  | S3-S4-S5: 4AWG - 300kcmil   | (2) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 600             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 600             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 350             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 300             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 250             | S4-250  | S4: 6AWG - 350kcmil         | (2) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 700             | S6-800  | S6: (3) 2/0 - 400kcmil      | (4) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 700             | S6-800  | S6: (3) 2/0 - 400kcmil      | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 400             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 350             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 300             | S5-400  | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 700             | S6-800  | S6: (3) 2/0 - 400kcmil      | (4) 4AWG - 500kcmil |
| 800               | S6-800  | S6: (3) 2/0 - 400kcmil      | 700             | S6-800  | S6: (3) 2/0 - 400kcmil      | (4) 4AWG - 500kcmil |
| 600               | S6-600  | S6: (2) 250kcmil - 500kcmil | 450             | S6-600  | S6: (2) 250kcmil - 500kcmil | (4) 4AWG - 500kcmil |
| 400               | S5-400  | S5: (2) 3/0 - 250kcmil      | 350             | S5-400  | S5: (2) 3/0 - 250kcmil      | (4) 4AWG - 500kcmil |
| 3800              | S5-3800 | S5: (2) 3/0 - 250kcmil      | 300             | S5-3800 | S5: (2) 3/0 - 250kcmil      | (2) 4AWG - 500kcmil |

# Electrical Data w/ Pumps

| CHILLER MODEL | Pump Model | Voltage | Pump FLA | MCA | MIN N/F DS | MIN DUAL ELEM FUSE | MAX DUAL ELEM FUSE MAX CB | SYSTEM # 1 |     |         |     |         |     |     |     |     |
|---------------|------------|---------|----------|-----|------------|--------------------|---------------------------|------------|-----|---------|-----|---------|-----|-----|-----|-----|
|               |            |         |          |     |            |                    |                           | COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |
|               |            |         |          |     |            |                    |                           | RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA |
| 0070          | A, K       | 200     | 15.4     | 366 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.6 | 31  |
|               |            | 230     | 13.9     | 364 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.4 | 37  |
|               |            | 380     | 8.1      | 194 | 250        | 225                | 225                       | 27         | 139 | 27      | 139 | 27      | 139 | 2   | 4.5 | 22  |
|               |            | 460     | 6.95     | 167 | 200        | 175                | 175                       | 23         | 150 | 23      | 150 | 23      | 150 | 2   | 4.0 | 19  |
|               |            | 575     | 5.56     | 142 | 200        | 150                | 150                       | 20         | 109 | 20      | 109 | 20      | 109 | 2   | 2.9 | 15  |
| 0070          | B          | 200     | 21.4     | 372 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.6 | 31  |
|               |            | 230     | 20.4     | 371 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.4 | 37  |
|               |            | 380     | 12       | 198 | 250        | 225                | 225                       | 27         | 139 | 27      | 139 | 27      | 139 | 2   | 4.5 | 22  |
|               |            | 460     | 10.2     | 171 | 200        | 200                | 200                       | 23         | 150 | 23      | 150 | 23      | 150 | 2   | 4.0 | 19  |
|               |            | 575     | 8.2      | 144 | 200        | 150                | 150                       | 20         | 109 | 20      | 109 | 20      | 109 | 2   | 2.9 | 15  |
| 0070          | C          | 200     | 32.2     | 383 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.6 | 31  |
|               |            | 230     | 28.4     | 379 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.4 | 37  |
|               |            | 380     | 15.4     | 202 | 250        | 225                | 225                       | 27         | 139 | 27      | 139 | 27      | 139 | 2   | 4.5 | 22  |
|               |            | 460     | 14.2     | 175 | 200        | 200                | 200                       | 23         | 150 | 23      | 150 | 23      | 150 | 2   | 4.0 | 19  |
|               |            | 575     | 11.4     | 147 | 200        | 175                | 150                       | 20         | 109 | 20      | 109 | 20      | 109 | 2   | 2.9 | 15  |
| 0070          | D, M, N    | 200     | 41.7     | 393 | 600        | 450                | 450                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.6 | 31  |
|               |            | 230     | 36.3     | 387 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.4 | 37  |
|               |            | 380     | 22.03    | 208 | 250        | 225                | 225                       | 27         | 139 | 27      | 139 | 27      | 139 | 2   | 4.5 | 22  |
|               |            | 460     | 18.2     | 179 | 200        | 200                | 200                       | 23         | 150 | 23      | 150 | 23      | 150 | 2   | 4.0 | 19  |
|               |            | 575     | 14.5     | 150 | 200        | 175                | 175                       | 20         | 109 | 20      | 109 | 20      | 109 | 2   | 2.9 | 15  |
| 0070          | L          | 200     | 27.1     | 378 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.6 | 31  |
|               |            | 230     | 24.5     | 375 | 600        | 400                | 400                       | 51         | 300 | 51      | 300 | 51      | 300 | 2   | 7.4 | 37  |
|               |            | 380     | 14.8     | 201 | 250        | 225                | 225                       | 27         | 139 | 27      | 139 | 27      | 139 | 2   | 4.5 | 22  |
|               |            | 460     | 12.3     | 173 | 200        | 200                | 200                       | 23         | 150 | 23      | 150 | 23      | 150 | 2   | 4.0 | 19  |
|               |            | 575     | 9.84     | 146 | 200        | 175                | 175                       | 20         | 109 | 20      | 109 | 20      | 109 | 2   | 2.9 | 15  |
| 0080          | A, K       | 200     | 15.4     | 381 | 600        | 400                | 400                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 13.9     | 379 | 600        | 400                | 400                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 8.1      | 224 | 250        | 250                | 250                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 6.95     | 180 | 200        | 200                | 200                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 5.56     | 154 | 200        | 175                | 175                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0080          | B          | 200     | 21.4     | 387 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 20.4     | 385 | 600        | 400                | 400                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 12       | 228 | 400        | 250                | 250                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 10.2     | 183 | 250        | 200                | 200                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 8.2      | 157 | 200        | 175                | 175                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0080          | C          | 200     | 32.2     | 398 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 28.4     | 393 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 15.4     | 231 | 400        | 250                | 250                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 14.2     | 187 | 250        | 200                | 200                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 11.4     | 160 | 200        | 175                | 175                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0080          | D, M, N    | 200     | 41.7     | 407 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 36.3     | 401 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 22.03    | 238 | 400        | 250                | 250                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 18.2     | 191 | 250        | 200                | 200                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 14.5     | 163 | 200        | 175                | 175                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0080          | L          | 200     | 27.1     | 393 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 24.5     | 389 | 600        | 450                | 450                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 14.8     | 231 | 400        | 250                | 250                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 12.3     | 185 | 250        | 200                | 200                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 9.84     | 158 | 200        | 175                | 175                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |



# Electrical Data w/ Pumps – continued

| CHILLER MODEL | Pump Model | Voltage | Pump FLA | MCA | MIN N/F DS | MIN DUAL ELEM FUSE | MAX DUAL ELEM FUSE MAX CB | SYSTEM # 1 |     |         |     |         |     |     |     |     |
|---------------|------------|---------|----------|-----|------------|--------------------|---------------------------|------------|-----|---------|-----|---------|-----|-----|-----|-----|
|               |            |         |          |     |            |                    |                           | COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |
|               |            |         |          |     |            |                    |                           | RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA |
| 0090          | A, K       | 200     | 15.4     | 406 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 13.9     | 404 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 8.1      | 257 | 400        | 300                | 300                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 7        | 199 | 250        | 225                | 250                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 5.6      | 174 | 200        | 200                | 200                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0090          | B          | 200     | 21.4     | 412 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 20.4     | 410 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 12       | 261 | 400        | 300                | 300                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 10.2     | 202 | 250        | 225                | 250                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 8.2      | 176 | 200        | 200                | 225                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0090          | D, M, N    | 200     | 41.7     | 432 | 600        | 500                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 36.3     | 426 | 600        | 500                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 22       | 271 | 400        | 300                | 300                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 18.2     | 210 | 250        | 225                | 250                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 14.5     | 183 | 200        | 200                | 225                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0090          | E          | 200     | 54.7     | 445 | 600        | 500                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 49.5     | 439 | 600        | 500                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 29.1     | 278 | 400        | 300                | 300                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 24.8     | 217 | 250        | 250                | 250                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 19.8     | 188 | 250        | 225                | 225                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0090          | L          | 200     | 27.1     | 418 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|               |            | 230     | 24.5     | 414 | 600        | 450                | 500                       | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|               |            | 380     | 14.8     | 263 | 400        | 300                | 300                       | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|               |            | 460     | 12.3     | 204 | 250        | 225                | 250                       | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|               |            | 575     | 9.8      | 178 | 200        | 200                | 225                       | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0091          | A, K       | 200     | 15.4     | 419 | 600        | 450                | 500                       | 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 13.9     | 417 | 600        | 450                | 500                       | 110        | 358 | 56      | 425 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 8.1      | 263 | 400        | 300                | 300                       | 69         | 310 | 36      | 239 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 7        | 207 | 250        | 225                | 250                       | 55         | 239 | 27      | 187 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 5.6      | 182 | 200        | 200                | 225                       | 49         | 310 | 24      | 148 |         |     | 3   | 2.9 | 15  |
| 0091          | B          | 200     | 21.4     | 425 | 600        | 500                | 500                       | 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 20.4     | 423 | 600        | 500                | 500                       | 110        | 358 | 56      | 425 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 12       | 267 | 400        | 300                | 300                       | 69         | 310 | 36      | 239 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 10.2     | 211 | 250        | 225                | 250                       | 55         | 239 | 27      | 187 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 8.2      | 184 | 200        | 200                | 225                       | 49         | 310 | 24      | 148 |         |     | 3   | 2.9 | 15  |
| 0091          | D, M, N    | 200     | 41.7     | 446 | 600        | 500                | 500                       | 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 36.3     | 439 | 600        | 500                | 500                       | 110        | 358 | 56      | 239 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 22       | 277 | 400        | 300                | 300                       | 69         | 310 | 36      | 187 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 18.2     | 219 | 250        | 250                | 250                       | 55         | 239 | 27      | 148 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 14.5     | 190 | 250        | 225                | 225                       | 49         | 310 | 24      | 425 |         |     | 3   | 2.9 | 15  |
| 0091          | E          | 200     | 54.7     | 459 | 600        | 500                | 500                       | 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 49.5     | 452 | 600        | 500                | 500                       | 110        | 358 | 56      | 425 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 29.1     | 284 | 400        | 350                | 350                       | 69         | 310 | 36      | 239 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 24.8     | 225 | 250        | 250                | 250                       | 55         | 239 | 27      | 187 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 19.8     | 196 | 250        | 225                | 225                       | 49         | 310 | 24      | 148 |         |     | 3   | 2.9 | 15  |
| 0091          | L          | 200     | 27.1     | 431 | 600        | 500                | 500                       | 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 24.5     | 427 | 600        | 500                | 500                       | 110        | 358 | 56      | 425 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 14.8     | 270 | 400        | 300                | 300                       | 69         | 310 | 36      | 239 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 12.3     | 213 | 250        | 250                | 250                       | 55         | 239 | 27      | 187 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 9.8      | 186 | 200        | 200                | 225                       | 49         | 310 | 24      | 148 |         |     | 3   | 2.9 | 15  |



| SYSTEM # 2 |     |         |     |         |     |     |     |     | Non-Fuse Disc Sw. |        |                             |
|------------|-----|---------|-----|---------|-----|-----|-----|-----|-------------------|--------|-----------------------------|
| COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |                   |        |                             |
| RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA | Rating            | Size   | Lug                         |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 2   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 2   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 2   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 2   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 2   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 2   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 2   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 2   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 2   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 2   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 2   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 2   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 2   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 2   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 2   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 2   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 3   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 3   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 3   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 3   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 55         | 310 | 27      | 187 |         |     | 3   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 24      | 148 |         |     | 3   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 56      | 425 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 36      | 239 |         |     | 3   | 4.5 | 22  | 250               | S4-250 | S4: 6AWG - 350kcmil         |

# Electrical Data w/ Pumps – continued

| CHILLER<br>MODEL | Pump<br>Model | Voltage | Pump<br>FLA | MCA | MIN<br>N/F<br>DS | MIN<br>DUAL<br>ELEM<br>FUSE | MAX<br>DUAL<br>ELEM<br>FUSE<br>MAX CB | SYSTEM # 1 |     |         |     |         |     |     |     |     |
|------------------|---------------|---------|-------------|-----|------------------|-----------------------------|---------------------------------------|------------|-----|---------|-----|---------|-----|-----|-----|-----|
|                  |               |         |             |     |                  |                             |                                       | COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |
|                  |               |         |             |     |                  |                             |                                       | RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA |
| 0101             | B, F          | 200     | 21.4        | 481 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|                  |               | 230     | 20.4        | 479 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|                  |               | 380     | 12          | 303 | 400              | 350                         | 350                                   | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|                  |               | 460     | 10.2        | 238 | 400              | 300                         | 300                                   | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|                  |               | 575     | 8.2         | 208 | 250              | 225                         | 250                                   | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0101             | D, O          | 200     | 41.7        | 501 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|                  |               | 230     | 36.3        | 495 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|                  |               | 380     | 22          | 313 | 400              | 350                         | 350                                   | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|                  |               | 460     | 18.2        | 246 | 400              | 300                         | 300                                   | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|                  |               | 575     | 14.5        | 214 | 250              | 250                         | 250                                   | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0101             | E, P          | 200     | 54.7        | 514 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|                  |               | 230     | 49.5        | 508 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|                  |               | 380     | 29.1        | 320 | 400              | 350                         | 350                                   | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|                  |               | 460     | 24.8        | 252 | 400              | 300                         | 300                                   | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|                  |               | 575     | 19.8        | 219 | 250              | 250                         | 250                                   | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0101             | K             | 200     | 15.4        | 475 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|                  |               | 230     | 13.9        | 472 | 600              | 500                         | 500                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|                  |               | 380     | 8.1         | 299 | 400              | 350                         | 350                                   | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|                  |               | 460     | 7           | 234 | 400              | 250                         | 250                                   | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|                  |               | 575     | 5.6         | 205 | 250              | 225                         | 250                                   | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0101             | L             | 200     | 27.1        | 487 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.6 | 31  |
|                  |               | 230     | 24.5        | 483 | 600              | 600                         | 600                                   | 56         | 425 | 56      | 425 | 56      | 425 | 2   | 7.4 | 37  |
|                  |               | 380     | 14.8        | 306 | 400              | 350                         | 350                                   | 36         | 239 | 36      | 239 | 36      | 239 | 2   | 4.5 | 22  |
|                  |               | 460     | 12.3        | 240 | 400              | 300                         | 300                                   | 27         | 187 | 27      | 187 | 27      | 187 | 2   | 4.0 | 19  |
|                  |               | 575     | 9.8         | 209 | 250              | 225                         | 250                                   | 24         | 148 | 24      | 148 | 24      | 148 | 2   | 2.9 | 15  |
| 0115<br>0120     | F             | 200     | 21.4        | 532 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|                  |               | 230     | 20.4        | 530 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|                  |               | 380     | 12          | 333 | 400              | 400                         | 400                                   | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|                  |               | 460     | 10.2        | 265 | 400              | 300                         | 300                                   | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|                  |               | 575     | 8.2         | 235 | 400              | 250                         | 250                                   | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |
| 0115<br>0120     | C             | 200     | 32.2        | 543 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|                  |               | 230     | 28.4        | 538 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|                  |               | 380     | 15.4        | 336 | 400              | 400                         | 400                                   | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|                  |               | 460     | 14.2        | 269 | 400              | 300                         | 300                                   | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|                  |               | 575     | 11.4        | 238 | 400              | 300                         | 300                                   | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |
| 0115<br>0120*    | D, M*, O      | 200     | 41.7        | 552 | 800              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|                  |               | 230     | 36.3        | 546 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|                  |               | 380     | 22          | 343 | 400              | 400                         | 400                                   | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|                  |               | 460     | 18.2        | 273 | 400              | 300                         | 300                                   | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|                  |               | 575     | 14.5        | 241 | 400              | 300                         | 300                                   | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |
| 0115<br>0120     | E, P          | 200     | 54.7        | 565 | 800              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|                  |               | 230     | 49.5        | 559 | 800              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|                  |               | 380     | 29.1        | 350 | 400              | 400                         | 400                                   | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|                  |               | 460     | 24.8        | 280 | 400              | 300                         | 300                                   | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|                  |               | 575     | 19.8        | 247 | 400              | 300                         | 300                                   | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |
| 0115<br>0120     | K             | 200     | 15.4        | 526 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|                  |               | 230     | 13.9        | 523 | 600              | 600                         | 600                                   | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|                  |               | 380     | 8.1         | 329 | 400              | 350                         | 350                                   | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|                  |               | 460     | 7           | 262 | 400              | 300                         | 300                                   | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|                  |               | 575     | 5.6         | 232 | 400              | 250                         | 250                                   | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |


| SYSTEM # 2 |     |         |     |         |     |     |     |     | Non-Fuse Disc Sw. |        |                             |
|------------|-----|---------|-----|---------|-----|-----|-----|-----|-------------------|--------|-----------------------------|
| COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |                   |        |                             |
| RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA | Rating            | Size   | Lug                         |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 600               | S6-600 | S6: (2) 250kcmil - 500kcmil |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 250               | S4-250 | S4: 6AWG - 350kcmil         |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400 | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800 | S6: (3) 2/0 - 400kcmil      |


# Electrical Data w/ Pumps – continued

| CHILLER MODEL | Pump Model | Voltage | Pump FLA | MCA | MIN N/F DS | MIN DUAL ELEM FUSE | MAX DUAL ELEM FUSE MAX CB | SYSTEM # 1 |     |         |     |         |     |     |     |     |
|---------------|------------|---------|----------|-----|------------|--------------------|---------------------------|------------|-----|---------|-----|---------|-----|-----|-----|-----|
|               |            |         |          |     |            |                    |                           | COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |
|               |            |         |          |     |            |                    |                           | RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA |
| 0115          | L          | 200     | 27.1     | 538 | 600        | 600                | 600                       | 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  |
|               |            | 230     | 24.5     | 534 | 600        | 600                | 600                       | 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  |
|               |            | 380     | 14.8     | 336 | 400        | 400                | 400                       | 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  |
|               |            | 460     | 12.3     | 268 | 400        | 300                | 300                       | 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  |
|               |            | 575     | 9.8      | 237 | 400        | 250                | 250                       | 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  |
| 0135          | F          | 200     | 21.4     | 604 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 20.4     | 601 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 12       | 378 | 600        | 400                | 400                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 10.2     | 301 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 8.2      | 265 | 400        | 300                | 300                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0135          | C          | 200     | 32.2     | 615 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 28.4     | 609 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 15.4     | 382 | 600        | 400                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 14.2     | 305 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 11.4     | 268 | 400        | 300                | 300                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0135          | D, M, O    | 200     | 41.7     | 624 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 36.3     | 617 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 22       | 388 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 18.2     | 309 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 14.5     | 271 | 400        | 300                | 300                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0135          | E, R       | 200     | 54.7     | 637 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 49.5     | 630 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 29.1     | 395 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 24.8     | 315 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 19.8     | 277 | 400        | 300                | 300                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0135          | K          | 200     | 15.4     | 598 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 13.9     | 595 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 8.1      | 374 | 600        | 400                | 400                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 7        | 297 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 5.6      | 262 | 400        | 300                | 300                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0150<br>0155  | G          | 200     | 32.2     | 668 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 28.4     | 663 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 15.4     | 414 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 14.2     | 332 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 11.4     | 294 | 400        | 350                | 350                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0150<br>0155  | H, L       | 200     | 27.1     | 663 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 24.5     | 659 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 14.8     | 414 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 12.3     | 330 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 9.8      | 292 | 400        | 350                | 350                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0150<br>0155  | I, M       | 200     | 41.7     | 678 | 800        | 800                | 800                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 36.3     | 671 | 800        | 700                | 700                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 22       | 421 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 18.2     | 336 | 400        | 350                | 350                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 14.5     | 297 | 400        | 350                | 350                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |
| 0150<br>0155  | J, R       | 200     | 54.7     | 691 | 800        | 800                | 800                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.6 | 31  |
|               |            | 230     | 49.5     | 684 | 800        | 800                | 800                       | 110        | 599 | 110     | 599 | 110     | 599 | 4   | 7.4 | 37  |
|               |            | 380     | 29.1     | 428 | 600        | 450                | 450                       | 69         | 358 | 69      | 358 | 69      | 358 | 4   | 4.5 | 22  |
|               |            | 460     | 24.8     | 343 | 400        | 400                | 400                       | 55         | 310 | 55      | 310 | 55      | 310 | 4   | 4.0 | 19  |
|               |            | 575     | 19.8     | 302 | 400        | 350                | 350                       | 49         | 239 | 49      | 239 | 49      | 239 | 4   | 2.9 | 15  |


| SYSTEM # 2 |     |         |     |         |     |     |     |     | Non-Fuse Disc Sw. |         |                             |
|------------|-----|---------|-----|---------|-----|-----|-----|-----|-------------------|---------|-----------------------------|
| COMPR 1    |     | COMPR 2 |     | COMPR 3 |     | FAN |     |     |                   |         |                             |
| RLA        | LRA | RLA     | LRA | RLA     | LRA | QTY | FLA | LRA | Rating            | Size    | Lug                         |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 3   | 7.4 | 37  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 69         | 358 | 69      | 358 |         |     | 3   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 3   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 3   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 36      | 239 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 27      | 187 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 24      | 148 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 36      | 239 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 27      | 187 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 24      | 148 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 36      | 239 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 27      | 187 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 24      | 148 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 36      | 239 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 27      | 187 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 24      | 148 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 56      | 425 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 36      | 239 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 27      | 187 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 24      | 148 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.6 | 31  | 800               | S6-800  | S6: (3) 2/0 - 400kcmil      |
| 110        | 599 | 110     | 599 |         |     | 4   | 7.4 | 37  | 600               | S6-600  | S6: (2) 250kcmil - 500kcmil |
| 69         | 358 | 69      | 358 |         |     | 4   | 4.5 | 22  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 55         | 310 | 55      | 310 |         |     | 4   | 4.0 | 19  | 400               | S5-400  | S5: (2) 3/0 - 250kcmil      |
| 49         | 239 | 49      | 239 |         |     | 4   | 2.9 | 15  | 1000              | S7-1000 | S7-1200: (4) 4/0 - 500kcmil |

# Wiring Diagram

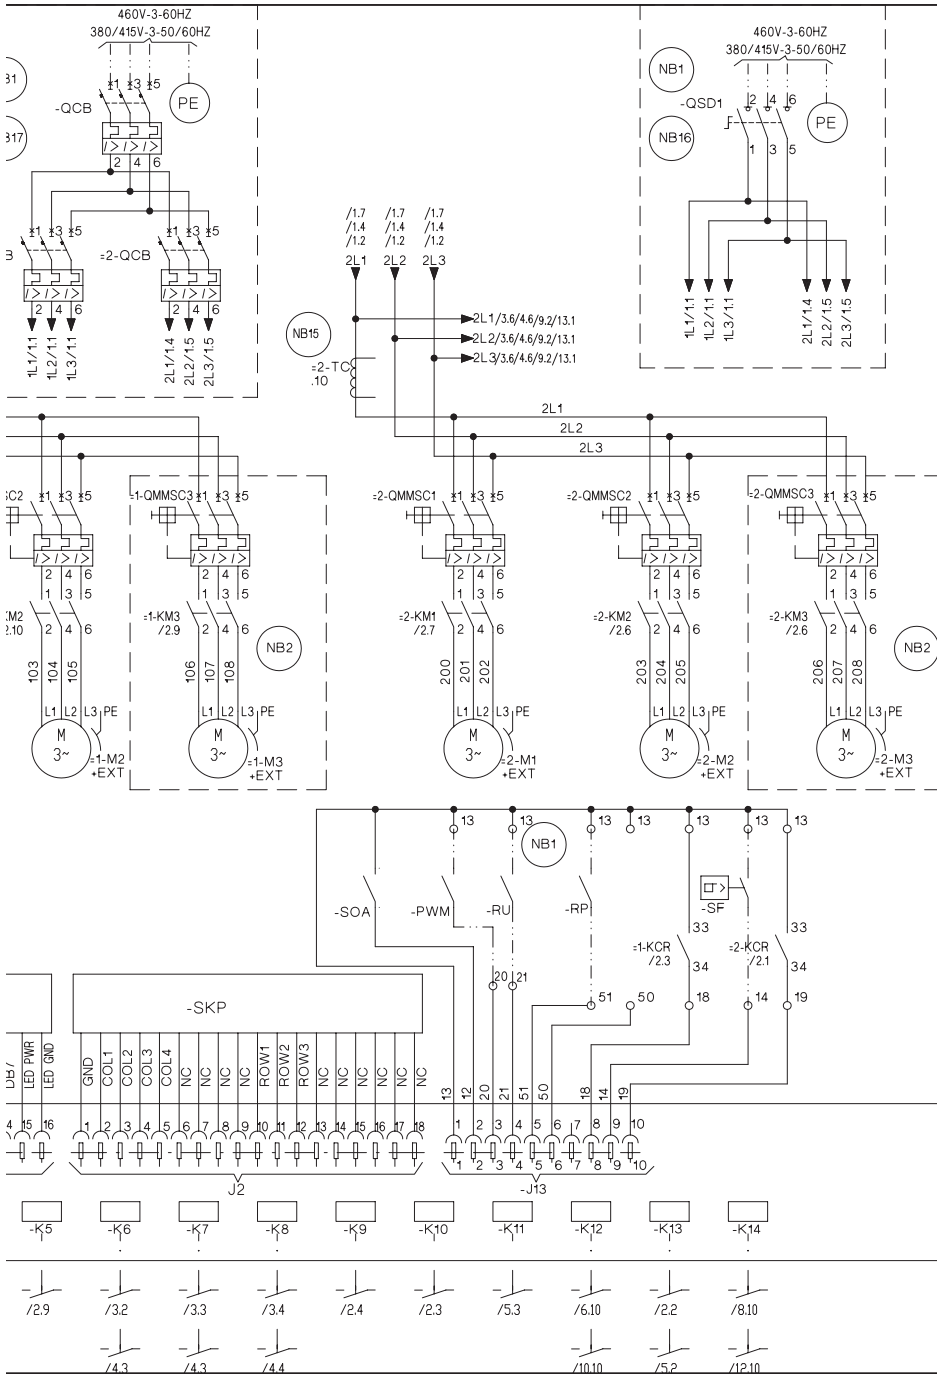


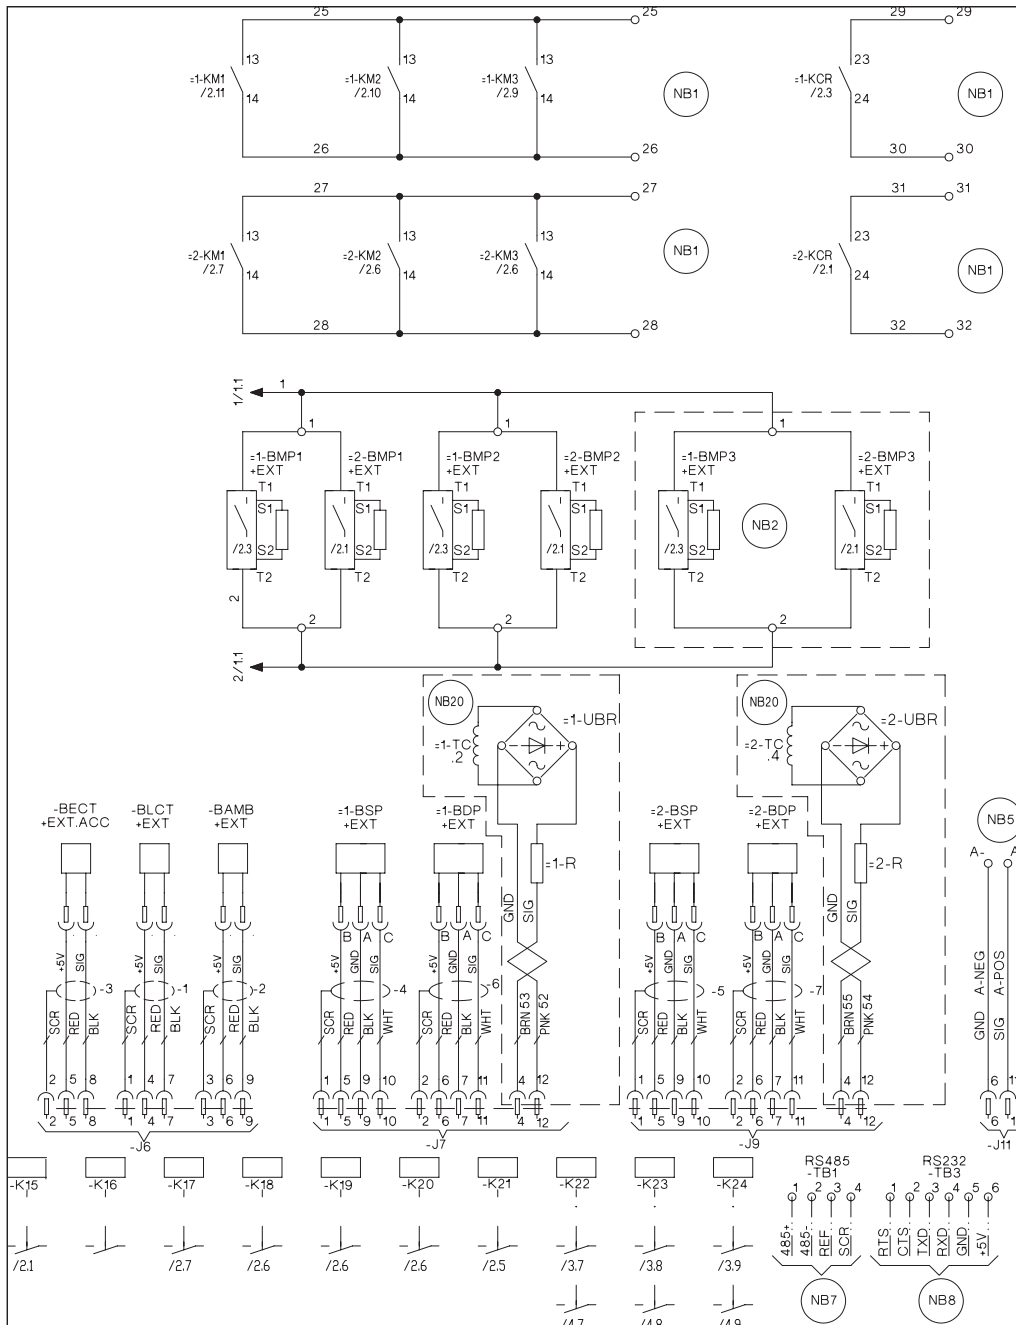

# Elementary Wiring

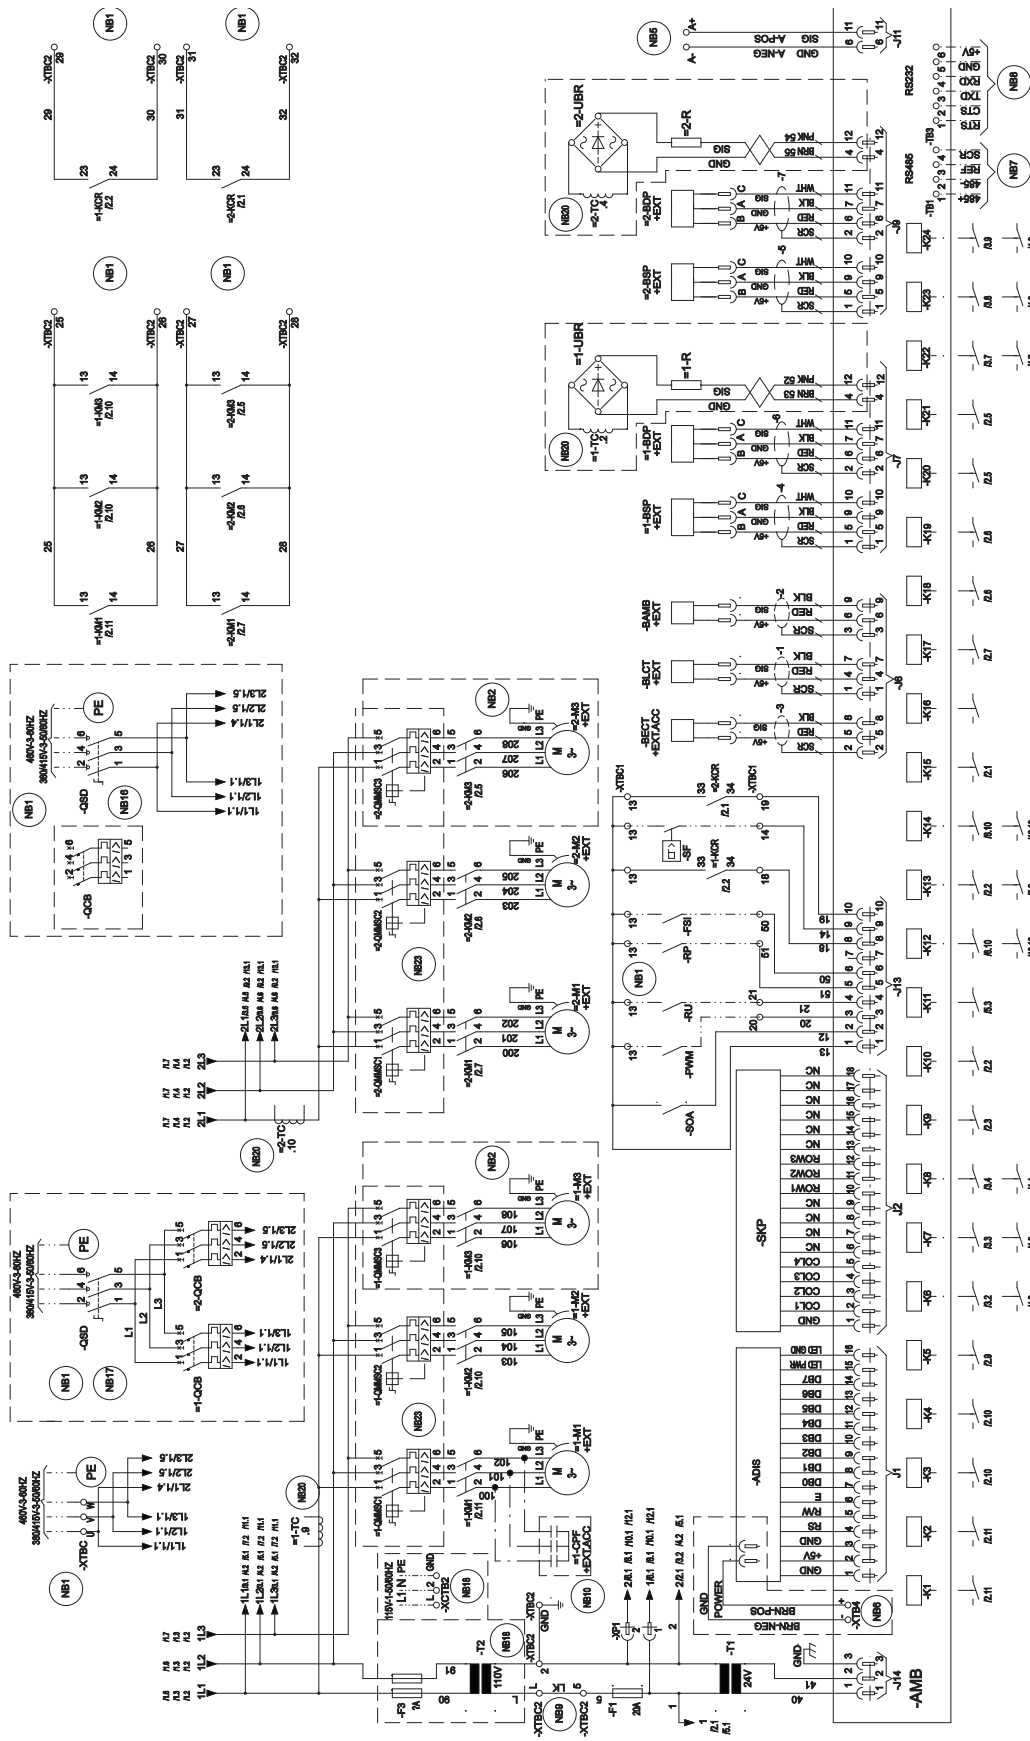




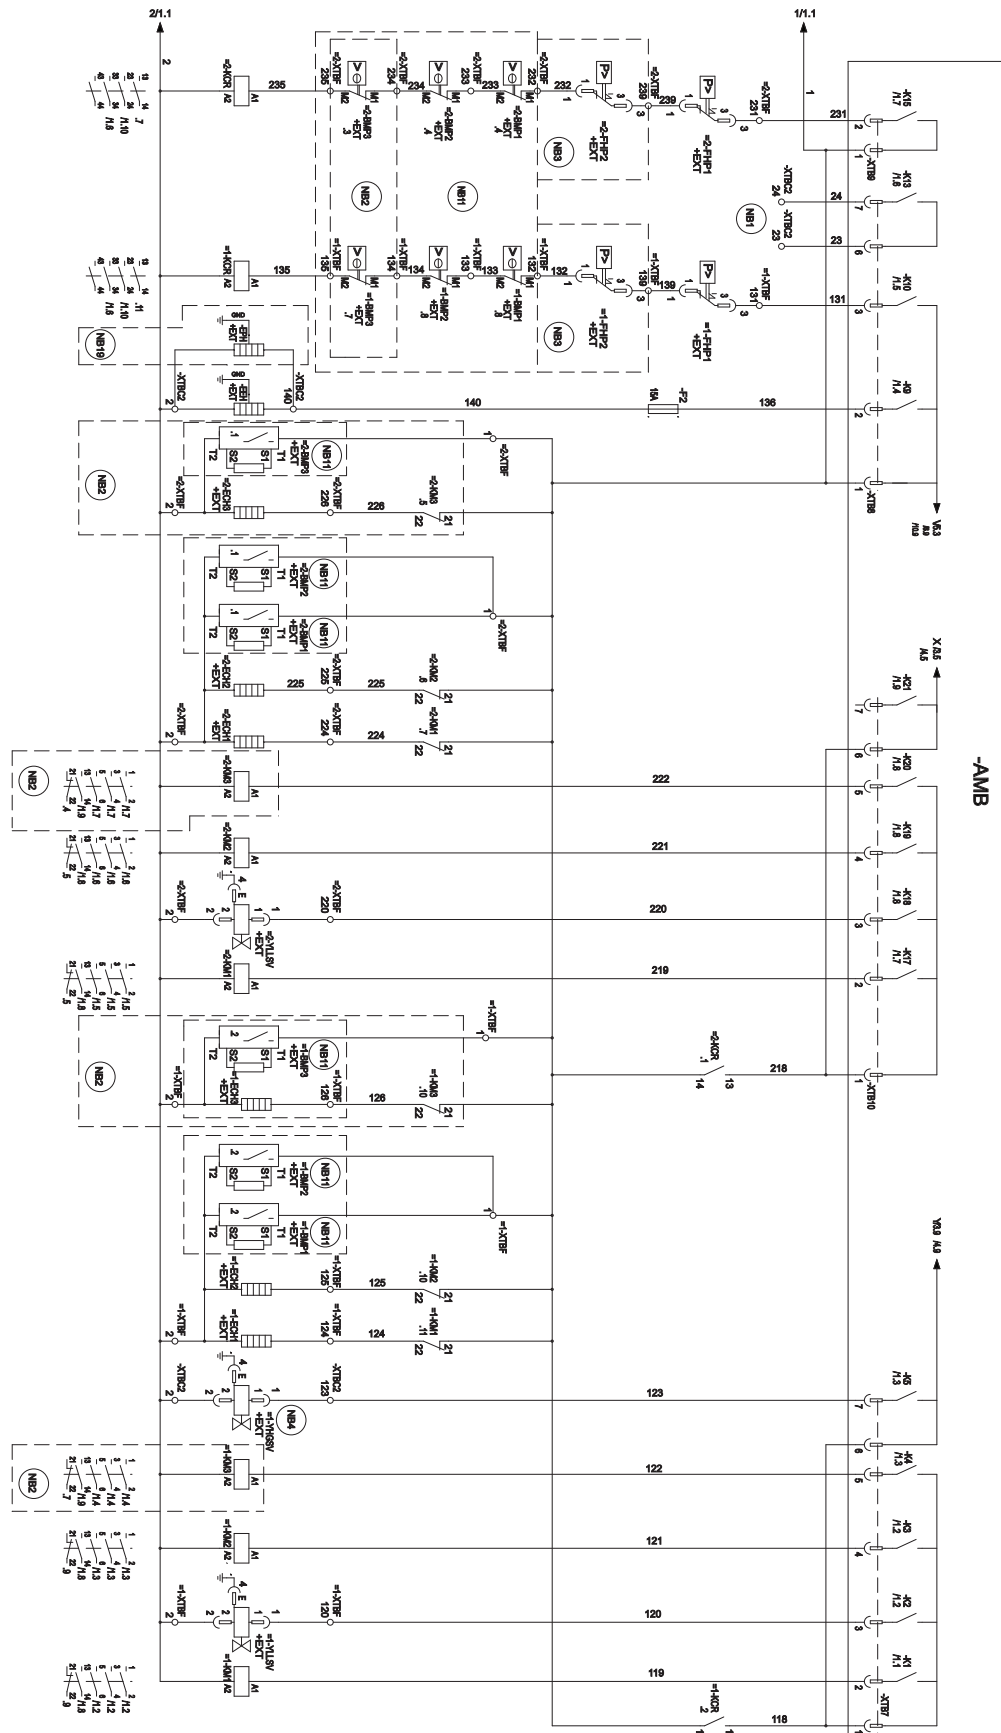


## 56




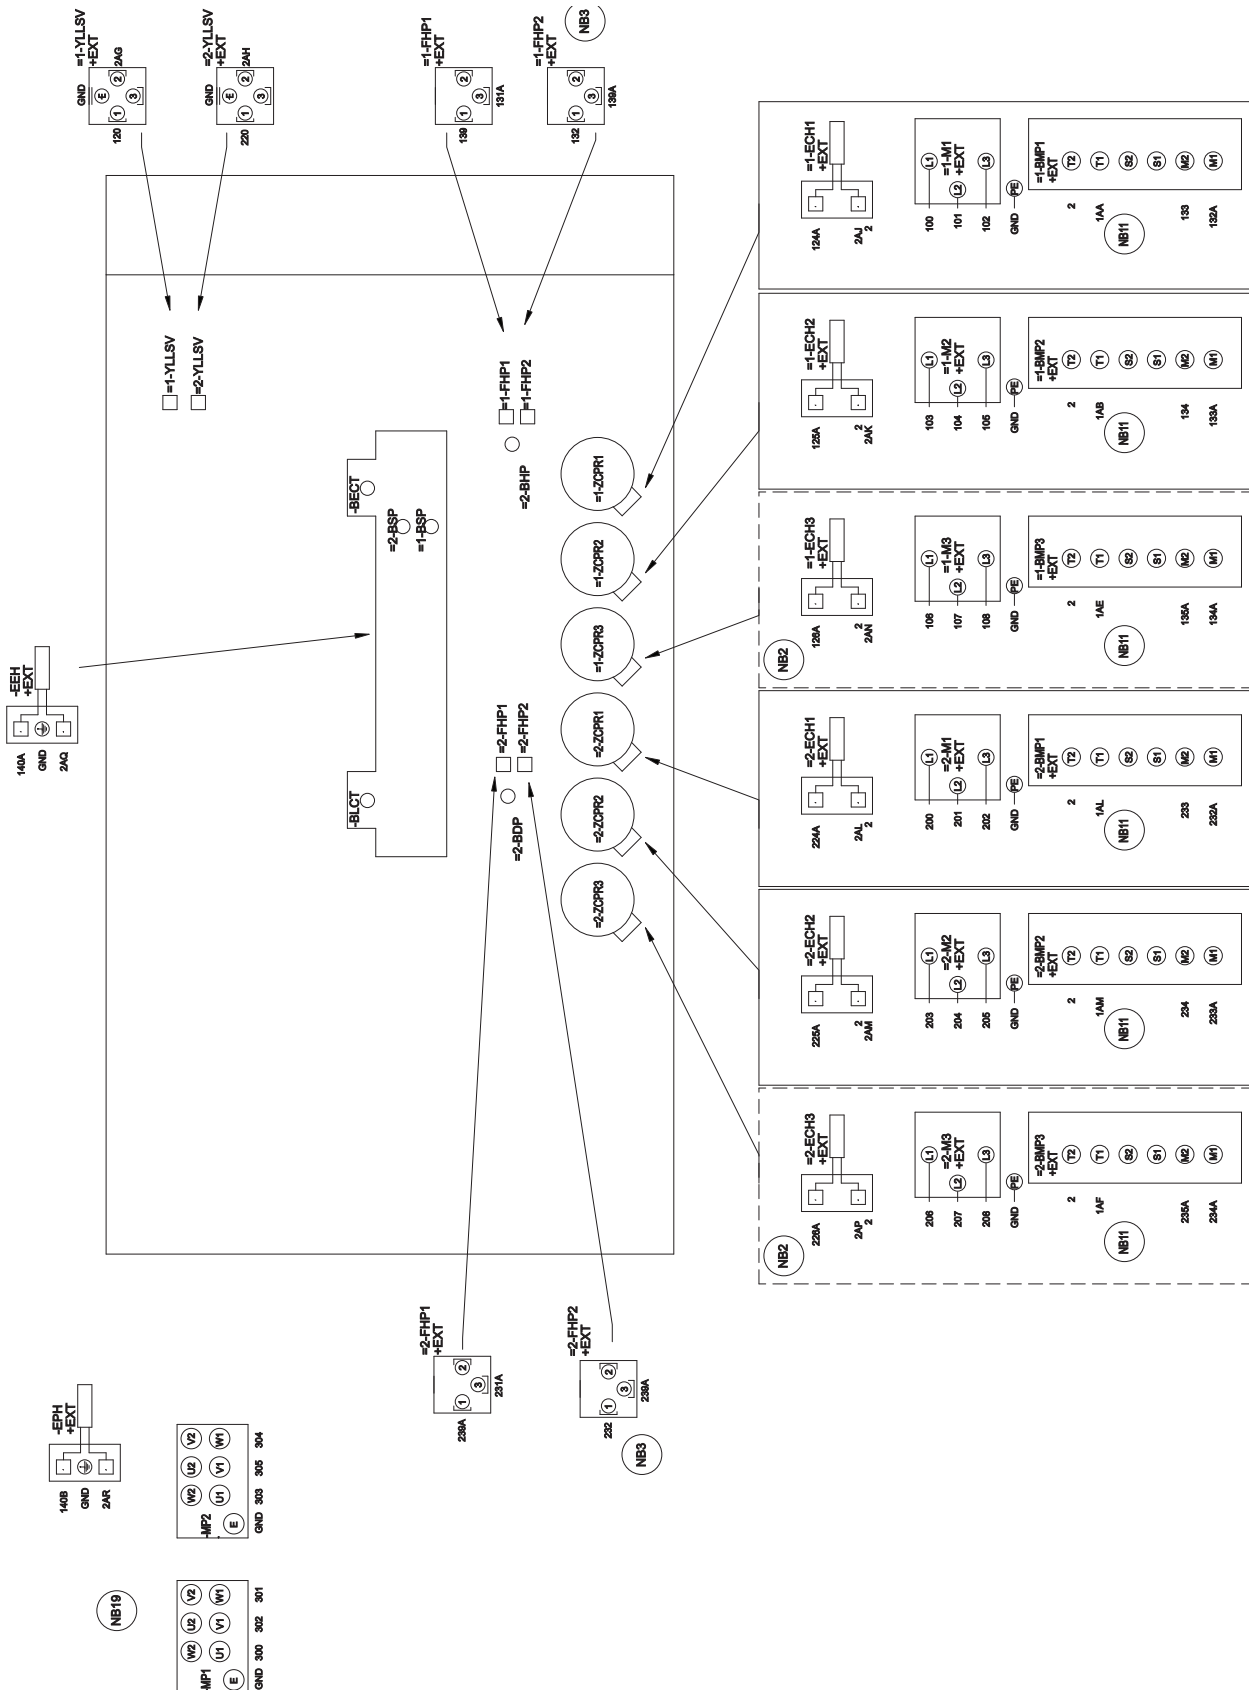




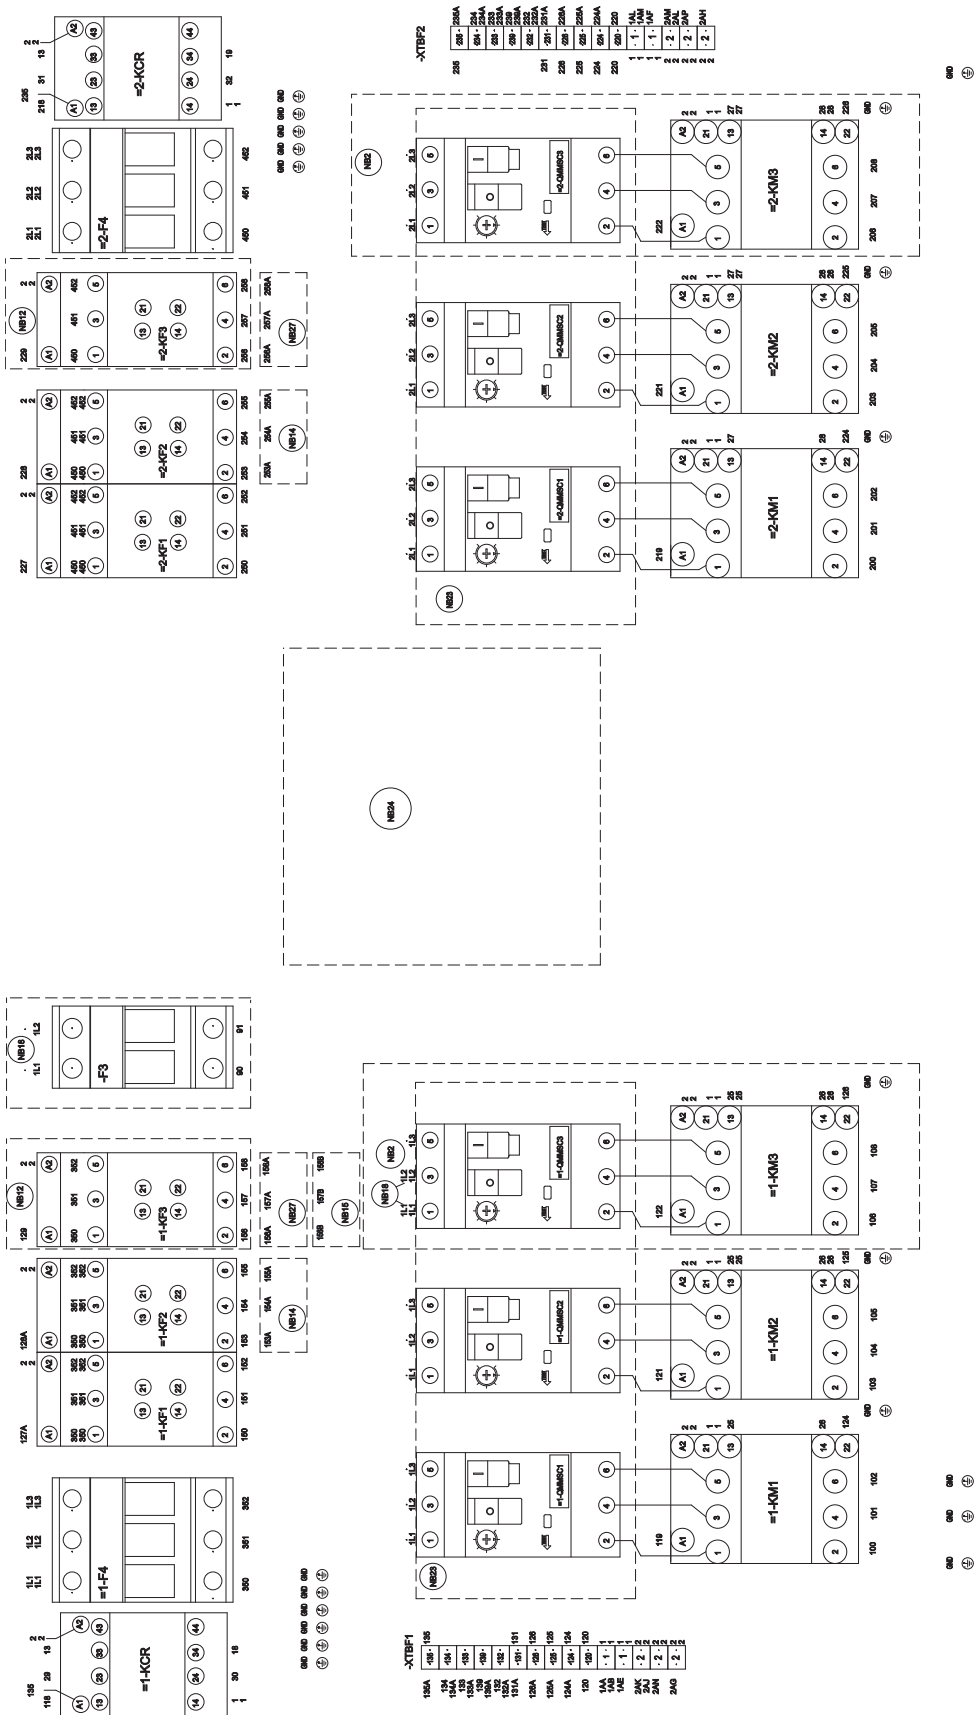

# Dual Pump Wiring

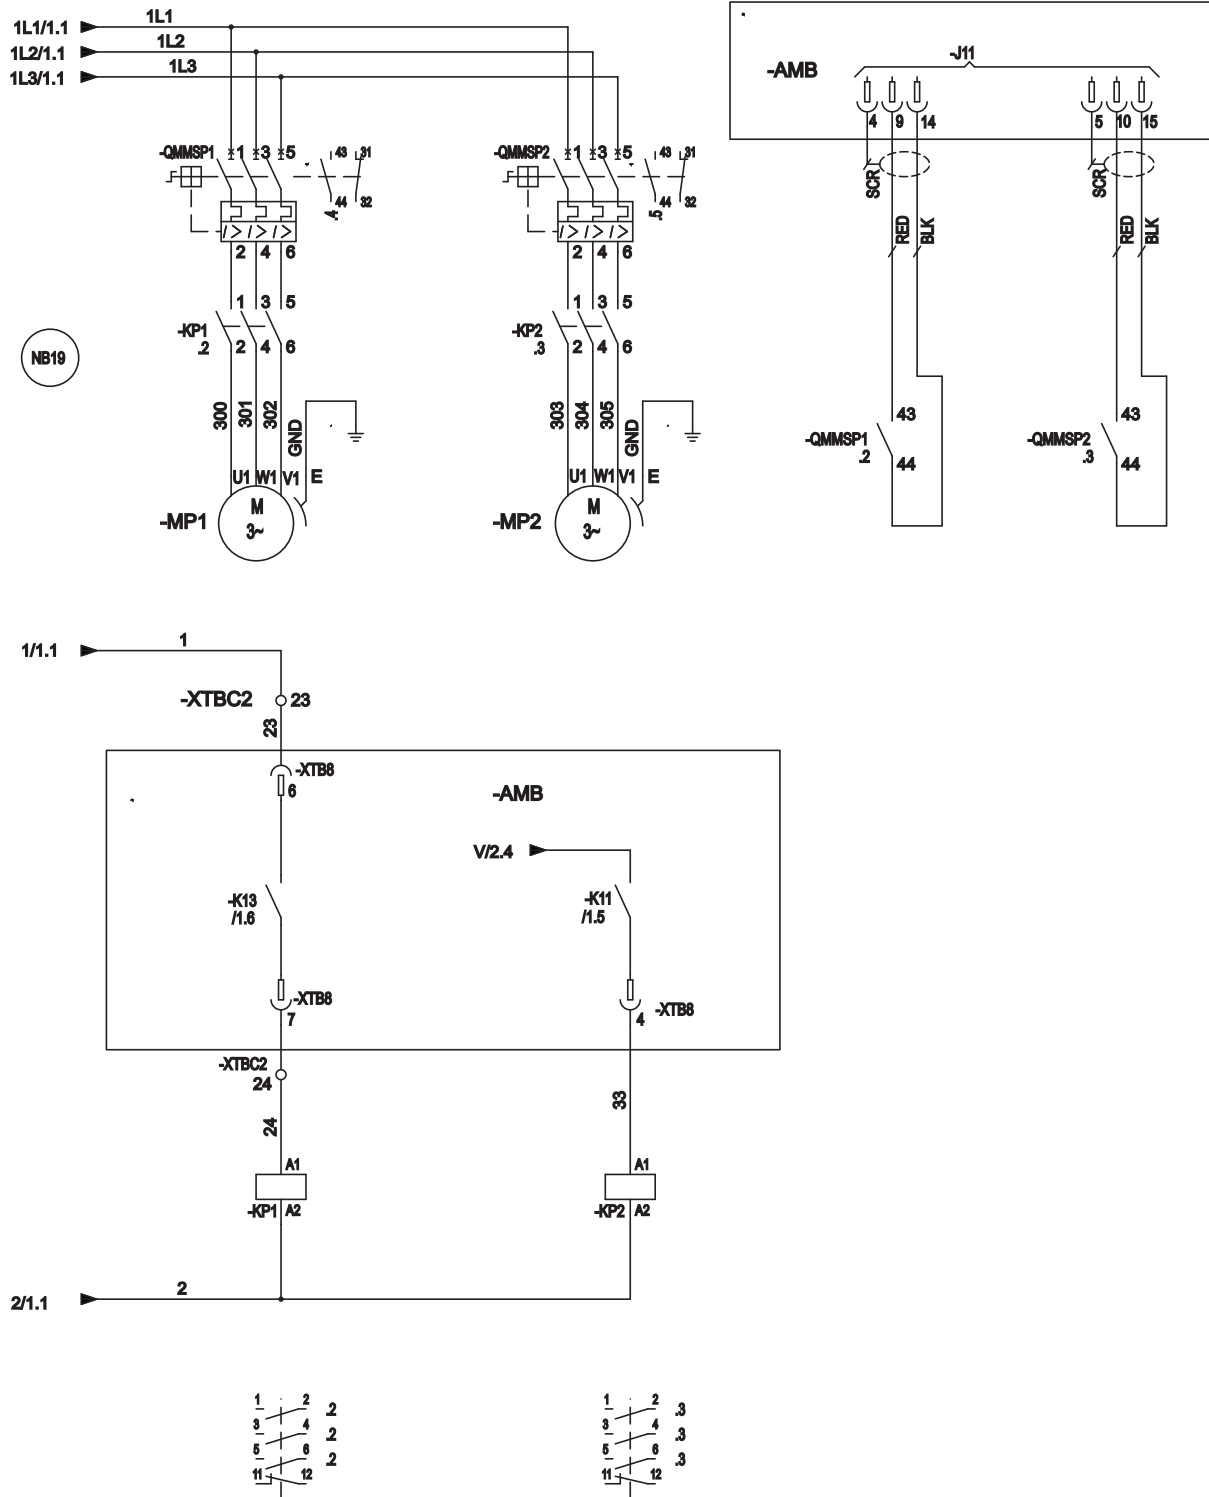

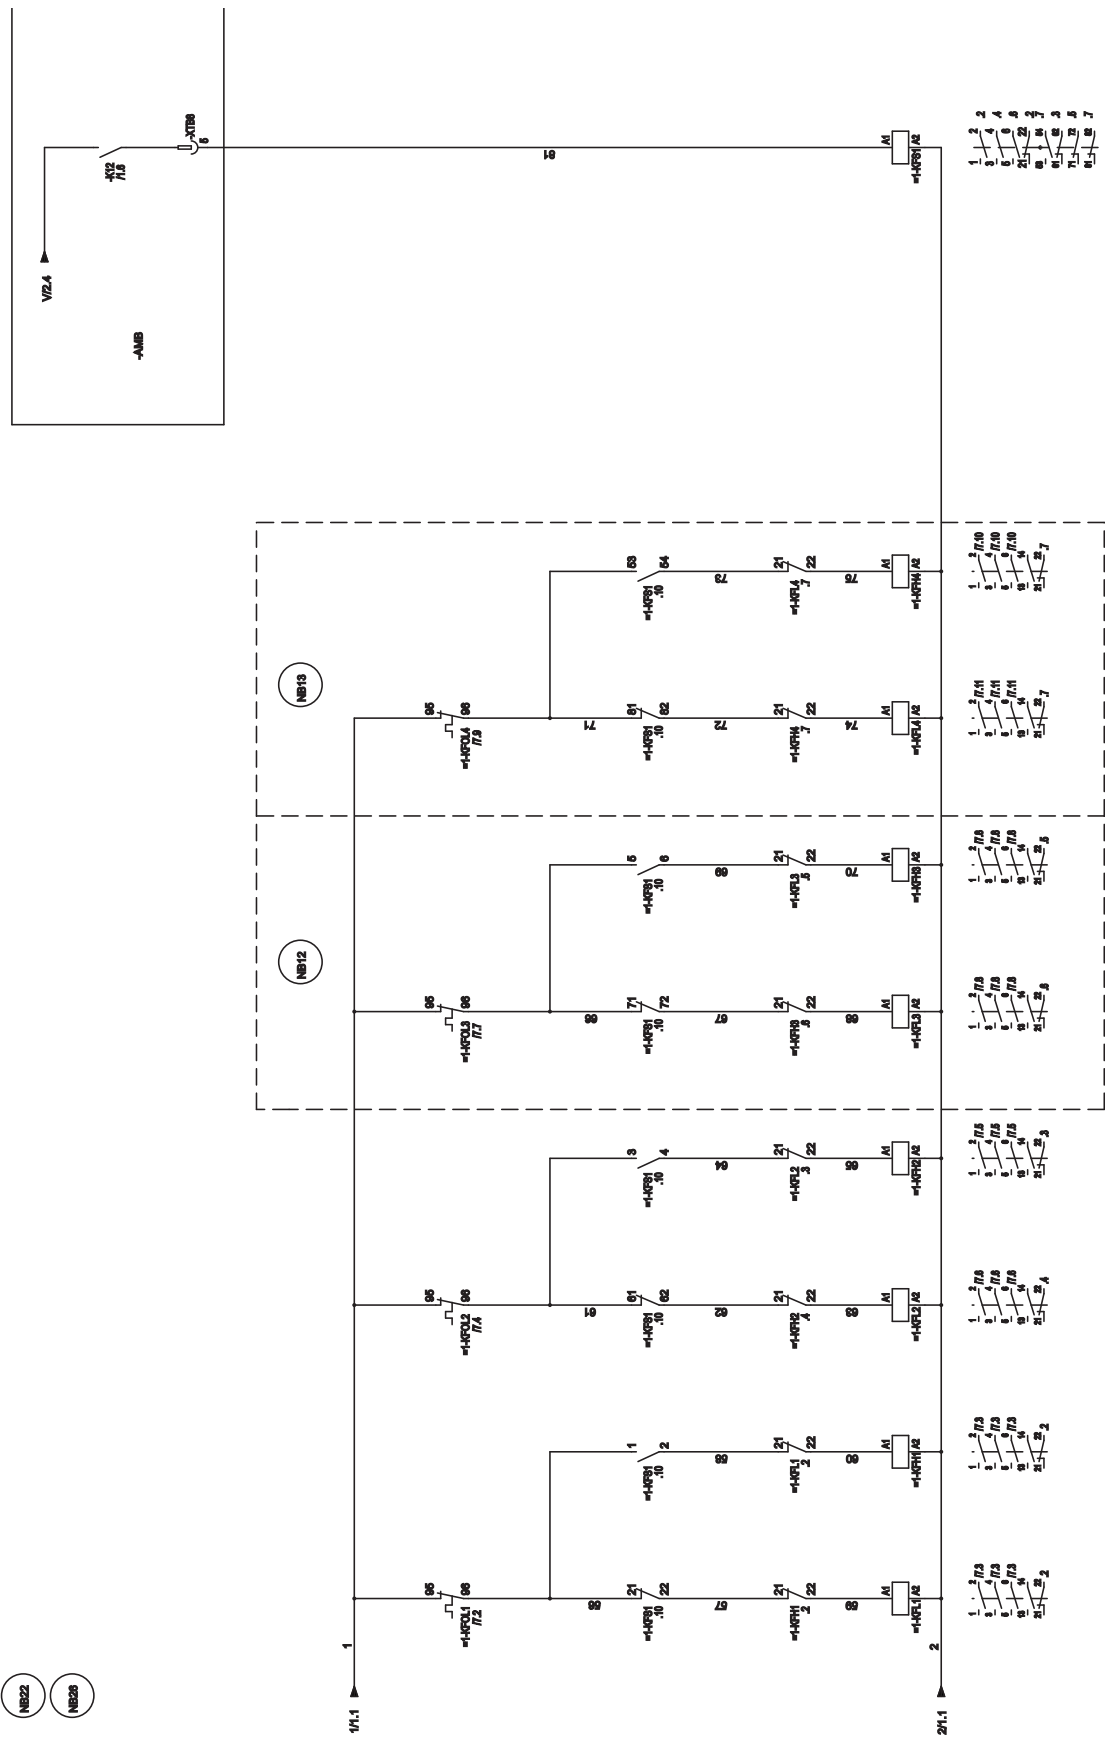

## 62





| Designation | DESCRIPTION   |
|-------------|---------------|
| ACC         | ACCESSORY     |
| - ADIS      | DISPLAY BOARD |
| - AMB       | MICRO BOARD   |

|        |                                 |
|--------|---------------------------------|
| - BAMB | AMBIENT                         |
| - BDP  | DISCHARGE PRESSURE              |
| - BECT | ENTERING CHILLED TEMPERATURE    |
| - BLCT | LEAVING CHILLED TEMPERATURE     |
|        | NOT FITTED ON REMOTE EVAP UNITS |

|       |                            |
|-------|----------------------------|
| - BMP | MOTOR PROTECTOR COMPRESSOR |
| - BSP | SUCTION PRESSURE           |

|       |                        |
|-------|------------------------|
| - CPF | CAPACITOR POWER FACTOR |
|-------|------------------------|

|       |                           |
|-------|---------------------------|
| - ECH | CRANKCASE HEATER          |
| - EEH | EVAPORATOR HEATER         |
| - EPH | PUMP HEATER               |
| - EXT | EXTERNAL TO CONTROL PANEL |

|       |                                                |
|-------|------------------------------------------------|
| - F   | FUSE                                           |
| - FHP | HIGH PRESSURE CUTOFF                           |
| - FSI | FAN SPEED INHIBIT TWO SPEED<br>FAN OPTION ONLY |

|     |                |
|-----|----------------|
| GND | GROUND         |
| G/Y | GREEN / YELLOW |

|   |                      |
|---|----------------------|
| J | PLUG BOARD CONNECTOR |
|---|----------------------|

|        |                                                         |
|--------|---------------------------------------------------------|
| - K    | CIRCUIT BOARD RELAY                                     |
| - KF   | FAN CONTACTOR LINE                                      |
| - KFH  | FAN CONTACTOR HIGH SPEED<br>(INCLUDING COIL SUPPRESSOR) |
| - KFL  | FAN CONTACTOR LOW SPEED<br>(INCLUDING COIL SUPPRESSOR)  |
| - KFOL | FAN OVERLOAD                                            |
| - KFS  | RELAY FAN SPEED                                         |
| - KM   | COMPRESSOR CONTACTOR<br>(INCLUDING COIL SUPPRESSOR)     |
| - KCR  | CONTROL RELAY                                           |
| - KP   | PUMP CONTACTOR PART<br>(INCLUDING COIL SUPPRESSOR)      |

|      |                  |
|------|------------------|
| - M  | COMPRESSOR MOTOR |
| - MF | MOTOR FAN        |
| - MP | MOTOR PUMP       |

|    |          |
|----|----------|
| NU | NOT USED |
|----|----------|

|     |                                                                |
|-----|----------------------------------------------------------------|
| PE  | PROTECTIVE EARTH                                               |
| PWM | PULSE WIDTH MODULATION TEMP<br>RESET or REMOTE UNLOAD 2nd STEP |

| Designation | DESCRIPTION                     |
|-------------|---------------------------------|
| - QCB       | CIRCUIT BREAKER                 |
| - QMMS      | MANUAL MOTOR STARTER COMPRESSOR |
| - QMMSP     | MANUAL MOTOR STARTER PUMP       |
| - QSD       | SWITCH DISCONNECT               |

|     |                        |
|-----|------------------------|
| R   | RESISTOR               |
| RED | RED                    |
| RP  | RUN PERMISSIVE         |
| RU  | REMOTE UNLOAD 1st STEP |

|       |                 |
|-------|-----------------|
| SCR   | SCREEN          |
| - SF  | FLOW SWITCH     |
| - SKP | KEYPAD          |
| - SOA | SWITCH OFF AUTO |

|      |                     |
|------|---------------------|
| - T  | TRANSFORMER         |
| - TC | TRANSFORMER CURRENT |

|       |                  |
|-------|------------------|
| - UBR | BRIDGE RECTIFIER |
|-------|------------------|

|     |       |
|-----|-------|
| WHT | WHITE |
|-----|-------|

|        |                         |
|--------|-------------------------|
| - XTBC | TERMINAL BLOCK CUSTOMER |
| - XTBF | TERMINAL BLOCK FACTORY  |

|         |                                                           |
|---------|-----------------------------------------------------------|
| - YHGSV | HOT GAS SOLENOID VALVE<br>(INCLUDING COIL SUPPRESSOR)     |
| - YLLSV | LIQUID LINE SOLENOID VALVE<br>(INCLUDING COIL SUPPRESSOR) |
|         | FIELD MOUNTED AND WIRED ON REMOTE EVAP UNITS              |

|        |            |
|--------|------------|
| - ZCPR | COMPRESSOR |
|--------|------------|

|                                                                                     |                      |
|-------------------------------------------------------------------------------------|----------------------|
|  | NOTE WELL (SEE NOTE) |
|-------------------------------------------------------------------------------------|----------------------|

|                                                                                     |                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------|
|  | WIRING AND ITEMS SHOWN THUS<br>ARE STANDARD YORK ACCESSORIES |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------|

|                                                                                     |                                                         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | WIRING AND ITEMS SHOWN THUS<br>ARE NOT SUPPLIED BY YORK |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|

|                                                                                     |                                                                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | ITEMS THUS ENCLOSED FORM A<br>COMPONENTS OR SETS OF COMPONENTS |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------|

# Notes – continued

| GENERAL |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a.      | THIS DRAWING IS BASED ON IEC SYMBOLS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| b.      | FIELD WIRING TO BE IN ACCORDANCE WITH THE RELEVANT ELECTRICAL CODE AS WELL AS ALL OTHER APPLICABLE CODES AND SPECIFICATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| c.      | ALL SOURCES OF SUPPLY SHOWN ON THIS DIAGRAM TO BE TAKEN FROM ONE MAIN ISOLATOR, NOT SHOWN OR SUPPLIED BY YORK.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| d.      | GREEN AND YELLOW WIRE IS USED FOR EARTH, MULTI-COLOURED CABLE USED FOR LOW VOLTAGE. RED WIRE USED FOR A.C. CONTROL, BLUE WIRE FOR NEUTRAL, BLACK WIRE FOR A.C. AND D.C. POWER. ORANGE WIRE SHOULD BE USED FOR INTERLOCK CONTROL WIRING SUPPLIED BY EXTERNAL SOURCE.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| e.      | LEGEND DESIGNATION DEPICTS COMPONENT ABBREVIATIONS. NUMBER PREFIX LOCATED, IF APPLICABLE, ON SCHEMATIC CIRCUIT, REFERS TO SYSTEM THEREON, E.G.= 1-FHP2 REFERS TO HIGH PRESSURE CUTOUT NO 2 ON SYSTEM NO 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| f.      | ALL WIRING TO CONTROL SECTION VOLTAGE FREE CONTACTS REQUIRES A SUPPLY PROVIDED BY THE CUSTOMER MAXIMUM VOLTAGE 240 VOLTS. THE CUSTOMER MUST TAKE PARTICULAR CARE WHEN DERIVING THE SUPPLIES FOR THE VOLTAGE FREE TERMINALS WITH REGARD TO A COMMON POINT OF ISOLATION. THUS, THESE CIRCUITS WHEN USED MUST BE FED VIA THE COMMON POINT OF ISOLATION THE VOLTAGE TO THESE CIRCUITS IS REMOVED WHEN THE COMMON POINT OF ISOLATION TO THE UNIT IS OPENED. THIS COMMON POINT OF ISOLATION IS NOT SUPPLIED BY YORK. THE YORK VOLTAGE FREE CONTACTS ARE RATED AT 100VA. ALL INDUCTIVE DEVICES {RELAYS} SWITCH BY THE YORK VOLTAGE FREE CONTACTS MUST HAVE THEIR COIL SUPPRESSED USING STANDARD R/C SUPPRESSORS. |
| g.      | CUSTOMER VOLTAGE FREE CONTACTS CONNECTED TO TERMINAL 13 MUST BE RATED AT 30V 5ma                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| h.      | NO CONTROLS {RELAYS ETC.} SHOULD BE MOUNTED IN ANY SECTION OF THE CONTROL PANEL. ADDITIONALLY, CONTROL WIRING NOT CONNECTED TO THE YORK CONTROL PANEL SHOULD NOT BE RUN THROUGH THE PANEL.<br>IF THESE PRECAUTIONS ARE NOT FOLLOWED, ELECTRICAL NOISE COULD CAUSE MALFUNCTIONS OR DAMAGE TO THE UNIT AND ITS CONTROLS.                                                                                                                                                                                                                                                                                                                                                                                    |
| NOTES   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1       | REFER TO INSTALATION COMMISIONING OPERATION AND MAINTENANCE MANUAL FOR CUSTOMER CONNECTIONS AND CUSTOMER CONNECTION NOTES, NON COMPLIANCE TO THESE INSTRUCTIONS WILL INVALIDATE UNIT WARRANTY.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2       | WIRING AND COMPONENTS FOR COMPRESSOR 3 ONLY FITTED WHEN UNIT HAS 3 COMPRESSORS ON THE SYSTEM. 1-BMP3 IS REPLACED BY A LINK ACROSS TERMINALS 134 & 135. 2-BMP3 IS REPLACED BY A LINK ACROSS TERMINALS 234 & 235.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3       | FHP2 IS ONLY FITTED ON CE YLAA ??? AND ABOVE. WHEN NOT FITTED 1-FHP2 IS REPLACED BY A LINK ACROSS TERMINALS 132 & 139. 2-FHP2 IS REPLACED BY A LINK ACROSS TERMINALS 232 & 239                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 4       | FITTED ON UNITS WITH HOT GAS BYPASS OPTION.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 5       | EMS OPTION IS WIRED AS SHOWN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 6       | THIS WIRING MUST BE USED FOR OLD DISPLAY 031-0110-000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 7       | NETWORK CONNECTION POINT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 8       | PRINTER PORT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 9       | REMOTE EMERGENCY STOP CAN BE WIRED BETWEEN TERMINAL L AND 5 AFTER REMOVING LINK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 10      | POWER FACTOR CORRECTION ACCESSORY. POWER FACTOR CORRECTION FITTED TO EACH COMPRESSOR CONTACTOR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 11      | NOT FITTED ON COMPRESSORS WITH INTERNAL MOTOR PROTECTION. FOR SYTEM 1 TERMINALS 132 & 133, 133 & 134 AND 134 & 135 ARE LINKED. FOR SYTEM 2 TERMINALS 232 & 233, 233 & 234 AND 234 & 235 ARE LINKED.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 12      | ONLY FITTED ON SYSTEMS WITH 3 OR 4 FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 13      | ONLY FITTED ON SYSTEMS WITH 4 FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 14      | ONLY FITTED ON SYSTEMS WITH 5 FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 15      | ONLY FITTED ON SYSTEMS WITH 6 FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 16      | INPUT SWITCH DISCONNECT( STANDARD ON CE UNITS) OR CIRCUIT BREAKER OPTION REPLACES INPUT TERMINAL BLOCK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 17      | INPUT SWITCH DISCONNECT & SYSTEM CIRCUIT BREAKER OPTION REPLACES INPUT TERMINAL BLOCK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 18      | 115V CONTROL CIRCIUT REQUIRES A 115V SUPPLY UNLESS CONTROL CIRCUIT TRANSFORMER -T2 & -F3 ARE FITTED (STANDARD ON CE UNITS)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 19      | FOR OPTIONAL HYDRO KIT. HEATER -EPH IS FITTED AND WIRED AS SHOWN.<br>ON SINLGE PUMP -KP1, -QMMSP1 & -MP1 ARE FITTED & WIRED AS SHOWN.<br>ON TWO PUMP HYDRO KITS -KP2, -QMMSP2 & -MP2 ARE ALSO FITTED AND WIRED AS SHOWN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 20      | CURRENT MEASUREMENT OPTION WIRED AS SHOW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 21      | ONLY FITTED ON SYSTEMS WITH SINGLE SPEED FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 22      | ONLY FITTED ON SYSTEMS WITH TWO SPEED FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 23      | OPTIONAL COMPRESSOR MANUAL MOTORS STARTERS ( STANDARD ON CE UNITS)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 24      | SEE SHEET 3 OF CONNECTION DIAGRAM FOR POWER INPUT OPTIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 25      | ALTERNATE CONNECTIONS SHOWN FOR DIFFERENT TWO SPEED MOTOR TYPES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 26      | ONLY FITTED ON SYSTEMS WITH A MAXIMUM OF 4 FANS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

# Application Data

## UNIT LOCATION

The YLAA chillers are designed for outdoor installation. When selecting a site for installation, be guided by the following conditions:

1. For outdoor locations of the unit, select a place having an adequate supply of fresh air for the condenser.
2. Avoid locations beneath windows or between structures where normal operating sounds may be objectionable.
3. Installation sites may be either on a roof, or at ground level. (See FOUNDATION.)
4. The condenser fans are the propeller-type, and are not recommended for use with duct work in the condenser air stream.
5. When it is desirable to surround the unit(s), it is recommended that the screening be able to pass the required chiller CFM without exceeding 0.1" of water external static pressure.
6. Protection against corrosive environments is available by supplying the units with either copper fin, cured phenolic, or epoxy coating on the condenser coils. The phenolic or epoxy coils should be offered with any units being installed at the seashore or where salt spray may hit the unit.

In installations where winter operation is intended and snow accumulations are expected, additional height must be provided to ensure normal condenser air flow.

Recommended clearances for units are given in DIMENSIONS. When the available space is less, the unit(s) must be equipped with the discharge pressure transducer option to permit high pressure unloading in the event that air recirculation were to occur.

## FOUNDATION

The unit should be mounted on a flat and level foundation, ground or roof, capable of supporting the entire operating weight of the equipment. Operating weights are given in the PHYSICAL DATA tables.

**ROOF LOCATIONS** – Choose a spot with adequate structural strength to safely support the entire weight of the unit and service personnel. Care must be taken not to damage

the roof during installation. If the roof is “bonded”, consult the building contractor or architect for special installation requirements. Roof installations should incorporate the use of spring-type isolators to minimize the transmission of vibration into the building structure.

**GROUND LEVEL INSTALLATIONS** – It is important that the units be installed on a substantial base that will not settle, causing strain on the liquid lines and resulting in possible leaks. A one-piece concrete slab with footers extending below the frost line is highly recommended. Additionally, the slab should not be tied to the main building foundation as noises will telegraph.

Mounting holes (5/8" diameter) are provided in the steel channel for bolting the unit to its foundation. See DIMENSIONS.

For ground level installations, precautions should be taken to protect the unit from tampering by or injury to unauthorized persons. Screws on access panels will prevent casual tampering; however, further safety precautions, such as unit enclosure options, a fenced-in enclosure, or locking devices on the panels may be advisable. Check local authorities for safety regulations.

## CHILLED LIQUID PIPING

The chilled liquid piping system should be laid out so that the circulating pump discharges into the evaporator. The inlet and outlet evaporator liquid connections are given in DIMENSIONS.

Hand stop valves are recommended for use in all lines to facilitate servicing. Drain connections should be provided at all low points to permit complete drainage of the evaporator and system piping. Additionally, a strainer (40 mesh) is recommended for use on the INLET line to the evaporator.

Pressure gauge connections are recommended for installation in the inlet and outlet water lines. Gauges are not furnished with the unit and are to be furnished by other suppliers.

The chilled liquid lines that are exposed to outdoor ambients should be wrapped with a supplemental heater cable and covered with insulation. As an alternative, ethylene glycol should be added to protect against freeze-up during low ambient periods.

A flow switch is available as an accessory on all units. The flow switch (or its equivalent) must be installed in the leaving water piping of the evaporator and must not be used to start and stop the unit.

# Guide Specifications

## PART 1 – GENERAL

### 1.01 SCOPE

- A. The requirements of the General Conditions, Supplementary Conditions, Division 1, and Drawings apply to all Work herein.
- B. Provide Microprocessor controlled, multiple-scroll compressor, air-cooled, liquid chillers of the scheduled capacities as shown and indicated on the Drawings, including but not limited to:
  - 1. Chiller package with ZERO Ozone Depletion Potential Refrigerant R-410A
  - 2. Electrical power and control connections
  - 3. Chilled water connections
  - 4. Factory Start-Up
  - 5. Charge of refrigerant and oil (Except for Remote Evaporator applications).

### 1.02 QUALITY ASSURANCE

- A. Products shall be Designed, Tested, Rated and Certified in accordance with, and installed in compliance with applicable sections of the following Standards and Codes:
  - 1. ANSI/ASHRAE Standard 15 – *Safety Code for Mechanical Refrigeration*
  - 2. ASHRAE 90.1– *Energy Efficiency compliance.*
  - 3. ANSI/NFPA Standard 70 – *National Electrical Code (N.E.C.).*
  - 4. ASME Boiler & Pressure Vessel Code, Section VIII, Division 1.
  - 5. ARI Standard 550/590 – *Positive Displacement Compressors and Air Cooled Rotary Screw Water-Chilling Packages.*
  - 6. Conform to Intertek Testing Services, formerly ETL, for construction of chillers and provide ETL/ cETL Listing label.
  - 7. Manufactured in facility registered to ISO 9002.
  - 8. OSHA – Occupational Safety and Health Act
- B. Factory Test: Chiller shall be pressure-tested, evacuated and fully charged with refrigerant and oil, and shall be factory operational run tested with water flowing through the vessel.
- C. Chiller manufacturer shall have a factory trained and supported service organization that is within a 50 mile radius of the site.
- D. Warranty: Manufacturer shall Warrant all equipment and material of its manufacture against defects in

workmanship and material for a period of one year from date of initial start-up or eighteen (18) months from date of shipment, whichever occurs first.

### 1.03 DELIVERY AND HANDLING

- A. Unit shall be delivered to job site fully assembled and charged with refrigerant and oil by the Manufacturer.
- B. Unit shall be stored and handled per Manufacturer's instructions.
- C. Protect the chiller and its accessories from the weather and dirt exposure during shipment.
- D. During shipment, provide protective covering over vulnerable components. Fit nozzles and open ends with plastic enclosures.

## PART 2 - PRODUCTS

### 2.01 CHILLER MATERIALS AND COMPONENTS

- A. General: Install and commission, as shown on the schedules and plans, factory assembled, charged, and tested air cooled scroll compressor chiller(s) as specified herein. Chiller shall be designed, selected, and constructed using a refrigerant with Flammability rating of "1", as defined by ANSI/ASHRAE STANDARD - 34 *Number Designation and Safety Classification of Refrigerants*. Chiller shall include, but is not limited to: a complete system with a single refrigerant circuit 35 tons (123kW) and below, and not less than two refrigerant circuits above 35 tons (123kW), scroll compressors, direct expansion type evaporator, air-cooled condenser, refrigerant, lubrication system, interconnecting wiring, safety and operating controls including capacity controller, control center, motor starting components, and special features as specified herein or required for safe, automatic operation.
- B. Cabinet: External structural members shall be constructed of heavy gauge, galvanized steel coated with baked on powder paint which, when subject to ASTM B117, 1000 hour, 5% salt spray test, yields minimum ASTM 1654 rating of "6".
- C. Service Isolation valves: Service suction and discharge (ball type) isolation valves are added to unit per system. This option also includes a system high-pressure relief valve in compliance with ASHRAE15. (Factory-mounted.)
- D. Pressure Transducers and Readout Capability
  - 1. Discharge Pressure Transducers: Permits unit to

sense and display discharge pressure.

2. Suction Pressure Transducers: Permits unit to sense and display suction pressure.

## 2.02 COMPRESSORS

Compressors: Shall be hermetic, scroll-type, including:

1. Compliant design for axial and radial sealing
2. Refrigerant flow through the compressor with 100% suction cooled motor.
3. Large suction side free volume and oil sump to provide liquid handling capability.
4. Compressor crankcase heaters to provide extra liquid migration protection.
5. Annular discharge check valve and reverse vent assembly to provide low-pressure drop, silent shutdown and reverse rotation protection.
6. Initial Oil charge.
7. Oil Level sightglass.
8. Vibration isolator mounts for compressors.
9. Brazed-type connections for fully hermetic refrigerant circuits.
10. Compressor Motor overloads capable of monitoring compressor motor current. Provides extra protection against compressor reverse rotation, phase-loss and phase imbalance

## 2.03 REFRIGERANT CIRCUIT COMPONENTS

Each refrigerant circuit shall include: a discharge service ball type isolation valve, high side pressure relief, liquid line shutoff valve with charging port, low side pressure relief device, filter-drier, solenoid valve, sight glass with moisture indicator, thermostatic expansion valves, and flexible, closed-cell foam insulated suction line and suction pressure transducer.

## 2.04 HEAT EXCHANGERS

### A. Evaporator: YLAA

1. Direct expansion type with refrigerant inside high efficiency copper tubes, chilled liquid forced over the tubes by brass baffles.
2. Constructed, tested, and stamped in accordance with applicable sections of ASME pressure vessel code for minimum 450 psig (3103 kPa) refrigerant side design working pressure and 150 PSIG (1034 kPa) water side design working pressure.
3. Shell covered with 3.4" (19mm), flexible, closed cell insulation, thermal conductivity of 0.26k ([BTU/HR-Ft<sup>2</sup> -°F]/in.) maximum. Water nozzles with grooves for mechanical couplings, and insulated by Contractor after pipe installation.
4. Provide vent and drain fittings, and thermostatically controlled heaters to protect to -20°F (29°C)

ambient in off-cycle.

### B. Air Cooled Condenser:

1. Coils: Coils: Internally enhanced, seamless copper tubes, mechanically expanded into aluminum alloy fins with full height collars. Subcooling coil an integral part of condenser. Design working pressure shall be 650 PSIG (45 bar).
2. Low Sound Fans Shall be dynamically and statically balanced, direct drive, corrosion resistant glass fiber reinforced composite blades molded into a low noise, full-airfoil cross section, providing vertical air discharge and low sound. Each fan in its own compartment to prevent crossflow during fan cycling. Guards of heavy gauge, PVC (polyvinylchloride) coated or galvanized steel.
3. Fan Motors: High efficiency, direct drive, 6 pole, 3 phase, insulation class "F", current protected, Totally Enclosed Air-Over (TEAO), rigid mounted, with double sealed, permanently lubricated, ball bearings.

## 2.05 CONTROLS

- A. General: Automatic start, stop, operating, and protection sequences across the range of scheduled conditions and transients.

- B. Microprocessor Enclosure: Rain and dust tight NEMA 3R/12 (IP55) powder painted steel cabinet with hinged, latched, and gasket sealed door.

### C. Microprocessor Control Center:

1. Automatic control of compressor start/stop, anti-coincidence and anti-recycle timers, automatic pumpdown shutdown, condenser fans, evaporator pump, evaporator heater, unit alarm contacts, and chiller operation from 0°F to 125°F (-18°C to 52°C) ambient. Automatic reset to normal chiller operation after power failure.
2. Remote water temperature reset via up to two steps of demand (load) limiting.
3. Software stored in non-volatile memory, with programmed setpoints retained in lithium battery backed real time clock (RTC) memory for minimum 5 years.
4. Forty character liquid crystal display, descriptions in English (or Spanish, French, Italian, or German), numeric data in English (or Metric) units. Sealed keypad with sections for Setpoints, Display/Print, Entry, Unit Options & clock, and On/Off Switch.
5. Programmable Setpoints (within Manufacturer limits): display language; chilled liquid temperature



# Guide Specifications – continued

setpoint and range, remote reset temperature range, set daily schedule/holiday for start/stop, manual override for servicing, low and high ambient cutouts, number of compressors, low liquid temperature cutout, low suction pressure cutout, high discharge pressure cutout, anti-recycle timer (compressor start cycle time), and anti-coincident timer (delay compressor starts).

6. Display Data: Return and leaving liquid temperatures, low leaving liquid temperature cutout setting, low ambient temperature cutout setting, outdoor air temperature, English or metric data, suction pressure cutout setting, each system suction pressure (optional on YCAL0014-0060 models), discharge pressure (optional), liquid temperature reset via a YORK ISN DDC or Building Automation System (by others) via a 4-20milliamp or 0-10 VDC input with optional BAS interface, anti-recycle timer status for each compressor, anti-coincident system start timer condition, compressor run status, no cooling load condition, day, date and time, daily start/stop times, holiday status, automatic or manual system lead/lag control, lead system definition, compressor starts/operating hours (each), status of hot gas valves, evaporator heater and fan operation, run permissive status, number of compressors running, liquid solenoid valve status, load & unload timer status, water pump status.
7. System Safeties: Shall cause individual compressor systems to perform auto shut down; manual reset required after the third trip in 90 minutes. Includes: high discharge pressure, low suction pressure, high pressure switch, and motor protector. Compressor motor protector shall protect against damage due to high input current or thermal overload of windings.
8. Unit Safeties: Shall be automatic reset and cause compressors to shut down if low ambient, low leaving chilled liquid temperature, under voltage, and flow switch operation. Contractor shall provide flow switch and wiring per chiller manufacturer requirements.
9. Alarm Contacts: Low ambient, low leaving chilled liquid temperature, low voltage, low battery, and (per compressor circuit): high discharge pressure, and low suction pressure.

D. Manufacturer shall provide any controls not listed above, necessary for automatic chiller operation. Mechanical Contractor shall provide field control wiring necessary to interface sensors to the chiller control system.

## 2.06 POWER CONNECTION AND DISTRIBUTION

### A. Power Panels:

1. NEMA 3R/12 (IP55) rain/dust tight, powder painted steel cabinets with hinged, latched, and gasket sealed outer doors. Provide main power connection(s), control power connections, compressor and fan motor start contactors, current overloads, and factory wiring.
2. Power supply shall enter unit at a single location, be 3 phase of scheduled voltage, and connect to individual terminal blocks per compressor. Separate disconnecting means and/or external branch circuit protection (by Contractor) required per applicable local or national codes.

B. Compressor, control and fan motor power wiring shall be located in an enclosed panel or routed through liquid tight conduit.

## 2.07 ACCESSORIES AND OPTIONS

Some accessories and options supercede standard product features. Your YORK representative will be pleased to provide assistance.

A. Microprocessor controlled, Factory installed Across the-Line type compressor motor starters as standard.

### B. Outdoor Ambient Temperature Control

1. Low Ambient Control: Permits unit operation to 0°F ambient. Standard unit controls to 30°F ambient.
2. High Ambient Control: Permits unit operation above 115°F ambient.

### C. Power Supply Connections:

1. Single Point Power Supply: Single point Terminal Block for field connection and interconnecting wiring to the compressors. Separate external protection must be supplied, by others, in the incoming power wiring, which must comply with the National Electric Code and/or local codes.
2. Single Point or Multiple Point Disconnect: Single or Dual point Non-Fused Disconnect(s) and lockable external handle (in compliance with Article 440-14 of N.E.C.) can be supplied to isolate the unit power voltage for servicing. Separate external fusing must be supplied, by others, in the incoming power wiring, which must comply with the National Electric Code and/or local codes.
3. Single Point Circuit Breaker: Single point Terminal Block with Circuit Breaker and lockable exter-

nal handle (in compliance with Article 44014 of N.E.C.) can be supplied to isolate power voltage for servicing. Incoming power wiring must comply with the National Electric Code and/or local codes.

E. Control Power Transformer: Converts unit power voltage to 120-1-60 (500 VA capacity). Factory-mounting includes primary and secondary wiring between the transformer and the control panel.

F. Condenser Coil Environmental Protection:

1. Post-Coated Dipped: Dipped-cured coating on condenser coils for seashore and other corrosive applications (with the exception of strong alkalis, oxidizers, and wet bromine, chlorine and fluorine in concentrations greater than 100ppm).

H. Protective Chiller Panels (Factory or Field Mounted)

1. Louvered Panels (condenser coils only): Painted steel as per remainder of unit cabinet, over external condenser coil faces.
2. Wire Panels (full unit): Heavy gauge, welded wire-mesh, coated to resist corrosion, to protect condenser coils from incidental damage and restrict unauthorized access to internal components.
3. Louvered Panels (full unit): Painted steel as per remainder of unit cabinet, to protect condenser coils from incidental damage, visually screen internal components, and prevent unauthorized access to internal components.
4. Louvered/Wire Panels: Louvered steel panels on external condenser coils painted as per remainder of unit cabinet. Heavy gauge, welded wire-mesh, coated to resist corrosion, around base of machine to restrict unauthorized access.
5. End Louver (Hail Guard): Louvered steel panels on external condenser coil faces located at the ends of the chiller.

I. Flow Switch (Field-mounted): Vapor proof SPDT, NEMA 4X switch ( \_\_\_ 150 PSIG or \_\_\_ 300 PSIG), -20°F to 250°F.

J. Differential Pressure Switch: Alternative to an above mentioned flow switch. Pretempco model DPS300A-P40PF-82582-5 (300 psi max. working pressure) SPDT 5 amp 125/250VAC switch, Range 3 - 40 PSID, deadband 0.5 - 0.8 psi, with 1/4" NPTE Pressure Connections.

K. Evaporator options:

1. Provide 1-1/2" evaporator insulation in lieu of

standard 3/4".

2. Provide DX Evaporator with 300 PSIG water-side design working pressure in lieu of standard 150 PSIG.

3. Provide Raised Face Flanges for field installation on evaporator nozzles and field piping:
  - a. 150 PSIG, welded Flanges.
  - b. 300 PSIG, welded Flanges.

L. Remote Evaporator: Manufacturer shall provide separately: chiller less evaporator, leaving and return water sensors, and liquid line components (solenoid valves, filter driers, sight glasses, and TXVs), as discrete elements of a complete factory system. Contractor shall be field erect system and provide interconnecting refrigerant piping and wiring in accordance with Manufacturer recommendations, and project plans and schedules. Where not otherwise specified, Contractor provided system piping shall be in accordance with applicable sections of ASHRAE Handbook.

M. Hot Gas By-Pass: Permits continuous, stable operation at capacities below the minimum step of unloading to as low as 5% capacity (depending on both the unit & operating conditions) by introducing an artificial load on the evaporator. Hot gas by-pass is installed on only one refrigerant circuit.

N. Microprocessor Membrane Keypad Graphics on in lieu of Standard English:

1. French language.
2. German language.
3. Spanish language.

O. Thermal Storage: Leaving chilled liquid setpoint range for charge cycle from 25°F to 20°F minimum, with automatic reset of the leaving brine temperature up to 40°F above the setpoint.

P. Low Temperature Process Brine: Leaving chilled liquid setpoint range 20°F to 50°F.

Q. Chicago Code Relief Valves to meet Chicago Code requirements.

R. Building Automation System (EMS) Reset Interface: Chiller to accept 4 to 20mA, 0 to 10 VDC, or discrete contact closure input to reset the leaving chilled liquid temperature.

S. OptiView Remote Control Panel (Field-mounted): Graphical interface panel to remotely control and monitor up to 8 different units.

- T. Multi-Unit Sequencing Panel (Field-mounted): Separate Sequencing control center is provided to permit control of up to eight chillers in parallel based on mixed liquid temperature.
- U. Sound Reduction (Factory-mounted):
  - 1. Ultra Quiet - Low speed, reduced noise fans
  - 2. Compressor Acoustic Sound Blankets
- V. Vibration Isolation (Field-mounted):
  - 1. Neoprene Pad Isolators.
  - 2. 1 Inch Deflection Spring Isolators: Level adjustable, spring and cage type isolators for mounting under the unit base rails.
  - 3. 2 Inch Deflection Seismic Isolators: Level adjustable, restrained mounts in rugged welded steel housing with vertical and horizontal limit stops. Housings shall be designed to withstand a minimum 1.0g accelerated force in all directions to 2 inches.
- B. Location: Locate chiller as indicated on drawings, including cleaning and service maintenance clearance per Manufacturer instructions. Adjust and level chiller on support structure.
- C. Components: Installing Contractor shall provide and install all auxiliary devices and accessories for fully operational chiller.
- D. Electrical: Coordinate electrical requirements and connections for all power feeds with Electrical Contractor (Division 16).
- E. Controls: Coordinate all control requirements and connections with Controls Contractor.
- F. Finish: Installing Contractor shall paint damaged and abraded factory finish with touch-up paint matching factory finish.

## **PART 3 – EXECUTION**

### **3.01 INSTALLATION**

- A. General: Rig and Install in full accordance with Manufacturers requirements, Project drawings, and Contract documents.