


Magnum Models Performance Aircraft

Focke-Wulf Ta 152

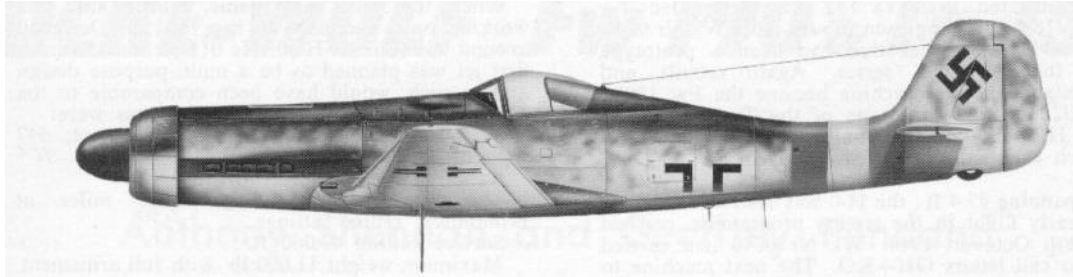

MEASUREMENT		60-inch span TA-152
Wing dihedral		5 inches (one tip up)
CG / center of gravity		3 inches from wing LE
Example aileron servo		Hitec HS-645 MG
Example elevator servo		Hitec HS-225 MG
Suggested aileron throw		UP 3/4 inch, DOWN 5/8 inch
Suggested elevator throw		UP 1/2 inch, DOWN 1/2 inch

VER 1 - DEC 2013

Ta 152 Kit Contents

1. Foam fuselage, split for component access, with carbon fiber tube longeron installed at factory
2. Foam wing cores, shipped in wing saddles
3. Small EPP foam block, used to remove "hot wire hairs" from wing cores
4. Carbon fiber tube wing spars
5. Carbon fiber tube wing spar stiffeners
6. Double brass tube wing spars joiner
7. Elevator pushrod and clevises
8. Mylar hinges (install with thin CA)
9. 4-40 Aileron torque rod
10. 4-40 all threaded Aileron push rods with 4-40 clevises
11. Plywood plates and 1/4-20 nylon bolts for wing mount
12. A building instructions manual on CD

OPTIONAL: Molded exhaust stacks



TA-152 Kit Contents – Small Parts (Typical)