



Dowinx

Interior Selection



Instruction

Before Assembly

- This manual explains matters that you should be aware of before using the product to prevent harm to you and others and damage to property. Please be sure to observe it for safe use.
- Please read this manual carefully before use and use it correctly and safely.
- The contents of this manual and precautions for use describe precautions for preventing misuse and accidents. Please keep it carefully and read it when necessary.
- When renting or transferring the product to a third party, be sure to attach this manual and fully explain how to handle it.

※The warranty period is one year after delivery. If any problem occurs due to our responsibility within the above warranty period, we will provide free replacement.

Please do not hesitate to contact the after-sales service department. ✉ Dowinx@vip.126.com



Contact US




I. Parts Checking


*Actual products may vary from image




Base 1pcs

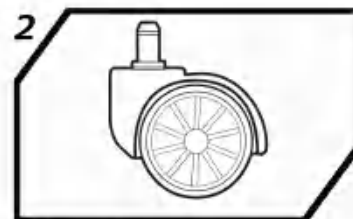

Wheel 5pcs

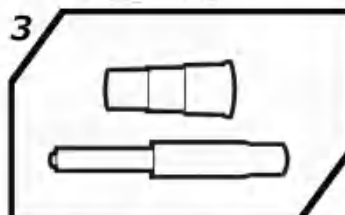


Gas lift/cover 1pcs

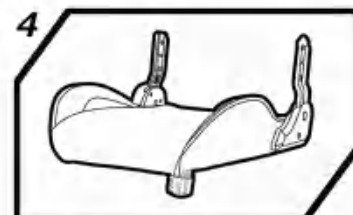


Seat cushion 1pcs




Backrest 1pcs

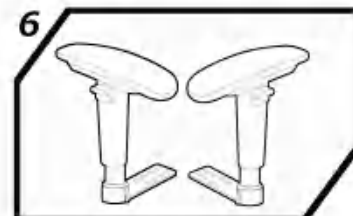

Armrest 2pcs

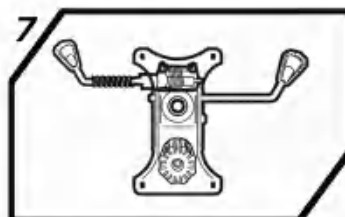


Tilt mechanism 1pcs

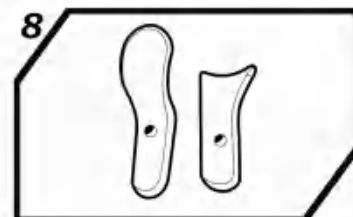

Side cover 2pairs




Head/lumbar pillow

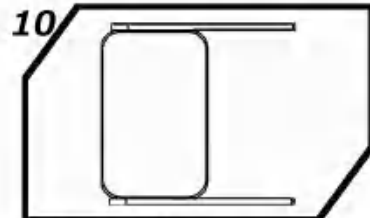


Footrest 1pcs




Rubber ring 3pcs※

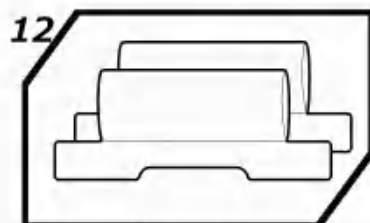

Mounting 2pcs

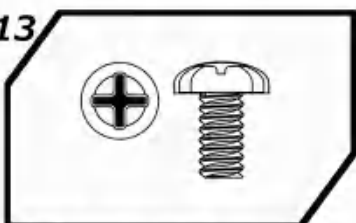

Side cover screw 3pcs※

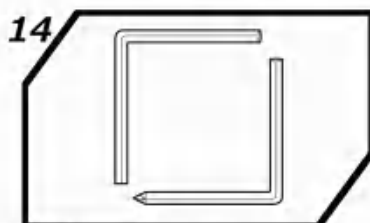

Allen key 2pcs

※To prevent loss during transportation a spare one is prepared.
Please contact our customer support if there are any missing parts or initial defects.

	Screw shape		SIZE	
15			M8X20 [With washer]	4
16			M8X20	8
17			M8X25	4
18			M6X30	4
※To prevent loss during transportation, screws are already installed in advance.				

2.Assembly


1.Wheels

- Turn the base over and insert the caster firmly.
- ※The wheels are a little hard to insert to prevent it from coming off.



2.Base and gas lift

- Insert the gas cylinder and cover into the base as shown.

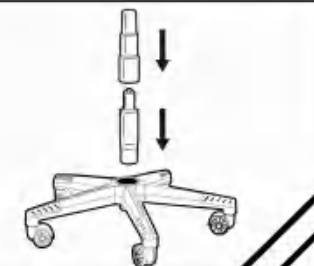


3. Tilt mechanism and armrests

Place the seat upside down on a stable surface, remove the pre-installed screws, attach the mechanism and armrests, and then tighten the screws to their original positions.

※Pay attention to the front and back of the tilt mechanism base.


※Please note that there is left / right discrimination in the armrest

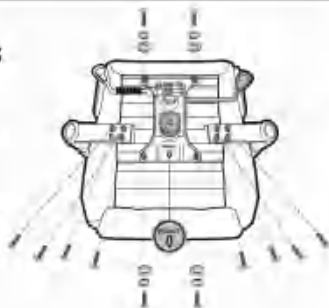

4. Footrest

Remove the pre-installed screws, install the rails, and tighten the screws in place.


After attaching both sides of the track, insert the footrest and then attach the rubber ring.

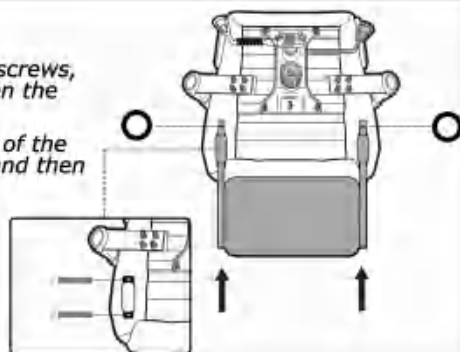

5. Backrest


Remove the screws that are pre-installed on the backrest, insert the backrest into the seat cushion, and tighten the screws to their original positions according to the hole positions.

※Adjust the angle of the backrest and make sure it is correct before tightening the screw to the end.

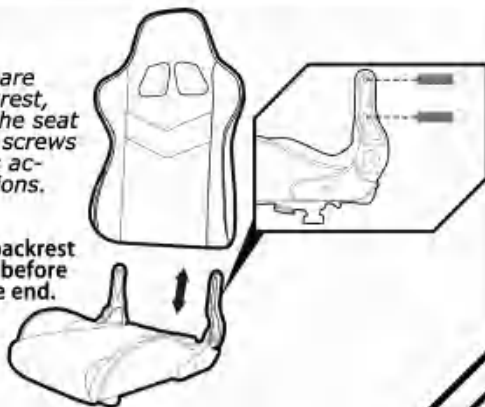

6. Sidecover

After ensuring that the backrest is in the correct position, use the No.13 screws to screw the cover onto both sides of the chair.

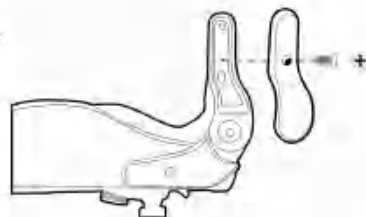


7. Head and lumbar pillow

Fasten the headrest and waist pillow as shown.

※The headrest strap is secured through the hole in the backrest.

※The waist pillow belt is secured by passing through the gap between the backrest and seat cushion

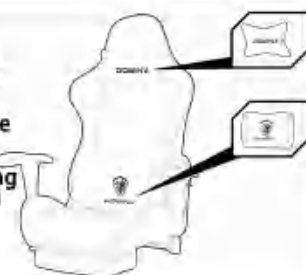

8. Finish

Assemble the chair body and base as shown.

※If you have any problems during installation, please contact our customer support: Dowinx@vip.126.com

9. Functions

Know how to use the following QR code.

■Please note that incorrect use may damage the product.

Using Instruction



