



LS-66LED SERIES ASSEMBLY INSTRUCTIONS

English

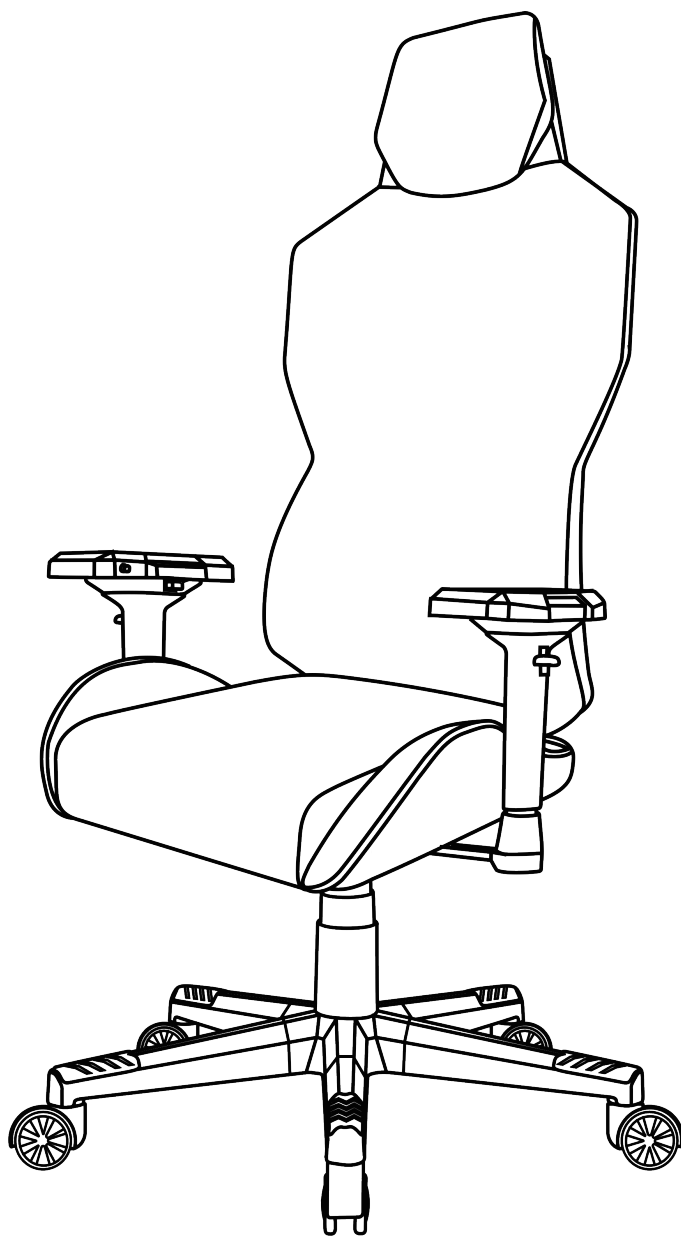

Recommended number of installers: 2

Book Ver. 1.1

(All illustrations are for illustrative purposes only)

TABLE OF CONTENTS

Safety Precautions	01
After-sale Policy	02
Point of Assembly	03
Parts Checking	04
Assembly①	05
Assembly②	06
Assembly③	07
Assembly④	08
Function Description	09
Function Description	10



Safety Precautions

The precautions written here are to prevent harm or damage to you or others. All of these are important contents for safe use, so be sure to observe them.



WARNING

Ignoring this instruction and using the product incorrectly may result in serious injury.



ATTENTION

Ignoring this instruction and using the product incorrectly may result in injury or property damage.



WARNING

CAUSE OF SUFFOCATION

Do not cover your head with the plastic bag used for packaging.

CAUSE OF EXPLOSION

Do not disassemble or lubricate the gas cylinder.
Do not put the gas cylinder into fire.
Do not incinerate.

CAUSE OF FALL

Do not stand on the chair, use it as a stepping stone, or place it in an unstable position.
Do not sit on the armrests or lean on the backrest, or sit on only part of the seat.
Do not use the chair on slippery floors.

CAUSE OF POISONING

Incineration may produce toxic gases.



ATTENTION

CAUSE OF INJURY OR DAMAGE

Be sure to assemble on a stable, flat surface.
Be careful not to get your hands or fingers caught in the casters or reclining parts.
When turning the chair, pay attention to your surroundings
Do not use it for anything other than its intended purpose.

CAUSE OF DISCOLORATION AND DEFORMATION

This product is for indoor or indoor use.
Outdoor use or getting wet may cause malfunction, rust or discoloration.
Avoid using the product in a place exposed to direct sunlight or heat such as a stove, or in a place with significant humidity or dryness.
※In addition to the above, please be sure to avoid other dangerous behaviors.

Care of Upholstery:

Gently scrub the surface with a soft brush, or use a vacuum cleaner to remove dust from seams and crevices.
If it gets dirty, just dab it with a soft cloth dampened with a small amount of diluted neutral detergent. Then, wipe off the cleaner with a towel dampened with a little water.

Care of Metal and Resin Parts:

Wipe with a soft dry cloth. If it gets dirty, wipe it with a diluted neutral detergent, then wipe it with a wrung cloth, and then wipe it with a dry cloth to completely remove the detergent and water.

After-sale Policy

【Manufacturer warranty】

(1) 365 days quality assurance

- ① Within 365 days from the date of order, if there is a failure or breakdown under the conditions of use in accordance with the instruction manual, we will replace the parts for free, or replace the product at our discretion.
- ② The following cases are not covered by the warranty even within the warranty period (paid maintenance).

- a. Damage caused by transportation, movement, drop and other reasons after delivery.
 - b. Malfunctions caused by failure to observe the precautions or specified conditions stated in the instruction manual, labels, packaging, etc., or malfunctions caused by incorrect use exceeding the limits.
 - c. Product damage repaired by anyone other than the our company or the designated supplier.
 - d. Damage caused by natural disasters such as earthquakes, fires, lightning strikes, wind disasters, floods, salt damage, or other external factors.
 - e. If the warranty card or order number is presented, the warranty period cannot be confirmed.
 - f. Leather (fabric) wear, synthetic leather hydrolysis or hardening, genuine leather discoloration or cracking, sun fading, etc.
 - g. Abrasions, scratches, stains, discoloration, etc. caused by daily use.
 - h. Wear on casters, etc.
 - i. In the case of other defects caused by the negligence of the customer.

(2) 30-day Return and Money Back Guarantee

- (Non-Amazon orders follow the rules of the corresponding platform)
- Refunds will be processed automatically upon return of the product to Amazon's designated location within 30 days of the date of your order, as long as you follow Amazon's return policy instructions.
- ※Please refer to the above link for the return method and return conditions.
- ※Original manufacturer packaging is required for returns. Please do not discard the original boxes.

【Other notes】

- The warranty information on this page promises to repair the product free of ctharge within the warranty period and conditions specified in the instruction manual.
- The warranty information provided on this page does not limit your legal rights, so if you have any questions about repairs after the warranty period , please contact us by email.
- 365-day quality assurance is a service that provides support (guarantee) for 365 days from the date of your order. After ordering a new replacement product, the warranty period will not be extended again.
- When lending or transferring our products to a third party, be sure to attach the order number and instruction manual together. In addition, we are not responsible for any trouble caused by the act of lending or transferring.
- After-sales service rights such as return and replace are applicable only to the customer who purchased the product. After-sales service rights are not transferred even if the product is lent or transferred to a third party.
- When replacing parts or products, we may use alternatives with a different appearance.
- If the warranty has expired, we will provide after-sales service, but the customer will bear the freight and other costs.
- The warranty information on this page is valid only in NA.
- Except for special circumstances, the warranty provided on this page is valid only for the personal use of the product.
- If you would like to replace the product under warranty, you must return the original product to us. After confirmation by our customer support, you need to return the product within a certain period of time. Please note that if you change the time of return without contacting us in advance, you may not be covered by the warranty.
- We do not provide repair services.
- We do not sell assembled products.

About Your Personal information

- The Company and its affiliated companies (hereinafter referred to as "the Company") will handle personal information (hereinafter referred to as "personal information") such as the customer's name and address provided by the customer as follows.
1. We will use your personal information to respond to inquiries about our products, repair and confirm them, develop new products, etc., and keep a record of the contents of your consultation for these purposes. there is.
 2. Personal information will not be disclosed or provided to third parties outside the company, except when the company entrusts a cooperative company to carry out maintenance, it is necessary to perform business or exercise the authority stipulated by laws and regulations, or there are other legitimate purposes
 3. When the person requests disclosure of personal information, we will disclose it to the person without delay. If you wish to be notified of the purpose of use of personal information, correct, add, delete, stop using, or stop providing to third parties, please ontact us at our email address.


Point of Assembly

How to tighten screws


Do not tighten the screws from the beginning

- Tighten all the screws only in halfway at the beginning of the assembly, otherwise the screws might not be aligned with the screw holes and cause further distortion of the chair.

1 Temporarily tighten all screws to 80%

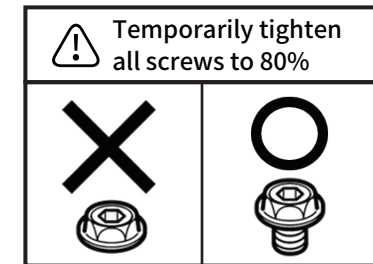


2 Finally, tighten all the screws firmly.

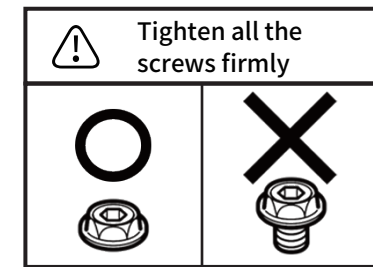

How to tighten the diagonal screws


- ① Install the first screw into any hole and then install the second screw diagonally.
- ② Install the remaining screws.

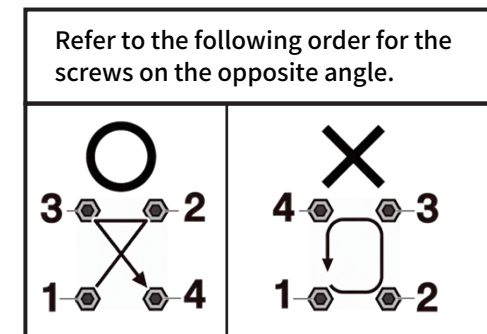
















Please lay the carpet

To protect the floor, place a rug under the unit as shown in the illustration.

- Thick cloth
- Packing cardboard, etc.

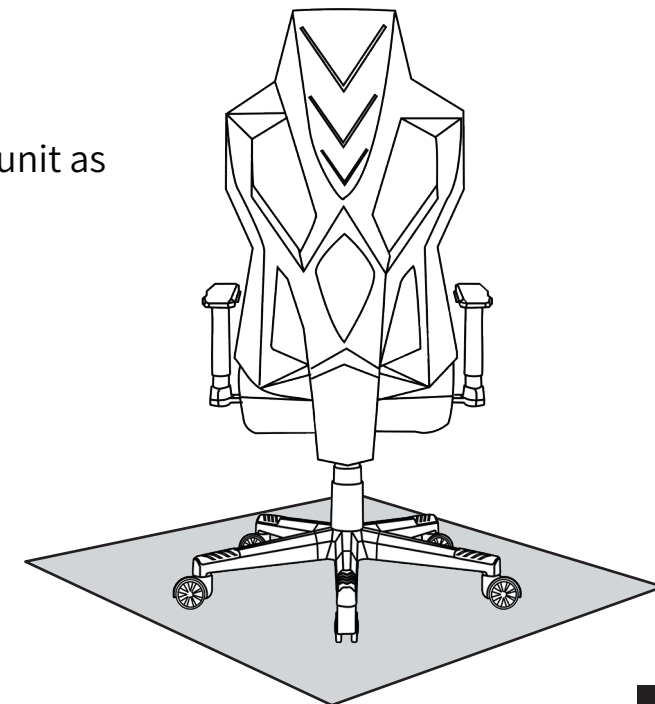

Parts Checking



※ In the event of missing parts or initial failure, please contact our customer support.
 ※ Armrest surface screws pre-installed.



Assembly ①

1 Installation of Base

Insert the Base-2 to Base-1 as shown.

※ Base-1: part like a pentagram, Base -2: slender rod

※ First, loosely insert the Base-2 into the correct position. Please do not fully insert the Base-2 yet to avoid pinching your fingers. Then press the base -1 from above and securely install the base -2.

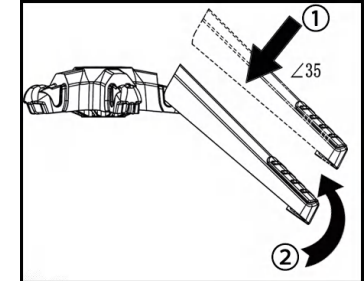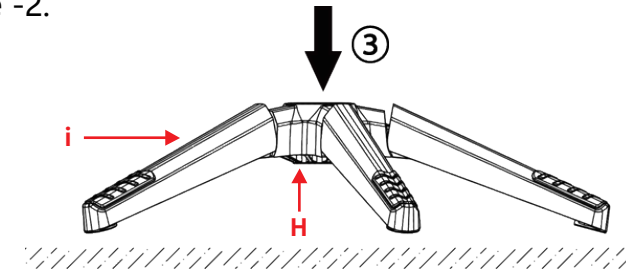


2 Installation of Casters and Gas Cylinder

Turn the base over and insert the casters firmly.


Insert the gas cylinder and cover into the base as shown.

※ To prevent the wheels from coming off, it is a bit difficult to insert.

※ The cylinder coated with lubricating oil. Be careful not to get your hands, clothed, or floor dirty.

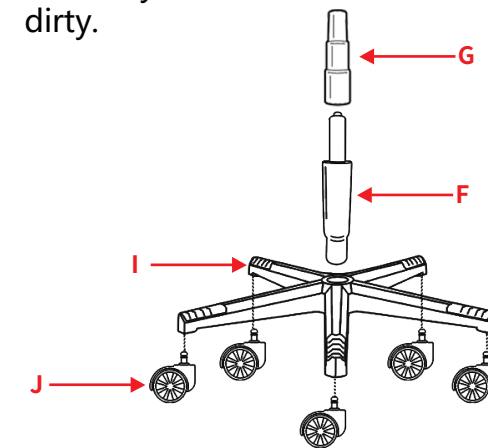


If the wheel is difficult to insert, it is easy to penetrate from above by slow application of force.

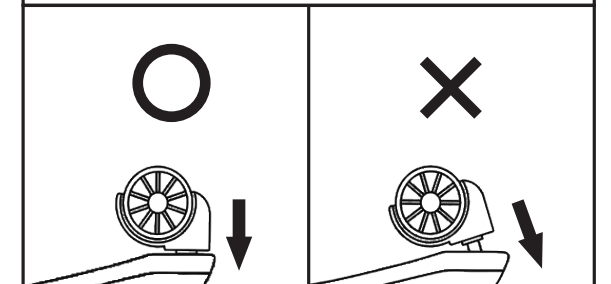

3 Assembled Armrest

• First, please remove the screws that are temporarily tightened.

Screw the armrest surface to the armrest post (two screws)

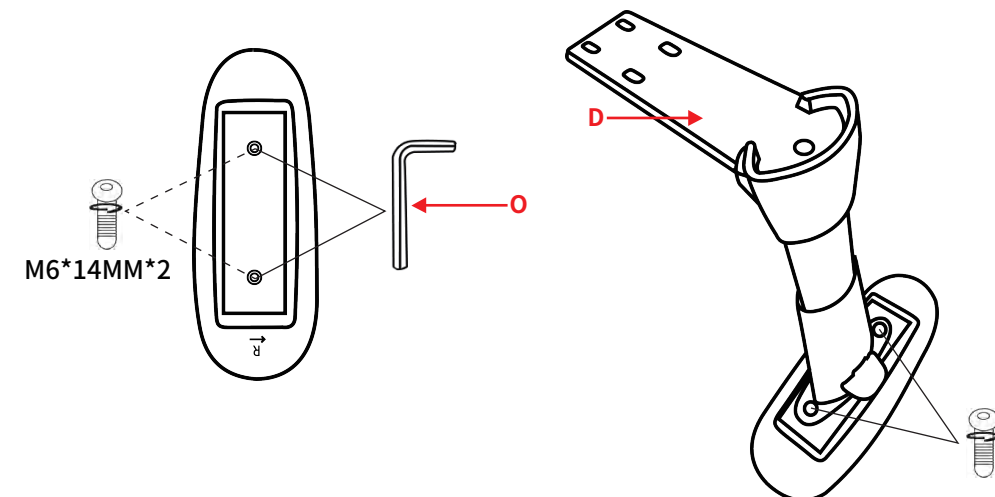



Assembly ②

4 Installation of tilt mechanism and armrest

Firstly, remove the all screws attached to the bottom. Attach the tilt mechanism and armrests to the cushion, then tighten each of the removed screws to their original positions.

※ Point the front mark on the base to the guide rail.



※ Note the distinction between the left and right armrest.

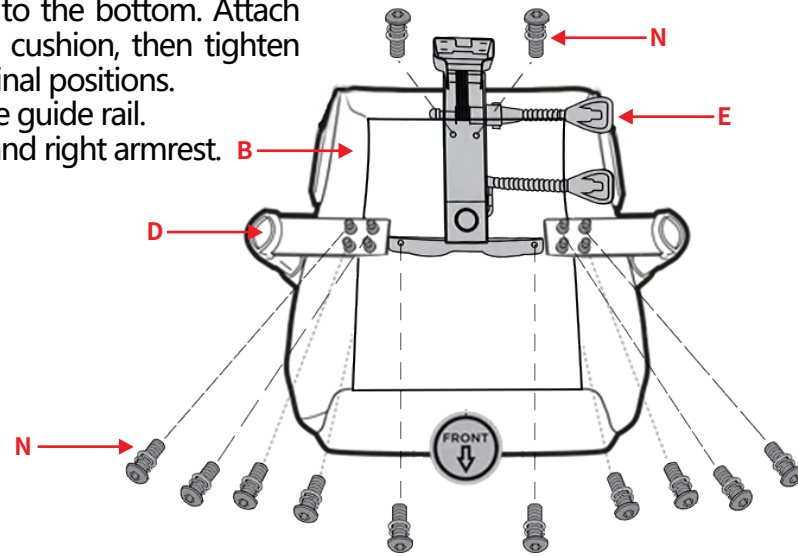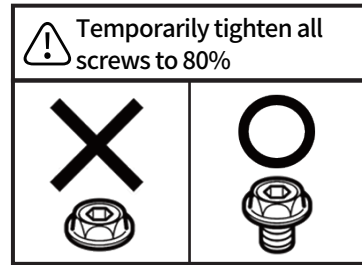


5 Installation of Cushion

Assemble the upper and lower parts of the chair as shown.

※ If lack of energy, or install it by yourself, please place the upper side of the chair on the ground, insert the gas cylinder into the tilt mechanism, and pick up the chair.

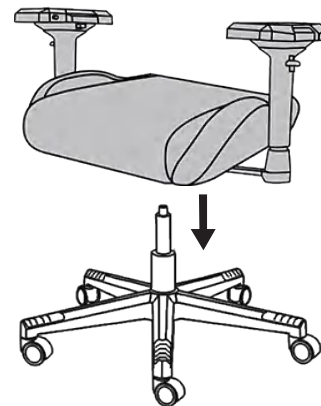

6 Installation of Backrest


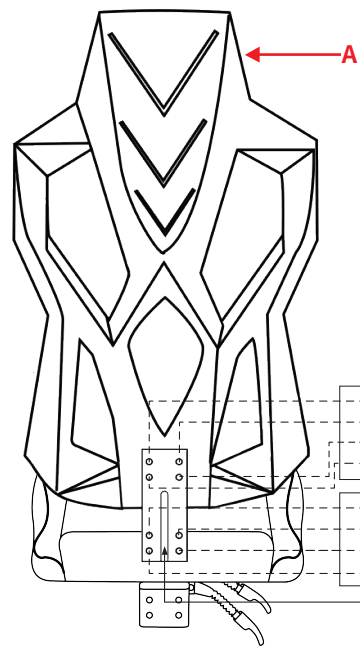


●Align the steel plate with the four holes on the backrest and screw in the 4 screws.

●With the seat cushion in a stable position, insert the back support plate into the tilt mechanism and install the four screws.

※ These 8 screws are stored in the screw pack.

※The back support steel plate has an inclined design, please note that the steel plate is inclined outward when installing.



●Then install the metal back cover and snap it on.


Assembly ③

7 Adjustable headrest and Installation of Lumbar Pillow

• The headrest can be adjusted up and down within a certain range according to your height.

• Fix the lumbar pillow as shown.

※ The lumbar pillow belt is passed through the gap between the backrest and fixed.

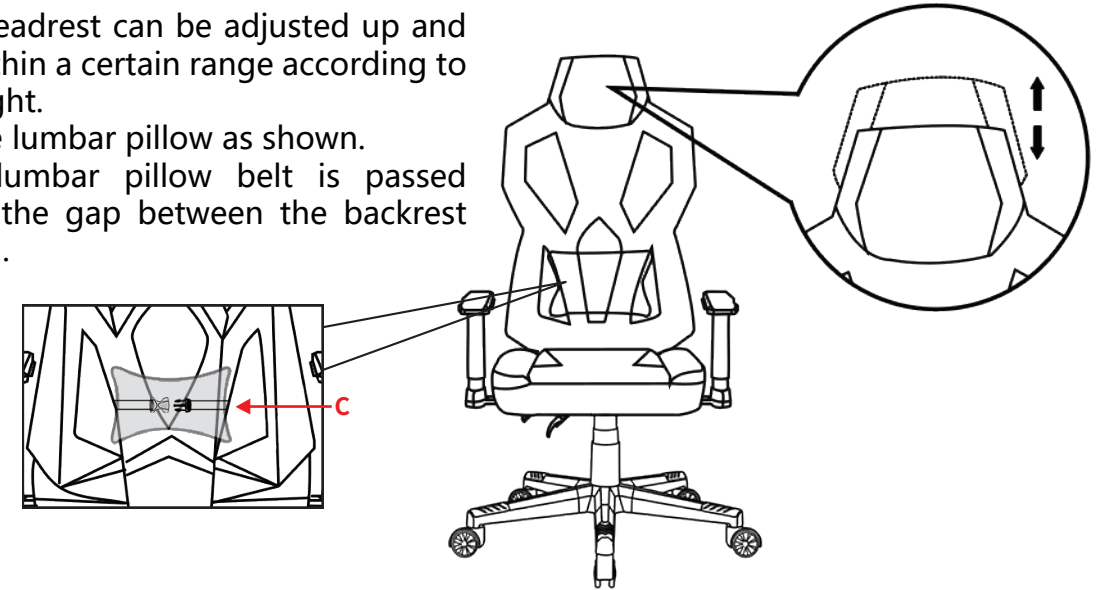


8 Power cord connection

• LED power cord can be connected to power bank or USB port.


※The bottom of the cushion can fix the power bank.

※Input parameters for normal use: voltage 5V, current 2A.

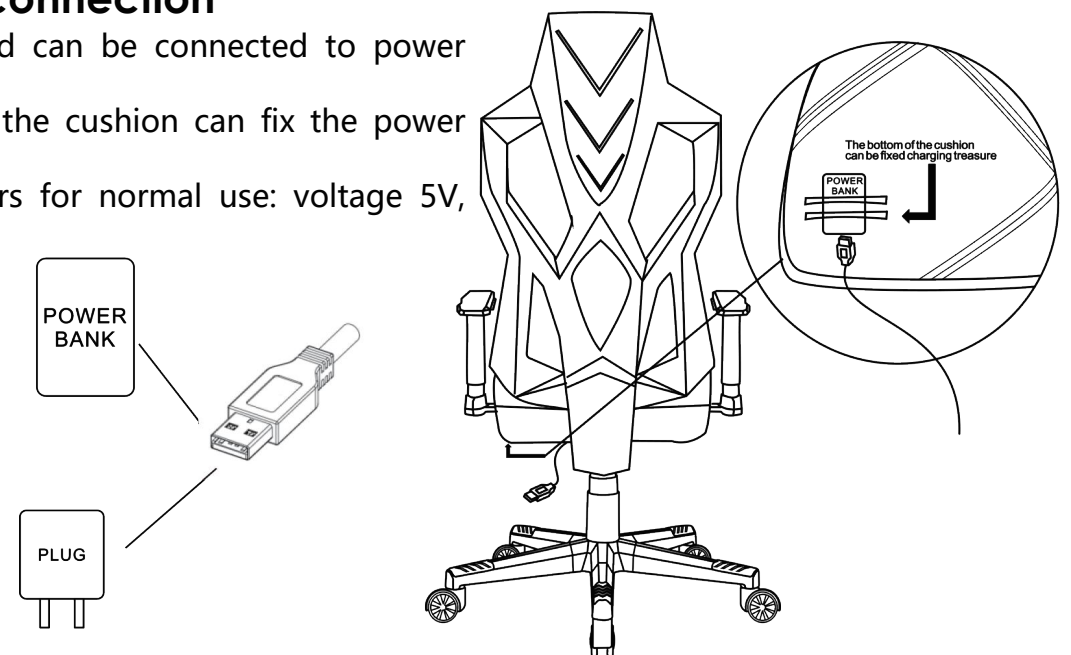


9 Note

• This concludes the assembly. Please confirm whether there is shaking, deformation, etc. Then tighten all screws.

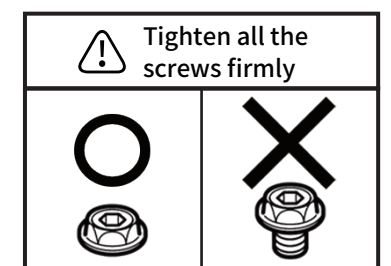


Function Description

height adjustment

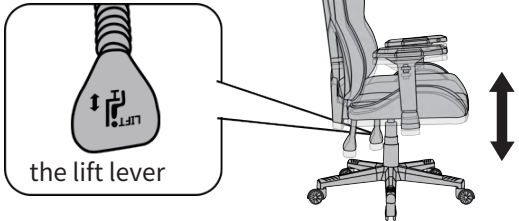


<p>lower the seat height</p>	<p>raise the seat height</p>
<p>raise the lift lever while sitting</p>	<p>raise the lift lever and lift your hips</p>
<p>Precautions</p> <p>●light weight people may have difficulty lowering the seat. In that case,please sit on the seat and try a few more times.</p>	

Armrest adjustment function



<p>●The front and back can be adjusted by pressing the front button.</p>	
<p>●The left and right can be adjusted by pressing the inner button.</p>	
<p>●The height can be adjusted by pressing the outer button.</p>	
<p>●You can also swing from side to side by rotating the armrest.</p>	

reclining function

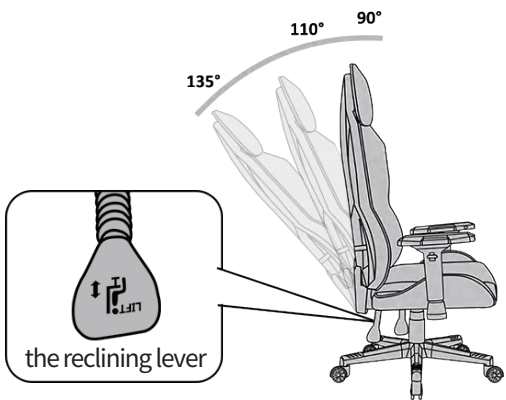

Backrest Angle Adjustment Function

When adjusting the angle of the backrest, sit on the chair and operate the reclining lever.

- Pull the lever up to release the reclining function, and tilt it back to increase the angle of the backrest. If it is the other way around, it will decrease.
- Push the lever down to fix the backrest at the current angle.

When you lie down



When you reduce the backrest angle



Please note

●Do not apply backward force to the backrest until you have pulled the lever. This may cause structural damage. When you adjust the backrest angle significantly, please support the backrest with your hand to avoid hitting yourself with the rotation speed.

When using it for the first time, it may be difficult to adjust, please pull the lever upward vigorously once.

Customer service✉ : Dowinx@vip.126.com

We will get back to you as soon as possible.

Please be sure to provide us with the necessary information above.

※ We will properly handle the personal information we receive, please check the policy (page.02) for details.



SCAN ME



SCAN ME



SCAN ME





DOWiNX

© 2023 Dowinx Components, Inc. All rights reserved.

Dowinx and the language logo are registered trademarks in the United States and/or other countries.

The appearance patent of LS-66LED has been registered in the United States, Europe and Japan.

Product may vary slightly from those pictured.