



Zero Ozone Depletion Potential
IT IS THE BUYERS' RESPONSIBILITY TO ENSURE PRODUCT USE IN ACCORDANCE WITH ALL APPLICABLE CODES AND REGULATIONS.


CAUTION: This product is combustible. Protect from high heat sources. A protective or thermal barrier must be provided when used in accordance with the manufacturer's instructions.
ESR-3088 DRUJTER 1506-03. Audited by INTERTEK TESTING SERVICES.
If stored exposed to weather, cover with waterproof tarpaulin to avoid water staining.
For more information, performancebuildingsolutions.dupont.com and/or call 1-866-583-2585.

**Nominal Board Thickness
R-VALUE**

1/2"	5/8"	3/4"	1"
3.3	4.1	5.0	6.5

An additional R-2.77 (2.8) may be added to the system R-value for 3/4" ideal airspace and horizontal joints. See ASHRAE Fundamentals Handbook for more information.

05/17/2023

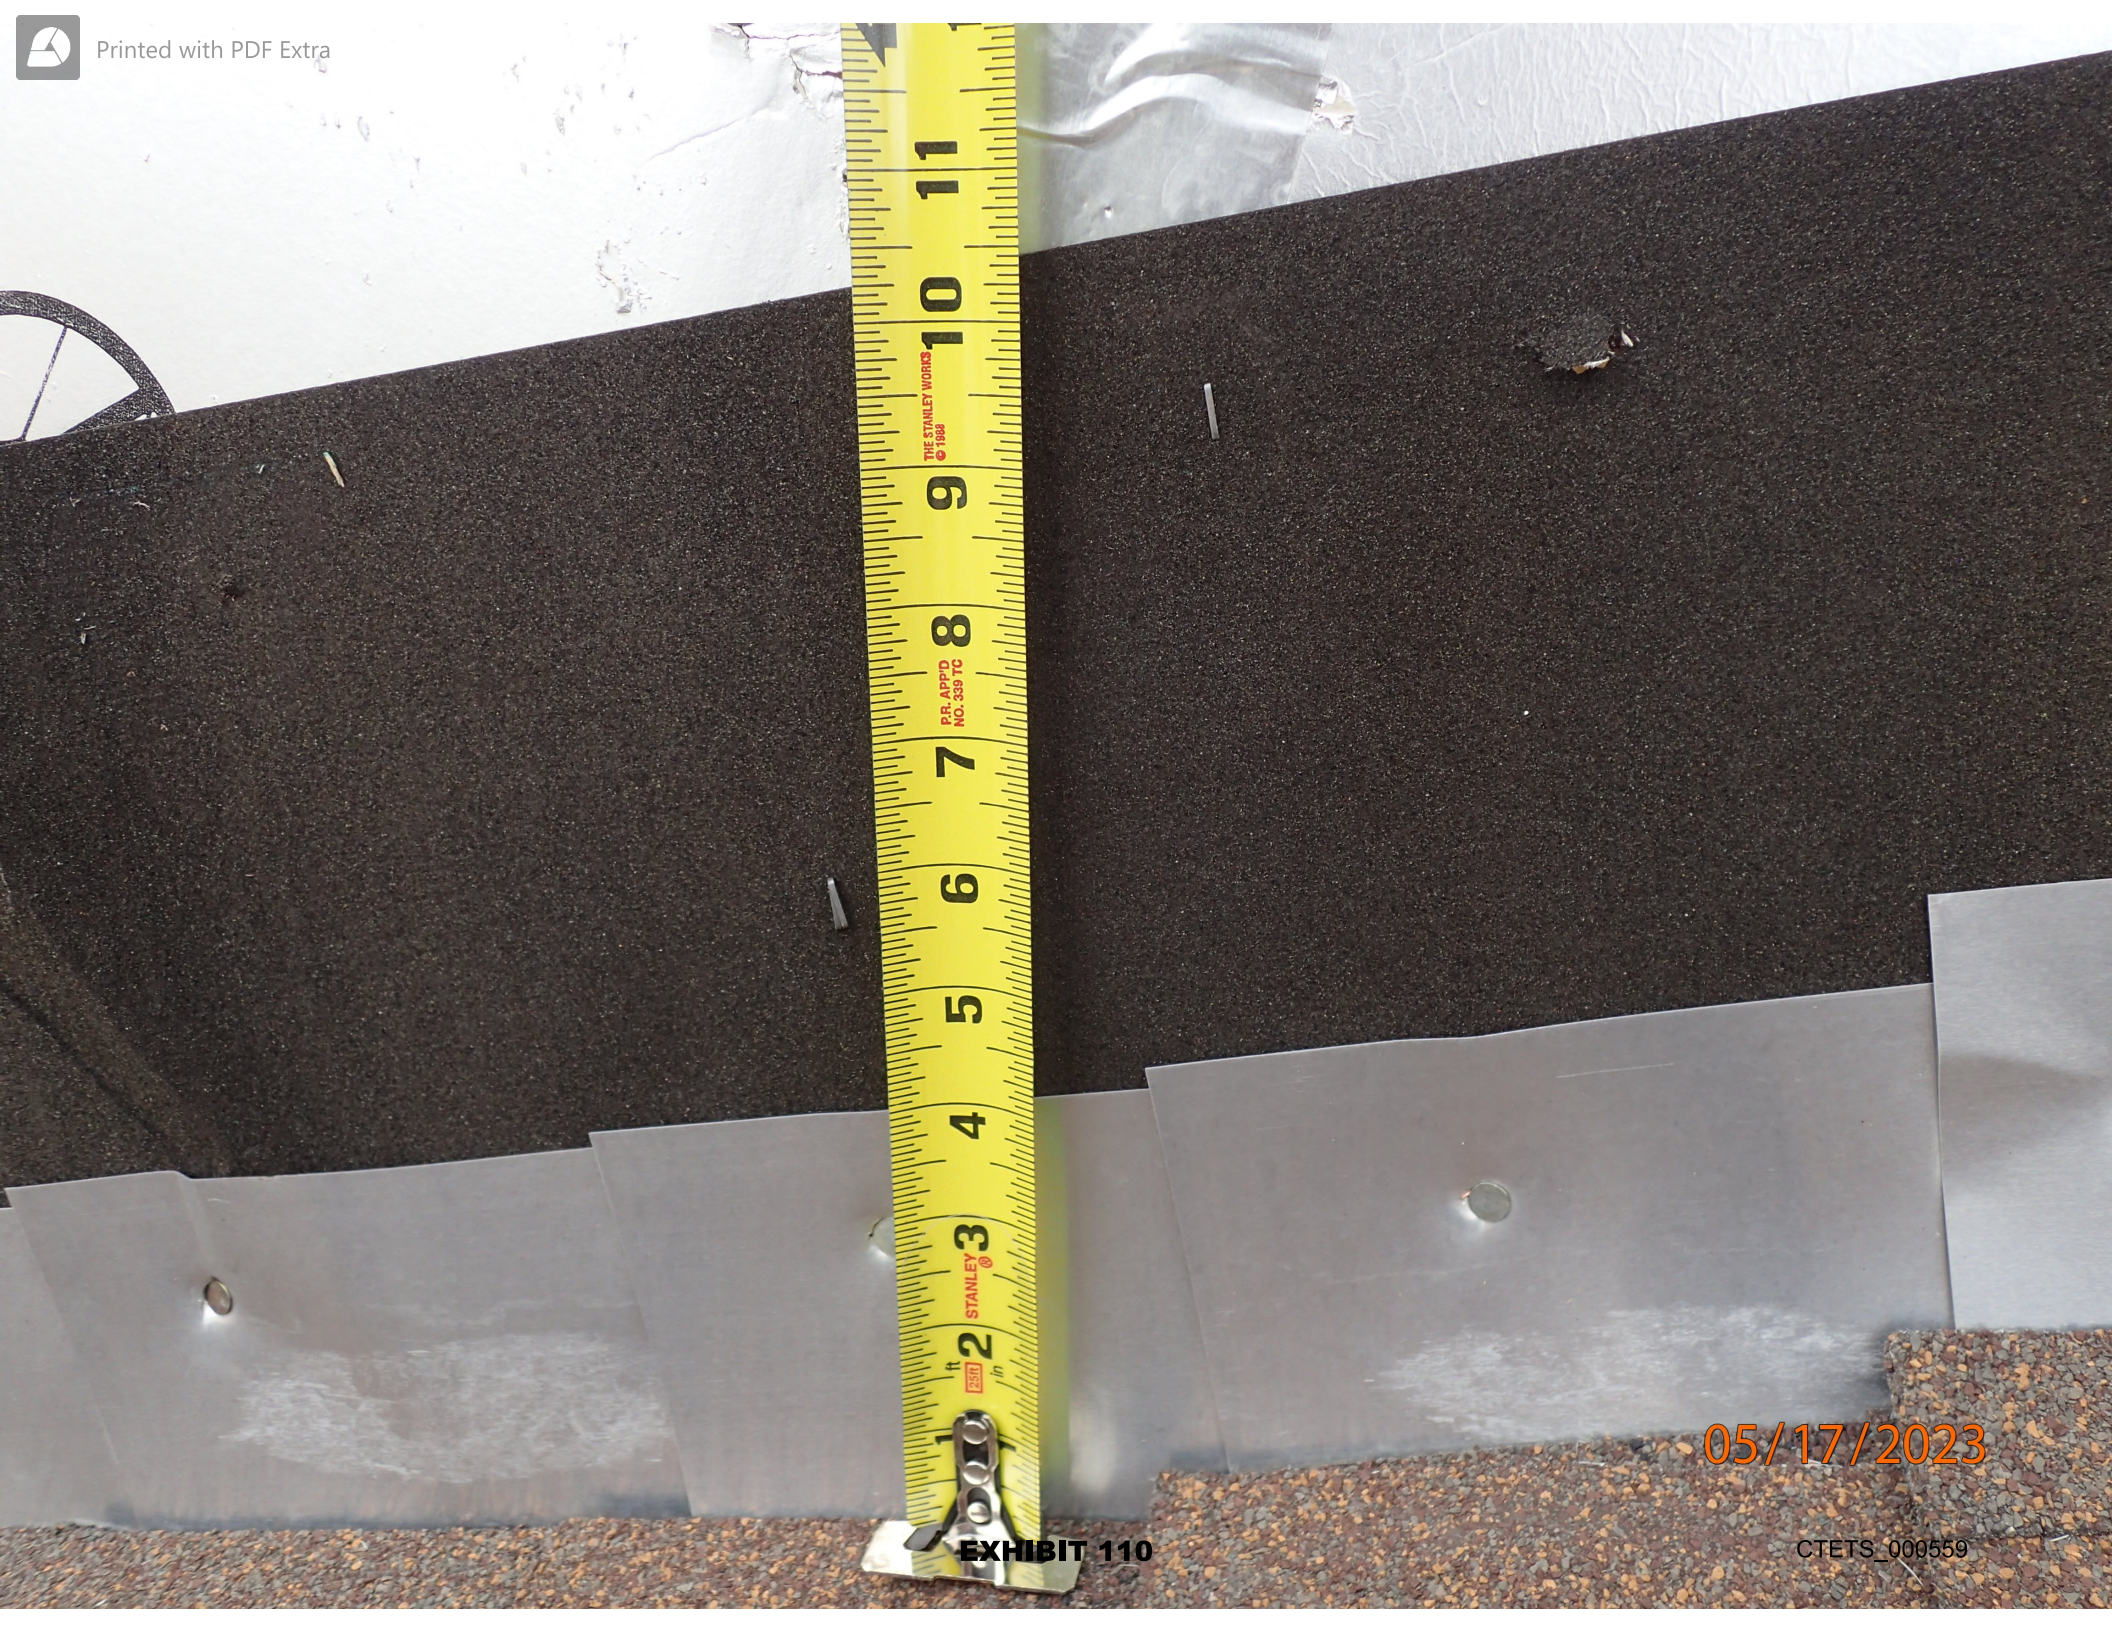

05/17/2023

EXHIBIT 110

CTETS_000559



05/17/2023

EXHIBIT 110

CTETS_000560



05/17/2023

EXHIBIT 110

CTETS_000561



Nomin
 R-VAL
 An addition
 3/4" ideal a
 ASHRAE Fu

Zero Ozone Depletion Potential
 IT IS THE BUYERS' RESPONSIBILITY TO ENSURE PRODUCT USE IN ACCORDANCE WITH A
CAUTION: This product is combustible. Protect from high heat sources. A protective or thermal bar
 ESR-3089 DRJ TER 1506-03 Audited by INTERTEK TESTING SERVICES.
 If stored exposed to weather, cover with waterproof tarpaulin to avoid water staining.
 For more information, performancebuildingsolutions.dupont.com and/or call 1-866-583-2583

05/17/2023



05/17/2023

EXHIBIT 110

CTETS_000563

Handwritten notes on a white label, including the number '47'.

05/17/2023

EXHIBIT 110

CTETS_000564



05/17/2023



05/17/2023